

## *RV Investigator*

### Underway Data Processing Summary Report

<b>Voyage #:</b>	<b>IN2019_V06 Leg2</b>
<b>Voyage title:</b>	Tropical Observations of Atmospheric Convection, Biogenic Emissions, Ocean Mixing, and processes generating Intra-Seasonal SST variability
<b>Depart:</b>	Darwin NT, 20:00 Monday 11 <sup>th</sup> November 2019 AEST
<b>Return:</b>	Darwin NT, 08:00 Tuesday 17 <sup>th</sup> December 2019 AEST
<b>Data dates:</b>	11-Nov-2019 10:35:25 to: 16-Dec-2019 22:00:35 UTC
<b>Chief Scientist:</b>	Dr Alain Protat (BOM)
<b>Data processed by:</b>	Vito Dirita, CSIRO Oceans and Atmosphere, Hobart, Tasmania.



## 1.1 Table of Contents


1.1	Table of Contents .....	2
1.2	Summary .....	3
1.3	Voyage Track .....	3
1.4	Underway Data.....	3
1.5	Completeness and Data Quality.....	4
1.6	Processing Comments.....	4
1.7	Final Underway Data .....	8
1.8	Final Dataset Files.....	9
1.9	References .....	9
1.10	APPENDIX:.....	10

## 1.2 Summary

IN2019\_V06 was a maritime atmospheric research voyage. The primary objectives were to make continuous measurements of the diurnal cycle of convective development in the region of Waruwi and Berrima meteorological stations. This will provide inter-comparison measurements and lead to improved interpretation of measurements from the meteorological stations and forecasting.

The ship moved location several times to take atmospheric measurements in the vicinity of developing storms. There were 335 CTD casts during leg 2, they were part of the 2 major time series undertaken and a small portion of these casts were conducted before, during, and after rain events.

## 1.3 Voyage Track

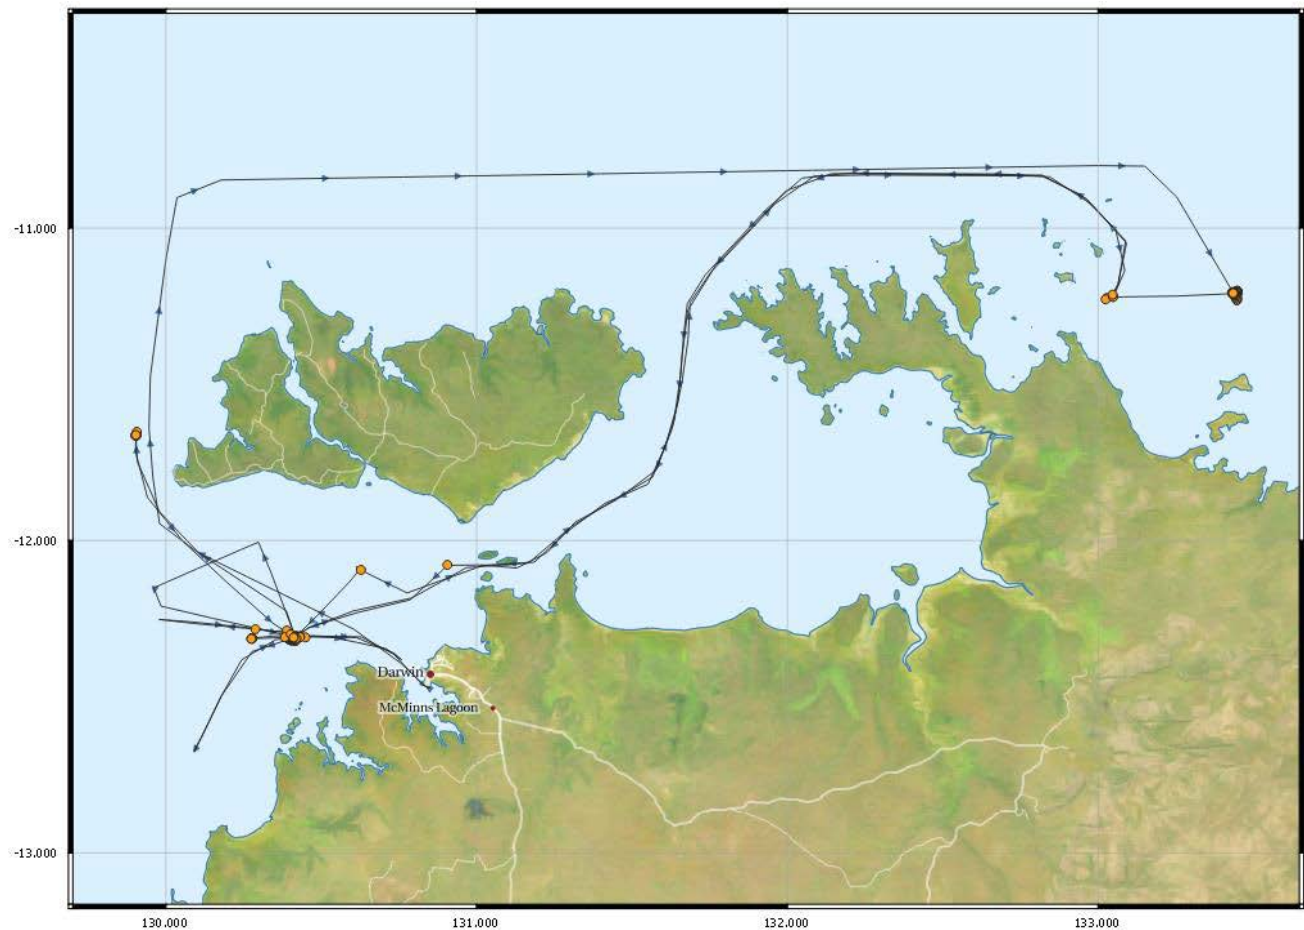

## 1.4 Underway Data

Navigation data is acquired using the Seapath 330 plus position and reference unit, which is also differentially corrected by data from the FUGRO marine cstar 3610 receiver.

The Meteorological data consists of two port/starboard relative humidity and temperature sensors, vane type wind sensor, licor light sensor, dew point and a barometer.

The depth data is derived in order of availability from the Kongsberg EM122 or EM710 multibeam or Simrad EK60 sounders.

Data from the Integrated Marine Observing System sensors (IMOS) are also included. The sensors are port and starboard radiometers and pyranometers, ultrasonic wind speed and direction.

Refer to the Electronics report for this voyage for instruments used and their serial numbers.

Navigation, meteorological, IMOS and depth data are preliminary quality controlled by combining all data from hourly recorded files to 5 second values in a netCDF formatted file. The combined data is referred to as: “underway data”.

A combined file was made on 12<sup>th</sup> February 2020 by running the Java application UWYMerger (V1.8.1) with data time range of: 11-Nov-2019 10:35:25 To:16-Dec-2019 22:00:35, Techsas1 was used as the data source.

Further, it should be noted that the merged data file contains additional underway instrument sensor data that are not quality controlled or processed and is provided for completeness only. This includes data from the air sampling instruments (i.e. two Ozone sensors, Absorption Photometer, Picarro and sampling inlet bearing), pCO<sub>2</sub>, Drop keel position, gyro and Doppler log.

For further description of instruments, their mounted locations and Underway netCDF variables please refer to the Appendix at the end of this report.

## 1.5 Completeness and Data Quality

Navigation data (latitude and longitude, speed over ground, ship heading and course over ground); meteorological data (port and starboard for each of air temperature, relative humidity, relative and true wind speed and direction, PAR light, rain and dew point; and atmospheric pressure) and IMOS data (port and starboard radiometers and pyranometers, ultrasonic relative wind direction and speed).

On the 11<sup>th</sup> December 09:40, both port and starboard met station data was lost when most of the instruments on the foremast were damaged during an electrical storm. The starboard side Rotronic instruments were replaced on the 12<sup>th</sup> of December with the older Vaisala instruments, which have been out of calibration since February. Attempts were made to do the same on the port side without success. In summary:

- (i) Port met data is missing from 11<sup>th</sup> December 09:40 for the remainder of the voyage (15.5% missing).
- (ii) Starboard data is missing only from 11<sup>th</sup> December 09:40 until 12<sup>th</sup> December 02:33 (2% missing).

## 1.6 Processing Comments

**Atmospheric Pressure:** In previous voyages, the atmospheric pressure values (*atmPressure*) showed unusual characteristics. Minor increases and decreases in pressure values were noted. These were investigated and a direct correlation with changing wind direction was noted. It is believed that due to the position of the intake of the atmospheric pressure sensor on the ship’s superstructure, the values were influenced by the prevailing wind and this effect (Bernoulli effect) becomes noticeable during notable wind direction changes. The data has been flagged as good but please note that this issue still persists to some extent. The foremast digital barometer was used.

**Air Temperature:** A number of minor discrepancies between the port and starboard air temperature sensors were noted, otherwise both sensors gave very close readings. These discrepancies usually occur during periods of rapid temperature change. This phenomenon has probably come about due to the rapid warming of the

ship's metal structure and air due to the ship becoming stationary or cooling of the air temperature due to the ship speeding off from stationary or due to the evaporation of rain water around the sensor housing. Furthermore, they also seem to relate to when the ship is stationary with little wind or during/following periods of rainfall or as the result of a change in the ship speed that could be the result of hot exhaust gases being blown over the sensors depending on the wind direction. Furthermore, these temperature differences appear to recur periodically (daily) and are most noticeable in the day time resulting in a maximum temperature difference of 1.2C. Port data missing due to electrical storm, please refer to section 1.5 (i) and (ii) .

**Latitude/Longitude:** No issues found with the latitude and longitude data.

**Dew Point:** Port data missing due to electrical storm, please refer to section 1.5 (i) and (ii).

**Humidity:** Values from 100-103% have been adjusted to 100%, values greater than 103% have been nanded for the starboard sensor. Port data missing due to electrical storm, please refer to section 1.5 (i) and (ii).

**Rain:** Minor discrepancies were found between the port and starboard rain sensors, these differences were less than 0.1mm which is within the  $\pm 1.0$ mm accuracy of the instrument.

**Wind Speed:** Unusual variability between the port and starboard wind speed sensor was observed during the course of the voyage. Issues still persisting with the starboard wind speed sensor, differences greater than 5 knots have been nanded, other sections have been set to suspect. Please note that the cause of the discrepancy is unknown. The port wind speed occasionally flatlines near zero, this is caused by 'stiction' or starting threshold of the instrument which is specified by the manufacturer as 2.1 knots. Data missing due to electrical storm, please refer to section 1.5 (i) and (ii). Additionally, the starboard wind speed and direction sensor had used incorrect calibration coefficients from 2019-12-11 22:07:56 onwards, this range was subsequently re-adjusted back to the correct coefficients and flagged as operator adjusted. This also applies to starboard relative/true wind speed and direction. Please note that this adjustment was not performed on the raw data.

**Wind Direction:** An automated filter was implemented to remove data spikes and was applied to both the port and starboard (true and relative) wind direction. The filter was applied only in a few selected regions which appeared to be very noisy or spiky. The majority of the spikes appeared to have been correctly flagged and removed. However with automated filtering it is possible that a very small percentage of data points may have been misidentified. The filter removes data points when spikes are detected to be more than 50 degrees from the moving average. To further clean the data, some additional manual QC'ing was also applied. Similar issues to wind speed calibration described above also apply to wind direction.

**CourseOG:** Position and velocity (speedOG) are measured by differential GNSS using phase-smoothed pseudo-range and Doppler observations. When using high precision differential corrections a world wide accuracy of 10 -20 cm is possible.

Course Over Ground (COG) describes the direction of motion with respect to the ground that a vessel has moved relative to geographic north pole. Accordingly, should a vessel be stationary, it is not travelling a course (e.g., at the wharf).

Under conditions where a vessel is experiencing leeway (wind, current), a vessel's heading and COG may differ. This difference will typically be largest for vessels moving at slow speeds. When the ship speed is less than 0.5 knots (25.7 cm/s) course over ground values are seen to fluctuate and are highly variable. Course and speed overground were recomputed from 5 second latitude and longitude values (truncated to 7 decimal places, .000001 degree = 11.112 cm).

The resulting course overground values were compared to the original GPS derived values and agreed well, (i.e. a slight smoothing was achieved when the ship was underway and when the ship was almost stationary the result was similarly variable). The course overground data for this voyage has not been filtered and has been flagged as good.

**shipHeading:** No issues found with the shipHeading.

**PAR:** No major issues were found with the port and starboard PAR sensors, however a few data points were marked as suspect for the port and starboard PAR.

**Pyranometer:** No major issues were found with the port and starboard pyranometer sensors, however a few data points were marked as suspect for the port and starboard pyranometer

**Radiometer:** No issues found with the port and starboard Radiometers.

**Ultrasonic Wind Speed:** The ultrasonic wind speed generally reads slightly lower than either the port/starboard vane type wind sensors, this is likely to be due to the lower height mounting on the foremast compared to the other two sensors. Some flat-lined regions have been nanded.

**Ultrasonic Wind Direction:** The relative wind direction values for the ultrasonic wind sensor showed unusual characteristics. This was investigated and it appears that when the wind, more or less, is on the stern of the ship the ultrasonic wind direction values exhibit wild variations (i.e. large spikes) which are not manifested by the two vane type wind sensors to the same extent. It is our belief that this characteristic is most likely caused by the interaction of the ships superstructure/foremast/ship motion and the wind in relation to the ultrasonic wind sensor. The automated wind direction filter was applied only in a few selected regions which appeared to be very noisy or spiky.

**Water Temperature:** Erroneous or suspect data has been NaNed and its flag set to {'bad', 'none', 'operatorFlagged'}.

**Salinity:** No issues found with the salinity data. Spikes greater than 0.01PSU have been removed. TSG S/N 2567 was used for the entire voyage. The TSG systems required regular cleaning and filter changes due to the large amount of organic matter in the water. They operated correctly throughout the voyage and outages were due to filter cleaning and changes, these outages have been nanded.

**TSG Calibration:** During the course of the voyage, bottle salinity samples were collected from the underway seawater supply at regular (every few days) intervals, and the precise time of the sample was recorded. A total of 33 samples were collected and analyzed. These values were compared with the underway salinity measured

by the TSG at the same precise date and time which was used to calculate a scaling coefficient for the TSG using Multiple Linear Regression. This resulted in a scale coefficient of 1.00903270. The residual had a standard deviation (S.D) of 0.275457 PSU. This was then applied to the salinity data and its QC flag set to {'good', 'manually adjusted', 'no error'}. Salinity bottle calibration data can be found in the following file: *in2019\_v06\_Leg2\_TSGCal\_BottleResults.csv*.

**TSG Lag:** Examination and comparison of the TSG water temperature profile against the sea surface water temperature showed a lag of approximately about 2.58 minutes between the two data sets and a mean thermal increase of +0.133C° from the intake keel to the TSG. This lag is due to the time taken for the water to travel from the water intake on the port drop keel (where sea surface water temperature is measured) to the TSG located in the underway sea water lab on the ship (where the TSG sensor temperature and the conductivity is measured). When the precise location for the TSG salinity measurement is critical, this lag would need to be taken into account in order to determine the exact geolocation of the sampled value. For example, assuming a ship cruising speed of 10 knots and a lag of 2.58 minutes, the salinity measurements could be for a location about 697 meters away from the current ship location. Please note that the TSG and SBE38 SST intakes are located on the port drop keel, the intake depths are described in the Appendix [Table 3](#).

**Depth:** Finally, the Depth data is no longer processed as part of the underway data set. The non QC'd data is available in the underway data. The QC'd depth data could be obtained from processed GSM dataset (centre beam) for this voyage.

It should be noted that the underway netCDF file contains the raw unQC'd data. Therefore even though the QC'd variable may have been NaNed or otherwise adjusted or filtered, the raw data variable is always available in the netCDF underway file. This is useful if the end user wishes to apply a different QCing or filtering methodology.

### Comparing Port and Starboard Sensors:

The following table compares the mean-absolute-difference and max-absolute-differences between port and starboard sensor outputs prior to and after QCing has been applied. Note that the **After QC:** column only accounts for values which are flagged as good.

Sensor:	Before QC		After QC:		Units:
	<i>mean(abs(diff))</i>	<i>max(abs(diff))</i>	<i>mean(abs(diff))</i>	<i>max(abs(diff))</i>	
IN2019_V06 Leg2					
Air Temp	0.15	31.4	0.15	2	Degree Celsius
Humidity	1.32	82.3	1.32	6.3	%RH
relWindSpeed	0.6	32.05	0.52	16.74	knot
trueWindSpeed	0.63	32.05	0.54	16.74	knot
relWindDir	5.22	179.96	5.17	179.93	Degree
trueWindDir	5.86	179.95	5.8	179.94	Degree
PAR	51.12	1513	48.06	1361	$\mu E/m^2/s$
Pyranometer	21.11	851.3	20.1	702	$W/m^2$
Radiometer	3.14	15.5	3.14	15.5	$W/m^2$
Rain	0	2.06	0	2.06	mm



<b>waterTemp - tsgSensorTemp</b>	0.14	7.66	0.14	1.16	<i>Degree Celsius</i>
<b>Dew Point</b>	0.26	1.2	0.26	0.8	<i>Degree Celsius</i>

## Commonly Used QC Flags:

The datasets include quality control (QC) flags which are described in more detail in the references provided, normally however only a small subset is used, below are the most commonly used qc flags. Please note that on some systems and file formats, eg. netCDF, it is not possible to store unsigned byte values. In this case, flags greater than 127 are stored as negative numbers. To convert them to unsigned integers, simply add 256.

QC Flags Description					
Signed	Unsigned	Description	Data State	Operation Type	Error Type
-123	133	Bad (data is NaNed)	Bad	None	Error Flagged by processor
0	0	Good	Good	None	No error, data is good
-187	69	Suspect (data unchanged)	Suspect	None	Error flagged by processor
-135	121	Operator adjusted	Suspect	Manually adjusted	Data out of range
-115	141	Data missing	Bad	None	No data, missing for unknown reason
-53	203	not QC'd	No QC	None	Preliminary processing (calibration) only
-199	57	Operator adjusted	good	Manually Adjusted	Data out of range
-203	53	Re-calibrated	good	Manually Adjusted	Operator flagged

## 1.7 Final Underway Data

The navigation, meteorological and thermosalinograph data will be entered into the O&A divisional data warehouse. All data timestamps are in UTC.

Final Underway (csv) QC'd Data:						
	Parameter Name:	parameterQC:	% Good	% Suspect	% Bad	% Missing
1	latitude	latitudeQC	100	0	0	0
2	longitude	longitudeQC	100	0	0	0
3	speedOG	speedOGQC	100	0	0	0
4	courseOG	courseOGQC	100	0	0	0
5	shipHeading	shipHeadingQC	100	0	0	0
6	portAirTemp	portAirTempQC	84.45	0	0	15.54
7	stbdAirTemp	stbdAirTempQC	97.99	0	0	2.01
8	portHumidity	portHumidityQC	84.45	0	0	15.55
9	stbdHumidity:	stbdHumidityQC	89.06	0	8.73	1.98
10	atmPressure:	atmPressureQC	99.96	0.04	0	0
11	portRelWindDir	portRelWindDirQC	84.41	0	0.05	15.55
12	stbdRelWindDir	stbdRelWindDirQC	84.68	0	0.38	1.22
13	portTrueWindDir	portTrueWindDirQC	84.4	0	0.06	15.55
14	stbdTrueWindDir	stbdTrueWindDirQC	84.67	0	0.38	1.22
15	portRelWindSpeed	portRelWindSpeedQC	84.4	0.05	0	15.54
16	stbdRelWindSpeed	stbdRelWindSpeedQC	83.46	1.14	1.96	1.18
17	portTrueWindSpeed	portTrueWindSpeedQC	84.45	0	0	15.55
18	stbdTrueWindSpeed	stbdTrueWindSpeedQC	83.16	0.5	3.35	1.22



19	maxWindGust	maxWindGustQC	84.45	0	15.55	0
20	portRain	portRainQC	100	0	0	0
21	stbdRain	stbdRainQC	100	0	0	0
22	portPAR	portPARQC	99.71	0.29	0	0
23	stbdPAR	stbdPARQC	99.44	0.56	0	0
24	portDewPoint	portDewPointQC	84.45	0	5.01	10.54
25	stbdDewPoint	stbdDewPointQC	84.45	0	0.01	15.54
26	portPyranometer	portPyranometerQC	99.9	0.1	0	0
27	stbdPyranometer	stbdPyranometerQC	99.7	0.3	0	0
28	portRadiometer	portRadiometerQC	100	0	0	0
29	stbdRadiometer	stbdRadiometerQC	100	0	0	0
30	ultrasonicRelWindSpeed	ultrasonicRelWindSpeedQC	99.98	0	0.02	0
31	ultrasonicTrueWindSpee	ultrasonicTrueWindSpeedQC	99.99	0	0.01	0
32	ultrasonicRelWindDir	ultrasonicRelWindDirQC	99.33	0	0.67	0
33	ultrasonicTrueWindDir	ultrasonicTrueWindDirQC	99.28	0	0.72	0
34	salinity	salinityQC	97.30	0	2.62	0.08
35	waterTemp	waterTempQC	99.93	0	0	0.07

## 1.8 Final Dataset Files

The final datasets for publication and distribution:

Final Dataset Files	
<b>IN2019_V06 Leg2uwy5sec.csv</b>	5 second resolution csv format dataset of QC'd parameters
<b>IN2019_V06 Leg2uwy10sec.csv</b>	10 second resolution csv format (interpolated) dataset of QC'd parameters
<b>IN2019_V06 Leg2uwy1min.csv</b>	1 minute resolution csv format (interpolated) dataset of QC'd parameters
<b>IN2019_V06 Leg2uwy5min.csv</b>	5 minute resolution csv format (interpolated) dataset of QC'd parameters
<b>IN2019_V06 Leg2uwy.nc</b>	5 second resolution netcdf format full dataset including unQC'd data

## 1.9 References

Subversion repository version of DPG Matlab generic tools 3974

Pender, L., 2000. Data Quality Control flags.

[http://www.marine.csiro.au/datacentre/ext\\_docs/DataQualityControlFlags.pdf](http://www.marine.csiro.au/datacentre/ext_docs/DataQualityControlFlags.pdf)

Atmospheric sensors:

[\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Met Station\Documentation\Met Instrument Location Survey\Radialshots\\_Weathersensors\\_Rev4.pdf](\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Met Station\Documentation\Met Instrument Location Survey\Radialshots_Weathersensors_Rev4.pdf)

## 1.10 APPENDIX:

**TABLE-1: Underway Sensors**

The table below contains the description of Ship sensors and Underway netCDF variables.

Underway Data Instrument and Identifier	Sensor Description	Position	netCDF variable	QC	Variable Description	Variable units
<b>Navigation Instruments:</b>						
Seapath 330+ with Seatex MRU 5+ and FUGRO Seastar 3610 DGNSS receiver	DGPS system providing position, attitude, velocity, acceleration and timing information.	Monkey Island & Bridge equipment room				
			Longitude	yes	Longitude	Degree East
			Latitude	yes	Latitude	Degree North
			speedOG	yes	Ship speed over ground	Knot
			courseOG	yes	Ship course over ground	Degree
			shipHeading	yes	Heading of the ship	Degree
			alt	no	Altitude re: mean sea level (geoid)	Metres
Northrup Grumman Sperry 4914-CA Navigat X MK1	Gyrocompass	Bridge				
			gyroHeading	No	Gyro Heading	Degree
Kongsberg Maritime Skipper DL850	3 Axis doppler log - measuring vessel speed through water	Gondola				
			longitudinalWaterSpeed	No	Longitudinal water speed	knot
			transverseWaterSpeed	No	Transversal water speed	knot
			longitudinalGroundSpeed	No	Longitudinal ground speed	knot
			transverseGroundSpeed	No	Transversal ground speed	knot
		lockOnWater		No	Lock on water flag	n/a
			lockonGround	No	Lock on ground flag	n/a
<b>Sea Water Instruments:</b>						
Sea-Bird-SBE 21 TSG	Thermosalinograph (TSG)	CTD Space				
			salinity	Yes	Measures sea surface salinity	Practical Salinity Units (PSU)
			tsgSensorTemp	No	Water temperature measurement in the TSG canister	Degree Celsius (degC)
Burkert 8045	Flow meter	CTD space				
			tsgFlow	No	Flow rate of sea water through the TSG	l/min
Burkert 8045	Flow meter	Underway Seawater Lab				
			labMainFlow	No	Underway lab main seawater flow rate	l/min
Kobold MIK-C	Flow meter	Underway Seawater Lab				
			labBranchFlow	No	Underway lab branch seawater flow rate	l/min
Sea-Bird - SBE 38	Remote Temperature Probe	Port Drop Keel				

			waterTemp	Yes	Sea surface water temperature measurement	Degree Celsius (degC)
Wet Labs Wetstar Fluorometer	Fluorometer	Underway Seawater Lab				
			fluorescence	No	Measures active phytoplankton biomass and chlorophyll concentrations	Percentage of the full scale voltage
CSIRO Hobart pCO2	Underway pCO <sub>2</sub> system measuring surface water CO <sub>2</sub> mole fraction	Underway Seawater Lab				
			equTemp	No	Equilibrator water temperature	Degree Celsius (degC)
			XCO2	No	XCO2	ppm
			waterVapour	No	Water vapour	mmol/mole
			licorPressure	No	Licor pressure	hPa
			equPressure	No	Equilibrator pressure	hPa
			waterFlow	No	Water flow	l/min
			licorFlow	No	Licor flow	ml/min
			ventFlow	No	Vent Flow	ml/min
			condTemp	No	Condenser Temperature	Degree Celsius (degC)
			pumpSpeed	No	CO2 Pump Speed	l/min
Aanderaa Oxygen Optode 3835	<b>Oxygen Sensor</b>	<b>Underway Seawater Lab</b>				
			do		oxygen	uM
			doSaturation		Air saturation	Percentage (%)
			optodeWaterTemp		Optode water temperature	Degrees Celsius (degC)
CSIRO Drop keel sensor	Measuring drop keel draft	Port & starboard				
			portKeelExtension		Port drop keel extension	meters
			starboardKeelExtension		Starboard drop keel extension	meters
<b>Met Instruments:</b>						
Rotronic T&RH HC2A-S3	Temperature and Humidity Sensor	Foremast (Starboard)				
			stbdAirTemp	Yes	Starboard air temperature measurement	Degree Celsius (degC)
			stbdHumidity	Yes	Starboard humidity measurement	Percentage (%)
			stbdDewPoint	Yes	Starboard Dew Point	Degree Celsius (degC)
Rotronic T&RH HC2A-S3	Temperature and Humidity Sensor	Foremast (Port)				
			portAirTemp	Yes	Port air temperature measurement	Degree Celsius (degC)
			portHumidity	Yes	Port humidity measurement	Percentage (%)
			portDewPoint	Yes	Port Dew Point	Degree Celsius (degC)
Vaisala Ship's Barometer PTB330	Atmospheric pressure	Bridge Wing	atmPressureBridge	Yes	Atmospheric pressure measurement	Millibar (mbar)
Vaisala Ship's Barometer PTB330	Atmospheric pressure	Foremast	atmPressure	Yes	Atmospheric pressure measurement	Millibar (mbar)

RM Young Wind Sensor Type 05107	Vane type wind sensor	Foremast (Port)				
			portRelWindSpeed	Yes	Wind speed relative to the ship	knot
			portRelWindDir	Yes	Wind direction relative to the ship	Degree
			portTrueWindSpeed	Yes	True wind speed, corrected for ship speed	knot
			portTrueWindDir	Yes	True wind direction, corrected for ship heading	Degree
			maxWindGust	Yes	True maximum wind gust corrected for ship speed	knot
RM Young Wind Sensor Type 05108	Vane type wind sensor	Foremast (Starboard)				
			stbdRelWindSpeed	Yes	Wind speed relative to the ship	knot
			stbdRelWindDir	Yes	Wind direction relative to the ship	Degree
			stbdTrueWindSpeed	Yes	True wind speed, corrected for ship speed	knot
			stbdTrueWindDir	Yes	True wind direction, corrected for ship heading	Degree
Gill WindObserver II	Ultrasonic Wind Sensor	Foremast (Port)				
			ultrasonicRelWindSpeed	Yes	Wind speed relative to the ship	knot
			ultrasonicRelWindDir	Yes	Wind direction relative to the ship	Degree
			ultrasonicTrueWindSpeed	Yes	True wind speed, corrected for ship speed and direction	knot
			ultrasonicTrueWindDir	Yes	True wind direction, corrected for ship speed and heading	Degree
RM Young Rain Gauge type 50202	Syphoning Rain Sensor	Foremast				
			portRain	Yes	Accumulated hourly rain	mm
			stbdRain	Yes	Accumulated hourly rain	mm
Eppley PIR	Precision Infrared Radiometer	Monkey Island (Starboard)				
			stbdRadiometer	Yes	Measure radiation in the band 4-100 micron, longwave radiation	W/m <sup>2</sup>
Eppley PIR	Precision Infrared Radiometer	Monkey Island (Port)				
			portRadiometer	Yes	Measure radiation in the band 4-100 micron, longwave radiation	W/m <sup>2</sup>
Eppley PSP	Precision Spectral Pyranometer	Monkey Island (Starboard)				
			stbdPyranometer	Yes	Measure radiation in the band 0.2 - 4 micron, shortwave radiation	W/m <sup>2</sup>
Eppley PSP	Precision Infrared Radiometer	Monkey Island (Port)				
			portPyranometer	Yes	Measure radiation in the band 0.2 - 4 micron, shortwave radiation.	W/m <sup>2</sup>

LI-COR LI-190 Quantum Sensor	Photosynthetically Active Radiation	Monkey Island (Starboard)				
			stbdPAR	Yes	measures radiation in the photosynthetically active region of 0.4-0.7 micron	$\mu\text{E}/\text{m}^2/\text{s}$
LI-COR LI-190 Quantum Sensor	Photosynthetically Active Radiation	Monkey Island (Port)				
			portPAR	Yes	measures radiation in the photosynthetically active region of 0.4-0.7 micron	$\mu\text{E}/\text{m}^2/\text{s}$
Uni-Southampton ISAR SST	Radiation sea surface temperature	Bridge Wing (Port)				
			isarWaterTemp	No	ISAR Water Temperature	Degree Celsius (degC)

### Air Sampling Systems:

CSIRO air sampling inlet	Air inlet controller	foremast				
			inletBearing	No	Air sampling inlet bearing	degree
			trackingBearing	No	Tracking target bearing	degree
Thermo Scientific MAAP Model 5102	Multi-angle Absorption Photometer (MAAP)	Aerosol Lab (air sampling inlet)				
			blackCarbonConc	No	Concentration of black carbon	$\mu\text{g}/\text{m}^3$
			airFlow	No	Air flow rate	Litre per Hour (L/h)
Thermo Scientific Model 49i Ozone Analyzer	Ozone Monitor					
			o3Ozone1	No	Ozone measurement	ppb
			ozone1Meterflags	No	Instrument specific quality flag	n/a
Thermo Scientific Model 49i Ozone Analyzer	Ozone Monitor					
			o3Ozone2	No	Ozone measurement	ppb
			ozone2Meterflags	No	Instrument specific quality flag	n/a
Picarro Model G2301 CRDS Analyzer	Greenhouse Gas Spectrometer CO <sub>2</sub> , CH <sub>4</sub> , H <sub>2</sub> O Near IR Laser					
			co2Dry	No	CO <sub>2</sub> dry concentration	ppm
			ch4Dry	No	CH <sub>4</sub> dry concentration	ppm
			H2O	No	Water concentration percentage	Dimensionless

### Depth:

Kongsberg EM122 multibeam sounder		Gondola	depth	No	Water depth,	meters
Kongsberg EM710 multibeam sounder		Gondola	depth	No	Water depth,	meters
EK60, 18KHz sounder		Port Drop Keel	Depth, (if not provided by EM122 or EM710)	No	Water depth	meters

**TABLE-2: Location of Meteorological Instruments:**

<b>Date:</b>	26/03/2019					
<b>Surveyors:</b>	Stuart Edwards					
	Matt Boyd					
	CSIRO GSM Team					
<b>Instrument:</b>	Leica TCRP 1205+ Total Station AND extrapolation from drawings					
Sensors surveyed with respect to existing vessel coordinate system:						
	X-axis is positive toward starboard and perpendicular to Y -axis					
	Y-axis is positive forward and parallel to vessel centreline keel					
	Z-axis is positive upwards					
CRP is MRU5+ located in transceiver room on 1st platform deck						
MRU5+ is 2.066m to Starboard of the V/L centreline & 53.439m fwd from transom. (Obtained from Parker Maritime)						
ΔH of Load Line measured from 02 level with Plumbob and tape, 9m from 02 Deck. Height of 02 deck calculated to be 8.707m above CRP on 1st Plat deck. Load Line height datum below vessel CRP						
ID	Description	X	Y	Z	Comment	Final Height Above Summer Load Line
LL	Summer Load Line	7.222	-10.695	-0.293	Waterline reference	0.000
WS1	Foremast Propeller Anemometer Stbd	-0.513	35.811	24.487	Measured to base of sensor	24.780
WS2	Foremast Propeller Anemometer Port	-3.361	35.867	24.228	Measured to base of sensor	24.521
WS3	Foremast Gill Ultrasonic Anemometer	-3.344	35.986	21.812	Measured to base of sensor	22.105
WS4	Precipitation Sensor Siphoning Port (formerly called "Central")	-2.621	35.999	21.260	Measured to base of sensor	21.553
WS10	Monkey Island Radiometer Plate Stbd	-0.164	-0.430	24.980	Measured to centre bottom face of disc	25.273
WS11	Monkey Island Radiometer Plate Port	-3.753	-0.389	24.927	Measured to centre bottom face of disc	25.220
WS12	Bridge Digital Barometer	-1.559	-4.243	20.265	Measured to centre of unit	20.558
WS13	SST Radiometer (Port Bridge Wing)	-11.77	-3.3	19.3	Measured to centre of bottle (Taped Measurement)	19.593
	Foremast T&RH Sensor (Port)	-2.636	35.1	24.451	Relative measurements and estimates from drawings	24.744
	Foremast T&RH Sensor (Starboard)	-1.253	35.101	24.451	Relative measurements and estimates from drawings	24.744
	Precipitation Sensor Siphoning (Starboard)	-1.241	35.101	21.260	Relative measurements and estimates from drawings	21.553
	Foremast Digital Barometer	-3.316	32.596	9.61	Relative measurements and estimates from drawings	9.903

**TABLE-3: Drop Keel Data**

Drop Keel Position	Reference Point	Vertical Offset in metres (positive up)			
		Flush with Hull	Flush with gondola	Intermediate	Fully extracted
<b>Drop Keel Extension</b>	<b>Base of Hull</b>	<b>0.00</b>	<b>-1.194</b>	<b>-2.00</b>	<b>-4.00</b>
Base of Hull	Ship's Central reference Point (CRP)	-6.54			
Base of Drop Keel	CRP	-6.54	-7.73	-8.54	-10.54
SBE38 SST Intake	Base of Drop Keel	0.30			
SBE38 SST Intake	CRP	-6.24	-7.43	-8.24	-10.24
Summer Load Line (SLL)	CRP	-0.29			
<b>SBE38 SST Intake</b>	<b>SLL (ie Depth below waterline)</b>	<b>-5.95</b>	<b>-7.14</b>	<b>-7.95</b>	<b>-9.95</b>
TSG Intake	Base of Drop Keel	0.54			
TSG Intake	CRP	-6.00	-7.19	-8.00	-10.00
<b>TSG Intake</b>	<b>SLL (ie Depth below waterline)</b>	<b>-5.71</b>	<b>-6.90</b>	<b>-7.71</b>	<b>-9.71</b>

The above information was compiled from the following CSIRO internal documents:

- [1] [\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\GSM\RV Investigator\Calibration Data and Reports\Dimensional Control Report\13000615B\\_RV Investigator.pdf](\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\GSM\RV Investigator\Calibration Data and Reports\Dimensional Control Report\13000615B_RV Investigator.pdf)
- [2] [\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Met Station\Documentation\Met Instrument Location Survey\Radialshots\\_Weathersensors\\_Rev4.xlsx](\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Met Station\Documentation\Met Instrument Location Survey\Radialshots_Weathersensors_Rev4.xlsx)
- [3] <\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Drop Keels\RV Investigator Drop Keel Arrangements.docx>