


## *RV Investigator*

### ADCP Processing Report

<b>Voyage ID:</b>	in2019_v06
<b>Voyage title:</b>	Tropical observations of atmospheric convection, biogenic emissions, ocean mixing, and processes generating intraseasonal SST variability
<b>Mobilisation:</b>	Darwin, Friday, 18 October 2019
<b>Depart:</b>	Darwin, 1030 UTC Saturday, 19 October 2019
<b>Return:</b>	Darwin, 2200 UTC Monday, 16 December 2019
<b>Demobilisation:</b>	Darwin, Tuesday, 17 December 2019
<b>Voyage Manager:</b>	Don McKenzie
<b>Chief Scientist:</b>	Alain Protat
<b>Affiliation:</b>	CSIRO/WHOI
<b>Report compiled by:</b>	Richard Atkinson

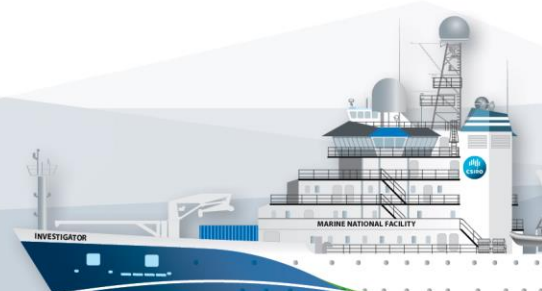

## Contents

1	Summary.....	3
2	Processing Background.....	3
3	Processing Notes .....	3
4	Area Covered .....	4
6	netCDF Data Headers .....	6
6.1	in2019_v06_os75nssb.nc.....	6
6.2	in2019_v06_os150nb.nc.....	10
6.3	in2019_v06_os150bb.nc.....	14

# 1 Summary

Data was collected during in2019\_v06 for the duration of the voyage. Data was collected using UHDAS and post-processed using CODAS.

The voyage consisted of two legs, with a port visit on 11 November 2019. The ADCP data for both legs have been processed as one dataset. Leg 1 was 19 October to 11 November 2019, Leg 2 from 11 November to 17 December 2019.

The RDI Ocean Surveyor 150kHz ADCP was run in both narrowband and broadband for various sections of the voyage. The RDI Ocean Surveyor 75kHz ADCP was run in narrowband for a section of the voyage. Both transducers were switched off during the port period on 19 October. Both transducers were switched off from 00:45 to 02:07 UTC on 9 October.

Transducer	Start		End	
	<i>Decimal Day</i>	<i>Date</i>	<i>Decimal Day</i>	<i>Date</i>
os75 narrowband	291.4718	19 October 2019	313.3708	10 November 2019
os150 narrowband	291.4718	19 October 2019	302.3440	31 October 2019
os150 broadband	293.0458	21 October 2019	349.9186	16 December 2019

Internal triggering was used.

The drop keel was at 4m extension (10.54m below centre of reference) for leg 1 and 1.19m extension (flush with gondola, 7.93m below centre of reference) for leg 2.

The bin sizes for the 150kHz ADCP were changed at various times throughout the voyage to obtain finer data granularity when the depth was shallow.

<i>Transducer</i>	<i>Configuration start (UTC)</i>	<i>Bin Count</i>	<i>Bin Size (m)</i>
Os75nb	2019-10-19 11:24:22	60	16
Os150nb	2019-10-19 11:24:23	60	8
	2019-10-21 01:10:56	60	4
Os150bb	2019-10-21 01:10:56	80	4
	2019-11-11 11:30:31	80	2
	2019-11-11 11:40:49	80	4
	2019-11-13 03:24:29	80	2

See the voyage computing and electronics report for more details regarding data acquisition.

## 2 Processing Background


The University of Hawaii's CODAS software dated 2019-10-01 was used for data post-processing.

## 3 Processing Notes


When processing the data, the true transducer offsets in metres from the GPS position of the ship of 75kHz dx=-1 dy=4 and 150kHz dx=-1 dy=1 were used.

## 4 Area Covered


**in2019\_v06 os75nb**

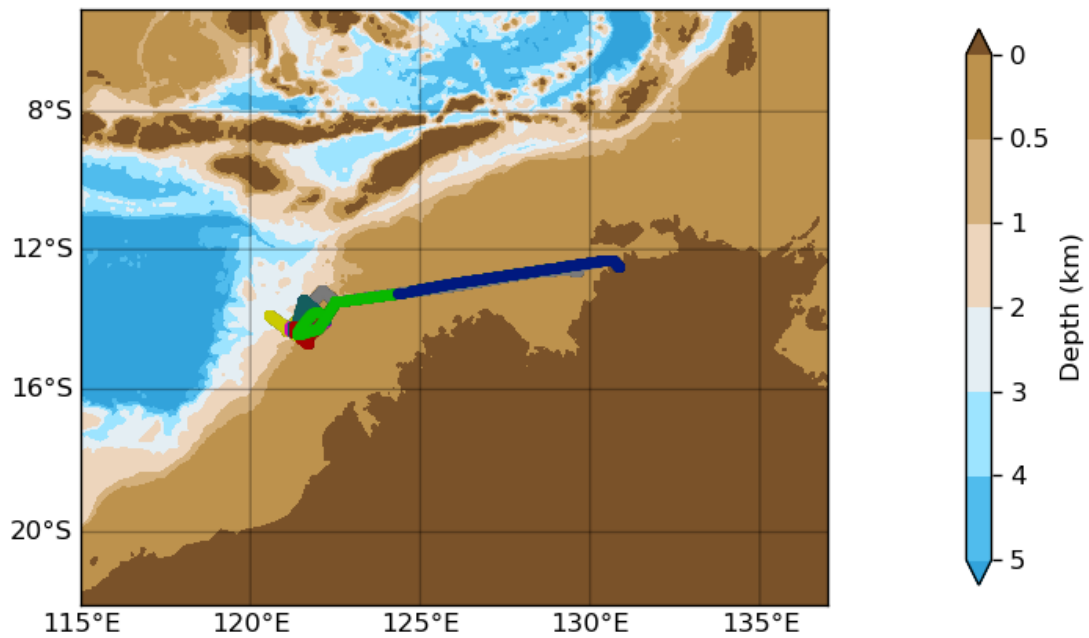

**in2019\_v06 os150nb**

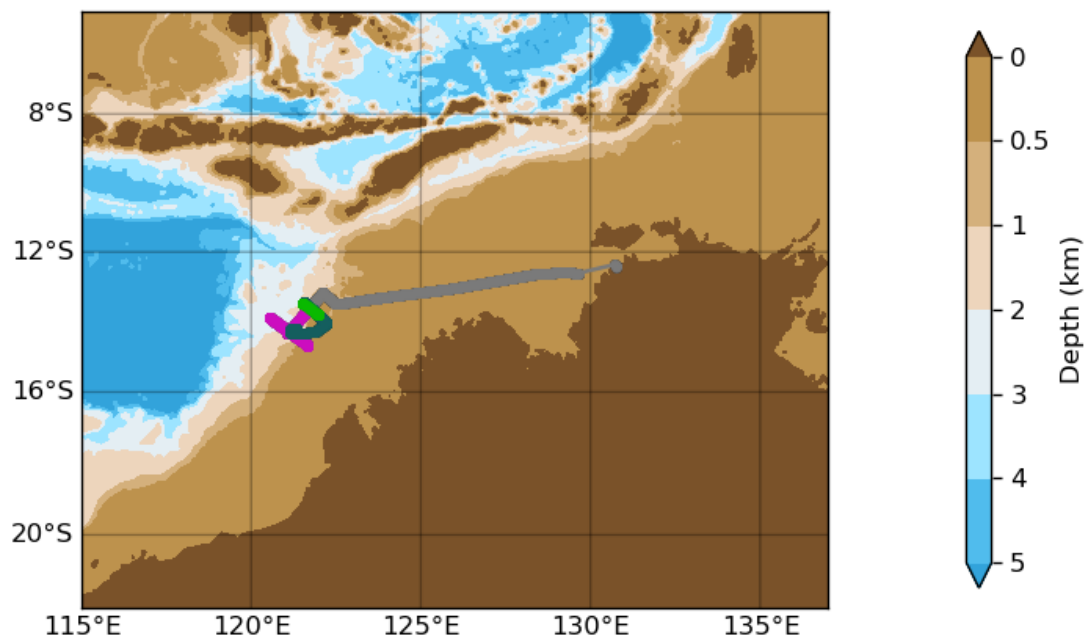

# in2019\_v06 os150bb

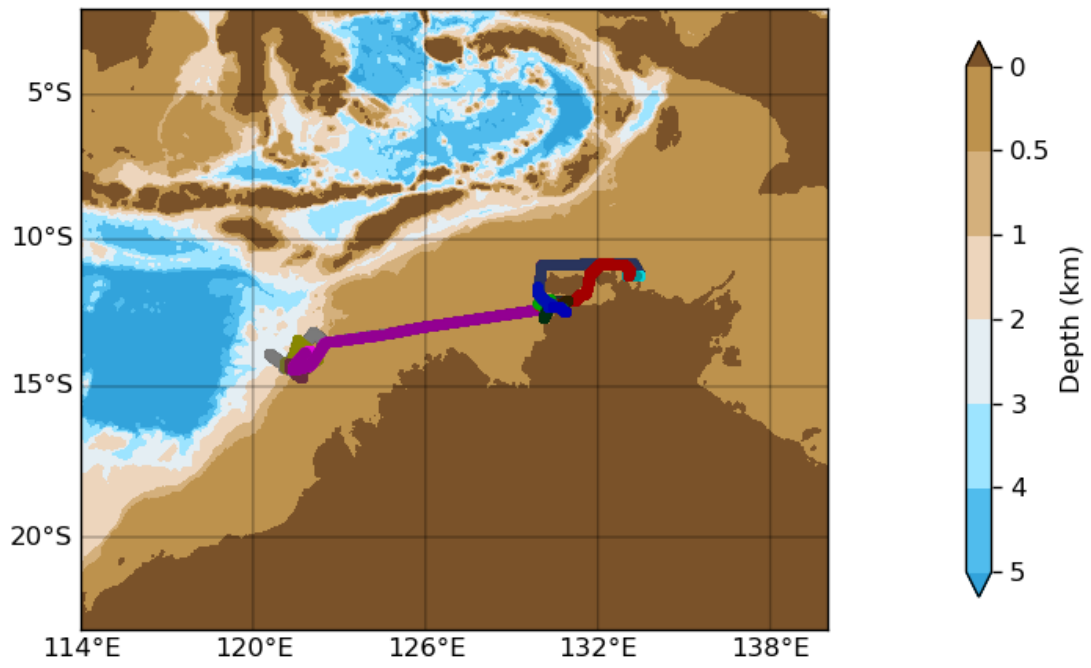

## 6 netCDF Data Headers

### 6.1 in2019\_v06\_os75nssb.nc

```
netcdf in2019_v06_os75nb {
dimensions:
    time = 6159 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2019-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 291.47525462963 ;
        time:data_max = 313.370474537037 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees_east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 120.5501 ;
        lon:data_max = 130.846369444444 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees_north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -14.6794055555556 ;
        lat:data_max = -12.2866055555556 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
        depth:units = "meter" ;
        depth:C_format = "%8.2f" ;
        depth:positive = "down" ;
        depth:data_min = 29.93f ;
        depth:data_max = 973.99f ;
    float u(time, depth_cell) ;
        u:missing_value = 1.e+38f ;
        u:long_name = "Zonal velocity component" ;
        u:units = "meter second-1" ;
        u:C_format = "%7.2f" ;
        u:data_min = -0.7220334f ;
        u:data_max = 0.6944f ;
    float v(time, depth_cell) ;
        v:missing_value = 1.e+38f ;
        v:long_name = "Meridional velocity component" ;
        v:units = "meter second-1" ;
        v:C_format = "%7.2f" ;
        v:data_min = -0.6234162f ;
        v:data_max = 0.4377126f ;
    short amp(time, depth_cell) ;
        amp:missing_value = 32767s ;
        amp:long_name = "Received signal strength" ;
        amp:C_format = "%d" ;
        amp:data_min = 11s ;
        amp:data_max = 218s ;
    byte pg(time, depth_cell) ;
        pg:missing_value = -1b ;
        pg:long_name = "Percent good pings" ;
        pg:C_format = "%d" ;
        pg:data_min = 0b ;
        pg:data_max = 100b ;
    byte pflag(time, depth_cell) ;
        pflag:long_name = "Editing flags" ;
        pflag:C_format = "%d" ;
        pflag:data_min = 0b ;
        pflag:data_max = 6b ;
    float heading(time) ;
        heading:missing_value = 1.e+38f ;
        heading:long_name = "Ship heading" ;
        heading:units = "degrees" ;
```

```

        heading:C_format = "%6.1f" ;
        heading:data_min = -179.9581f ;
        heading:data_max = 179.9664f ;
float tr_temp(time) ;
    tr_temp:missing_value = 1.e+38f ;
    tr_temp:long_name = "ADCP transducer temperature" ;
    tr_temp:units = "Celsius" ;
    tr_temp:C_format = "%4.1f" ;
    tr_temp:data_min = 28.5761f ;
    tr_temp:data_max = 31.80866f ;
short num_pings(time) ;
    num_pings:long_name = "Number of pings averaged per ensemble" ;
    num_pings:units = "None" ;
    num_pings:C_format = "%d" ;
    num_pings:data_min = 15s ;
    num_pings:data_max = 142s ;
float uship(time) ;
    uship:missing_value = 1.e+38f ;
    uship:long_name = "Ship zonal velocity component" ;
    uship:units = "meter second-1" ;
    uship:C_format = "%9.4f" ;
    uship:data_min = -6.341936f ;
    uship:data_max = 7.278512f ;
float vship(time) ;
    vship:missing_value = 1.e+38f ;
    vship:long_name = "Ship meridional velocity component" ;
    vship:units = "meter second-1" ;
    vship:C_format = "%9.4f" ;
    vship:data_min = -5.945114f ;
    vship:data_max = 5.883591f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2020-04-08 06:24:49 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "2993:bc42f2027bfe" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2019_v06 using instrument os75nb -
Short Version." ;
:cruise_id = "in2019_v06" ;
:sonar = "os75nb" ;
:yearbase = 2019 ;
:ship_name = "RV Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time          Time at the end of the ensemble, days from start of year.\n",
    "lon, lat      Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v          Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship  Zonal and meridional velocity components of the ship.\n",
    "heading       Mean ship heading during the ensemble.\n",
    "depth        Bin centers in nominal meters (no sound speed profile correction).\n",
    "tr_temp      ADCP transducer temperature.\n",
    "pg           Percent Good pings for u, v averaging after editing.\n",
    "pflag        Profile Flags based on editing, used to mask u, v.\n",
    "amp          Received signal strength in ADCP-specific units; no correction\n",
    "             for spreading or attenuation.\n",
    "=====\n",
    "\n",
    "" ;
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "=====\n",
    "\n",
    "Overview\n",
    "-----\n",
    "The CODAS database is a specialized storage format designed for\n",
    "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
    "averaged shipboard ADCP velocities and other variables, during the\n",
    "stages of data processing. The CODAS database stores velocity\n",
    "profiles relative to the ship as east and north components along with\n",
    "position, ship speed, heading, and other variables. The netCDF *short*\n",
    "form contains ocean velocities relative to earth, time, position,\n",
    "transducer temperature, and ship heading; these are designed to be\n",
    "\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
    "the entire CODAS database. Some variables are no longer used, and all\n",
    "have names derived from their original CODAS names, dating back to the\n",

```

```

"late 1980\'s.\n",
"\n",
"Post-processing\n",
"-----\n",
"CODAS post-processing, i.e. that which occurs after the single-ping\n",
"profiles have been vector-averaged and loaded into the CODAS database,\n",
"includes editing (using automated algorithms and manual tools),\n",
"rotation and scaling of the measured velocities, and application of a\n",
"time-varying heading correction. Additional algorithms developed more\n",
"recently include translation of the GPS positions to the transducer\n",
"location, and averaging of ship\'s speed over the times of valid pings\n",
"when Percent Good is reduced. Such post-processing is needed prior to\n",
"submission of \"processed ADCP data\" to JASADCP or other archives.\n",
"\n",
"Full CODAS processing\n",
"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"hull, the beam velocities are transformed to horizontal, vertical, and\n",
"\"error velocity\" components. Using a reliable heading (typically from\n",
"the ship\'s gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"    positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrk_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to (u+i*v)*(exp(i*theta)) where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrk_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",

```



```

"          = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrk_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value     bottom   Good      bin\n",
"-----+-----+-----+-----+\n",
"000          0\n",
"001          1                      bad\n",
"010          2                      bad\n",
"011          3                      bad\n",
"100          4          bad\n",
"101          5          bad                      bad\n",
"110          6          bad          bad\n",
"111          7          bad          bad          bad\n",
"-----+-----+-----+-----+\n",
"" ;

```

}

## 6.2 in2019\_v06\_os150nb.nc

```
netcdf in2019_v06_os150nb {
dimensions:
    time = 2998 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2019-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 291.475266203704 ;
        time:data_max = 302.3409375 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 120.550125 ;
        lon:data_max = 130.778308333333 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -14.6722277777778 ;
        lat:data_max = -12.3614527777778 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
        depth:units = "meter" ;
        depth:C_format = "%8.2f" ;
        depth:positive = "down" ;
        depth:data_min = 13.99f ;
        depth:data_max = 489.96f ;
    float u(time, depth_cell) ;
        u:missing_value = 1.e+38f ;
        u:long_name = "Zonal velocity component" ;
        u:units = "meter second-1" ;
        u:C_format = "%7.2f" ;
        u:data_min = -0.6287051f ;
        u:data_max = 0.7747493f ;
    float v(time, depth_cell) ;
        v:missing_value = 1.e+38f ;
        v:long_name = "Meridional velocity component" ;
        v:units = "meter second-1" ;
        v:C_format = "%7.2f" ;
        v:data_min = -0.6264351f ;
        v:data_max = 0.4635904f ;
    short amp(time, depth_cell) ;
        amp:missing_value = 32767s ;
        amp:long_name = "Received signal strength" ;
        amp:C_format = "%d" ;
        amp:data_min = 35s ;
        amp:data_max = 228s ;
    byte pg(time, depth_cell) ;
        pg:missing_value = -1b ;
        pg:long_name = "Percent good pings" ;
        pg:C_format = "%d" ;
        pg:data_min = 0b ;
        pg:data_max = 100b ;
    byte pflag(time, depth_cell) ;
        pflag:long_name = "Editing flags" ;
        pflag:C_format = "%d" ;
        pflag:data_min = 0b ;
        pflag:data_max = 6b ;
    float heading(time) ;
        heading:missing_value = 1.e+38f ;
        heading:long_name = "Ship heading" ;
        heading:units = "degrees" ;
        heading:C_format = "%6.1f" ;
        heading:data_min = -179.949f ;
        heading:data_max = 179.6616f ;
    float tr_temp(time) ;
        tr_temp:missing_value = 1.e+38f ;
        tr_temp:long_name = "ADCP transducer temperature" ;
        tr_temp:units = "Celsius" ;
        tr_temp:C_format = "%4.1f" ;
```

```

    tr_temp:data_min = 28.41114f ;
    tr_temp:data_max = 30.25682f ;
short num_pings(time) ;
    num_pings:long_name = "Number of pings averaged per ensemble" ;
    num_pings:units = "None" ;
    num_pings:C_format = "%d" ;
    num_pings:data_min = 27s ;
    num_pings:data_max = 137s ;
float uship(time) ;
    uship:missing_value = 1.e+38f ;
    uship:long_name = "Ship zonal velocity component" ;
    uship:units = "meter second-1" ;
    uship:C_format = "%9.4f" ;
    uship:data_min = -6.3399f ;
    uship:data_max = 6.109187f ;
float vship(time) ;
    vship:missing_value = 1.e+38f ;
    vship:long_name = "Ship meridional velocity component" ;
    vship:units = "meter second-1" ;
    vship:C_format = "%9.4f" ;
    vship:data_min = -4.928665f ;
    vship:data_max = 5.138676f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2020-04-08 02:17:53 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "2993:bc42f2027bfe" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2019_v06 using instrument os150nb -
Short Version." ;
:cruise_id = "in2019_v06" ;
:sonar = "os150nb" ;
:yearbase = 2019 ;
:ship_name = "RV Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time          Time at the end of the ensemble, days from start of year.\n",
    "lon, lat      Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v          Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship  Zonal and meridional velocity components of the ship.\n",
    "heading       Mean ship heading during the ensemble.\n",
    "depth        Bin centers in nominal meters (no sound speed profile correction).\n",
    "tr_temp      ADCP transducer temperature.\n",
    "pg           Percent Good pings for u, v averaging after editing.\n",
    "pflag        Profile Flags based on editing, used to mask u, v.\n",
    "amp          Received signal strength in ADCP-specific units; no correction\n",
    "              for spreading or attenuation.\n",
    "=====\n",
    "\n",
    "" ;
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "=====\n",
    "\n",
    "Overview\n",
    "-----\n",
    "The CODAS database is a specialized storage format designed for\n",
    "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
    "averaged shipboard ADCP velocities and other variables, during the\n",
    "stages of data processing. The CODAS database stores velocity\n",
    "profiles relative to the ship as east and north components along with\n",
    "position, ship speed, heading, and other variables. The netCDF *short*\n",
    "form contains ocean velocities relative to earth, time, position,\n",
    "transducer temperature, and ship heading; these are designed to be\n",
    "\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
    "the entire CODAS database. Some variables are no longer used, and all\n",
    "have names derived from their original CODAS names, dating back to the\n",
    "late 1980's.\n",
    "\n",
    "Post-processing\n",
    "-----\n",
    "CODAS post-processing, i.e. that which occurs after the single-ping\n",
    "profiles have been vector-averaged and loaded into the CODAS database,\n",
    "includes editing (using automated algorithms and manual tools),\n",
    "rotation and scaling of the measured velocities, and application of a

```

```

"time-varying heading correction. Additional algorithms developed more\n",
"recently include translation of the GPS positions to the transducer\n",
"location, and averaging of ship's speed over the times of valid pings\n",
"when Percent Good is reduced. Such post-processing is needed prior to\n",
"submission of \"processed ADCP data\" to JASADCP or other archives.\n",
"\n",
"Full CODAS processing\n",
"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"hull, the beam velocities are transformed to horizontal, vertical, and\n",
"error velocity components. Using a reliable heading (typically from\n",
"the ship's gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"    positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrk_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to (u+i*v)*(exp(i*theta)) where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrk_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrk_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",

```

```

"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value     bottom   Good      bin\n",
"-----+-----+-----+-----+\n",
"000          0\n",
"001          1                      bad\n",
"010          2                      bad\n",
"011          3                      bad\n",
"100          4          bad\n",
"101          5          bad                      bad\n",
"110          6          bad          bad\n",
"111          7          bad          bad          bad\n",
"-----+-----+-----+-----+\n",
"" ;

```

```

}
```

## 6.3 in2019\_v06\_os150bb.nc

```
netcdf in2019_v06_os150bb {
dimensions:
    time = 16048 ;
    depth_cell = 80 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2019-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 293.049259259259 ;
        time:data_max = 349.916319444444 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 120.550125 ;
        lon:data_max = 133.446891666667 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -14.679402777778 ;
        lat:data_max = -10.7969194444444 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
        depth:units = "meter" ;
        depth:C_format = "%8.2f" ;
        depth:positive = "down" ;
        depth:data_min = 12.22f ;
        depth:data_max = 330.29f ;
    float u(time, depth_cell) ;
        u:missing_value = 1.e+38f ;
        u:long_name = "Zonal velocity component" ;
        u:units = "meter second-1" ;
        u:C_format = "%7.2f" ;
        u:data_min = -1.904645f ;
        u:data_max = 1.887642f ;
    float v(time, depth_cell) ;
        v:missing_value = 1.e+38f ;
        v:long_name = "Meridional velocity component" ;
        v:units = "meter second-1" ;
        v:C_format = "%7.2f" ;
        v:data_min = -1.652436f ;
        v:data_max = 2.165833f ;
    short amp(time, depth_cell) ;
        amp:missing_value = 32767s ;
        amp:long_name = "Received signal strength" ;
        amp:C_format = "%d" ;
        amp:data_min = 21s ;
        amp:data_max = 226s ;
    byte pg(time, depth_cell) ;
        pg:missing_value = -1b ;
        pg:long_name = "Percent good pings" ;
        pg:C_format = "%d" ;
        pg:data_min = 0b ;
        pg:data_max = 100b ;
    byte pflag(time, depth_cell) ;
        pflag:long_name = "Editing flags" ;
        pflag:C_format = "%d" ;
        pflag:data_min = 0b ;
        pflag:data_max = 6b ;
    float heading(time) ;
        heading:missing_value = 1.e+38f ;
        heading:long_name = "Ship heading" ;
        heading:units = "degrees" ;
        heading:C_format = "%6.1f" ;
        heading:data_min = -179.9628f ;
        heading:data_max = 179.9556f ;
    float tr_temp(time) ;
        tr_temp:missing_value = 1.e+38f ;
        tr_temp:long_name = "ADCP transducer temperature" ;
        tr_temp:units = "Celsius" ;
        tr_temp:C_format = "%4.1f" ;
```

```

    tr_temp:data_min = 28.82417f ;
    tr_temp:data_max = 33.10022f ;
short num_pings(time) ;
    num_pings:long_name = "Number of pings averaged per ensemble" ;
    num_pings:units = "None" ;
    num_pings:C_format = "%d" ;
    num_pings:data_min = 29s ;
    num_pings:data_max = 274s ;
float uship(time) ;
    uship:missing_value = 1.e+38f ;
    uship:long_name = "Ship zonal velocity component" ;
    uship:units = "meter second-1" ;
    uship:C_format = "%9.4f" ;
    uship:data_min = -6.051019f ;
    uship:data_max = 7.288956f ;
float vship(time) ;
    vship:missing_value = 1.e+38f ;
    vship:long_name = "Ship meridional velocity component" ;
    vship:units = "meter second-1" ;
    vship:C_format = "%9.4f" ;
    vship:data_min = -5.942012f ;
    vship:data_max = 6.669464f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2020-04-08 02:58:42 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "2993:bc42f2027bfe" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2019_v06 using instrument os150bb -
Short Version." ;
:cruise_id = "in2019_v06" ;
:sonar = "os150bb" ;
:yearbase = 2019 ;
:ship_name = "RV Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time          Time at the end of the ensemble, days from start of year.\n",
    "lon, lat      Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v           Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship  Zonal and meridional velocity components of the ship.\n",
    "heading       Mean ship heading during the ensemble.\n",
    "depth         Bin centers in nominal meters (no sound speed profile correction).\n",
    "tr_temp       ADCP transducer temperature.\n",
    "pg           Percent Good pings for u, v averaging after editing.\n",
    "pflag        Profile Flags based on editing, used to mask u, v.\n",
    "amp          Received signal strength in ADCP-specific units; no correction\n",
    "              for spreading or attenuation.\n",
    "=====\n",
    "\n",
    "" ;
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "=====\n",
    "\n",
    "Overview\n",
    "-----\n",
    "The CODAS database is a specialized storage format designed for\n",
    "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
    "averaged shipboard ADCP velocities and other variables, during the\n",
    "stages of data processing. The CODAS database stores velocity\n",
    "profiles relative to the ship as east and north components along with\n",
    "position, ship speed, heading, and other variables. The netCDF *short*\n",
    "form contains ocean velocities relative to earth, time, position,\n",
    "transducer temperature, and ship heading; these are designed to be\n",
    "\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
    "the entire CODAS database. Some variables are no longer used, and all\n",
    "have names derived from their original CODAS names, dating back to the\n",
    "late 1980's.\n",
    "\n",
    "Post-processing\n",
    "-----\n",
    "CODAS post-processing, i.e. that which occurs after the single-ping\n",
    "profiles have been vector-averaged and loaded into the CODAS database,\n",
    "includes editing (using automated algorithms and manual tools),\n",
    "rotation and scaling of the measured velocities, and application of a

```

```

"time-varying heading correction. Additional algorithms developed more\n",
"recently include translation of the GPS positions to the transducer\n",
"location, and averaging of ship's speed over the times of valid pings\n",
"when Percent Good is reduced. Such post-processing is needed prior to\n",
"submission of \"processed ADCP data\" to JASADCP or other archives.\n",
"\n",
"Full CODAS processing\n",
"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"hull, the beam velocities are transformed to horizontal, vertical, and\n",
"error velocity components. Using a reliable heading (typically from\n",
"the ship's gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"    positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrk_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to (u+i*v)*(exp(i*theta)) where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrk_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrk_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",

```



```

"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value     bottom   Good      bin\n",
"-----+-----+-----+-----+\n",
"000          0\n",
"001          1                      bad\n",
"010          2                      bad\n",
"011          3                      bad\n",
"100          4          bad\n",
"101          5          bad                      bad\n",
"110          6          bad          bad\n",
"111          7          bad          bad          bad\n",
"-----+-----+-----+-----+\n",
"" ;

```

}