

---

## SS 9/2005

16:00 21-Oct-2005 Fremantle - 09:00 12-November-2005 Fremantle

*(Local times)*

*Data processing completed by*  
**Bernadette Heaney, January 2006**

### 1. Summary

These notes relate to the production of quality controlled (QC-ed), position, depth and meteorological and thermosalinograph data from RV Southern Surveyor voyage 9/2005.

Position data was acquired using the Seapath 200 position and motion reference unit. Depth data was acquired with the Simrad EA500. The Divisional Data Librarian can assist with information regarding all other sensors.

### 2. Voyage details

“Nature and origin of the Naturaliste Plateau and Diamantina Zone: a key to understanding the assembly and breakup history of eastern Gondwana”


#### 2.1 Principal Investigator

Professor Anthony J Crawford

University of Hobart

## Processing Notes

---

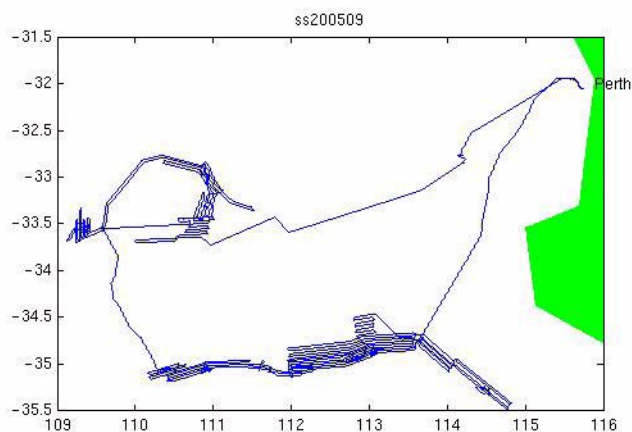

### 3. Processing Notes

#### 3.1 Background Information

A combined underway file for the entire voyage, consisting of 10 second values of position, depth, meteorological and thermosalinograph variables was remade on 16 Dec 2005 - by reading data from hourly files returned from the voyage and modified. (Time range 21-Oct-2005 08:05:40 - 12-Nov-2005 01:59:00).

The water depth was “repicked” using echoview software. The depth data was interpolated to 10 second values. The new depths were read back into the netcdf file. The processor noted an offset in the ea500 time and the unix time (up to 30 seconds) - all depth data was flagged as “good, none, timing”.

The meteorological data consists of air temperature, humidity, light, atmospheric pressure, wind speed and direction and maximum wind gust.

## Processing Notes

---

The thermosalinograph (TSG) data consists of water temperature and water salinity. The thermosalinograph salinity data is calibrated against CTD data (Sea Bird conductivity, temperature and depth sensor) by running the water from the thermosalinograph through the CTD in the wetlab. Data from the CTD is recorded for about 30 minutes; data from the TSG is continuously logged while at sea. The CTD conductivity data was calibrated with values derived from bottle data on ss 7/2005. The TSG data was then compared to the processed CTD data.

A scale (0.9999) and offset (.000016) was applied to the TSG conductivity data and the salinity data was re-computed.

The gps data from the Seapath MRU unit gave no problems.

### 4. Other

The navigation, depth, meteorological and thermosalinograph data will be entered into the data warehouse. Position, depth and meteorological and thermosalinograph data extracted from the underway file is available online.

### 5. References

Pender, L., 2000: Data Quality Control Flags. [http://www.csiro.marine.au/datacentre/ext\\_docs/DataQualityControlFlags.pdf](http://www.csiro.marine.au/datacentre/ext_docs/DataQualityControlFlags.pdf)

Bernadette Heaney

CSIRO Marine Research

Hobart, Tas, Australia