

## *RV Investigator*

### Underway Data Processing Summary Report

<b>Voyage #:</b>	<b>IN2021_T01</b>
<b>Voyage title:</b>	<b>Transit: Brisbane to Darwin</b>
<b>Depart:</b>	Brisbane QLD, 18:00 AEST Wednesday 9 <sup>th</sup> June 2021
<b>Return:</b>	Darwin NT, 12:00 ACST Wednesday 23 <sup>rd</sup> June 2021
<b>Data dates:</b>	10-June-2021 08:22:05 to: 23-June-2021 01:41:00 UTC
<b>Chief Scientist:</b>	Dr Viena Puigcorbé, Edith Cowan University (supporting remotely from onshore)
<b>Data processed by:</b>	Vito Dirita (CSIRO)
<b>Publication Date:</b>	04 November 2021




## 1.1 Table of Contents

1.1 Table of Contents .....	2
1.2 Summary.....	3
1.3 Voyage Track.....	3
1.4 Underway Data .....	3
1.5 Completeness and Data Quality.....	4
1.6 Processing Comments .....	4
1.7 Final Underway Data .....	8
1.8 Final Dataset Files .....	9
1.9 References .....	9
1.10 APPENDIX:.....	10

## 1.2 Summary

The primary objective of voyage IN2021\_T01 was movement of RV Investigator from Brisbane to Darwin in preparation for IN2021\_V04. The major Supplementary Project was: *Microplastics in the food chain: impact on the microbial and planktonic organisms* utilised CTD casts and Hydro-Bios tows. The Piggyback Project was: *Linking the Biological Carbon Pump flux to microbial colonisation of sinking particles in the Coral Sea* also utilised three CTD stations before passing through the Torres Strait. This transit also conducted Cosmic ray measurements, ARGO float deployments and opportunistic mapping of areas including a part of the West Cape York marine park.

## 1.3 Voyage Track

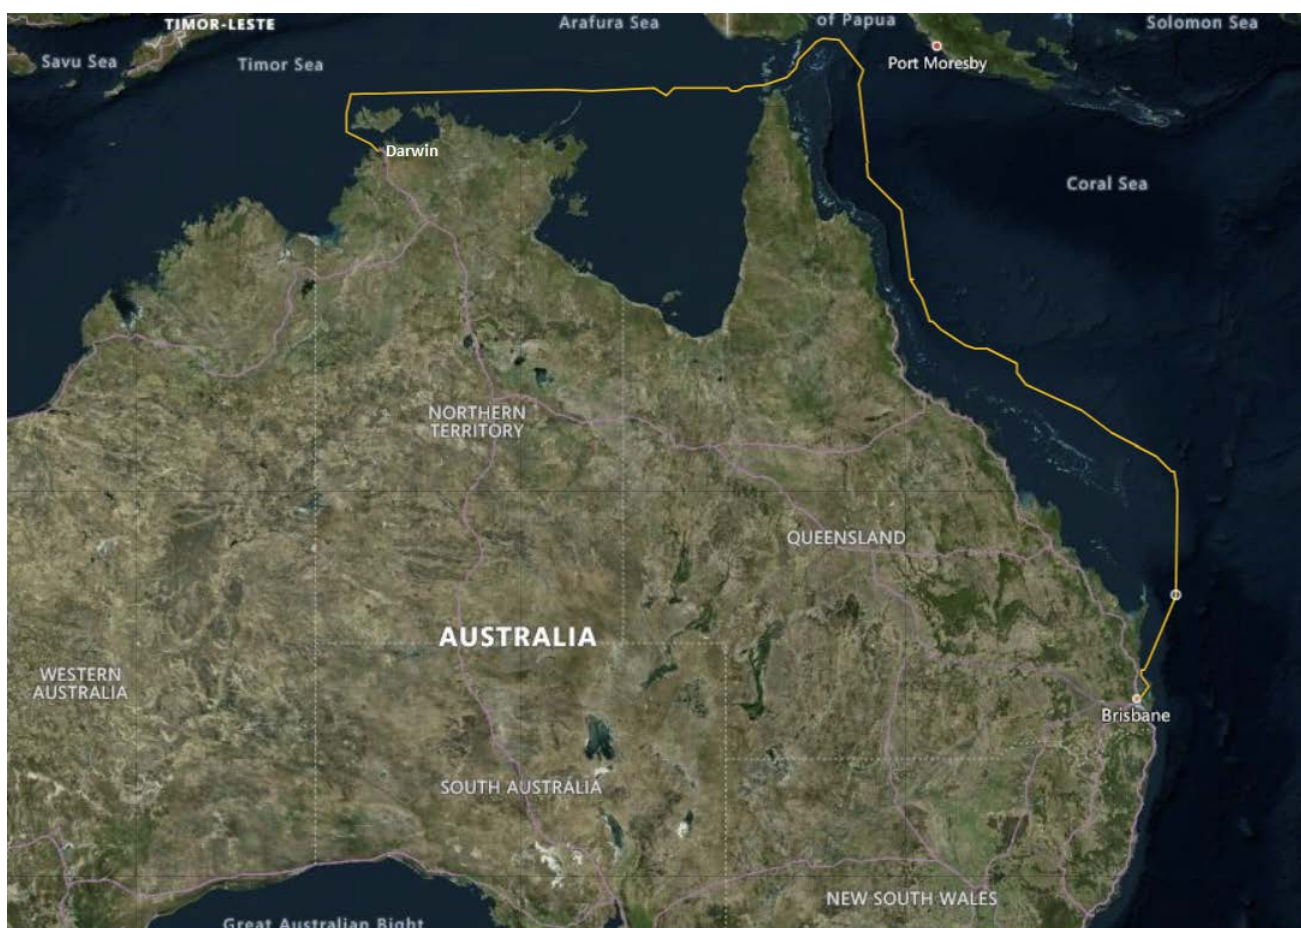

## 1.4 Underway Data

Navigation data is acquired using the Seapath 330 plus position and reference unit, which is also differentially corrected by data from the FUGRO marine cstar 3610 receiver.

The Meteorological data consists of two port/starboard relative humidity and temperature sensors, vane type wind sensor, licor light sensor and barometric air pressure.

Data from the Integrated Marine Observing System sensors (IMOS) are also included. The sensors are port and starboard radiometers and pyranometers, ultrasonic wind speed and direction.

Refer to the Electronics report for this voyage for instruments used and their serial numbers.

Navigation, meteorological, IMOS and TSG data are preliminary quality controlled by combining all data from hourly recorded files to 5 second values in a netCDF formatted file. The combined data is referred to as: “underway data”.

A combined file was made on 5<sup>th</sup> July 2021 by running the Java application UWYMerger (V1.8.1) with data time range of: 10-June-2021 08:22:05 to 23-Jun-2021 01:41:00 (UTC), Techsas2 was used as the data source.

Further, it should be noted that the merged data file contains additional underway instrument sensor data that are not quality controlled or processed and is provided for completeness only. This includes data from the air sampling instruments (i.e. two Ozone sensors, Absorption Photometer, Picarro and sampling inlet bearing), pCO<sub>2</sub>, Drop keel position, depth and gyro.

For further description of instruments, their mounted locations and Underway netCDF variables please refer to the Appendix at the end of this report.

## 1.5 Completeness and Data Quality

Navigation data (latitude and longitude, speed over ground, ship heading and course over ground); meteorological data (port and starboard for each of air temperature, relative humidity, relative and true wind speed and direction, PAR light, rain and atmospheric pressure) and IMOS data (port and starboard radiometers and pyranometers, ultrasonic relative wind direction and speed), thermosalinograph (salinity and water temperature) data were evaluated and quality controlled. It should be noted that the underway netCDF file contains the raw unQC'd data. Therefore even though the QC'd variable may have been NaN'ed or otherwise adjusted or filtered, the raw data variable is always available in the netCDF underway file. This is useful if the end user wishes to apply a different QCing or filtering methodology.

## 1.6 Processing Comments

**Atmospheric Pressure:** No issues found with the barometric sensor. The foremast digital barometer was used.

**Air Temperature:** A number of minor discrepancies between the port and starboard air temperature sensors were noted, otherwise both sensors gave very close readings. These discrepancies usually occur during periods of rapid temperature change. This phenomenon has probably come about due to the rapid warming of the ship's metal structure and air due to the ship becoming stationary or cooling of the air temperature due to the ship speeding off from stationary or due to the evaporation of rain water around the sensor housing. Furthermore, they also seem to relate to when the ship is stationary with little wind or during/following periods of rainfall or as the result of a change in the ship speed that could be the result of hot exhaust gases being blown over the sensors depending on the wind direction.

**Latitude/Longitude:** No issues found with the latitude and longitude data.

**Humidity:** No issues found with the humidity sensors.

**Rain:** On several occasions, the rain gauge failed to reset to zero on their hourly timer, this value however is well below the accuracy of the instruments ( $\pm 1$  mm).

**Wind Speed:** It has been observed that due to the location of the port wind sensor relative to the ship's superstructure, the instrument could experience some interference when the wind direction is approximately from the starboard stern side which would result in greater fluctuations in both speed and direction measurements.

Likewise, the starboard wind speed and direction sensor could experience similar interference when the wind direction is approximately from the portside stern. No major issues were found with the wind speed sensors, only a small flatlined region (15<sup>th</sup> June 2021 14:35 – 15:02 UTC) was found with the port wind speed sensor which was subsequently flagged as BAD and NaN'ed.

**Wind Direction:** An automated filter was implemented to remove data spikes and applied to both the port and starboard (true and relative) wind direction. The filter was applied only in a few selected regions which appeared to be very noisy or spiky. The majority of the spikes appeared to have been correctly flagged and removed. However with automated filtering it is possible that a very small percentage of data points may have been misidentified. The filter removes data points when spikes are detected to be more than 80 degrees from the moving average.

**CourseOG:** Position and velocity (speedOG) are measured by differential GNSS using phase-smoothed pseudo-range and Doppler observations. When using high precision differential corrections a world wide accuracy of 10 -20 cm is possible.

Course Over Ground (COG) describes the direction of motion with respect to the ground that a vessel has moved relative to geographic north pole. Accordingly, should a vessel be stationary, it is not travelling a course (e.g., at the wharf).

Under conditions where a vessel is experiencing leeway (wind, current), a vessel's heading and COG may differ. This difference will typically be largest for vessels moving at slow speeds. When the ship speed is less than 0.5 knots (25.7 cm/s) course over ground values are seen to fluctuate and are highly variable. Course and speed overground were recomputed from 5 second latitude and longitude values (truncated to 7 decimal places, .000001 degree = 11.112 cm).

The resulting course overground values were compared to the original GPS derived values and agreed well, (i.e. a slight smoothing was achieved when the ship was underway and when the ship was almost stationary the result was similarly variable). The course overground data for this voyage has not been filtered and has been flagged as good.

**speedOG:** No issues found with the speedOG.

**shipHeading:** No issues found with the shipHeading.

**PAR:** No major issues were found with the port and starboard PAR sensors, however some sections were marked as suspect for both the port and starboard PAR.

**Pyranometer:** No major issues were found with the port and starboard pyranometer sensors, however a few data points were marked as suspect for both the port and starboard pyranometer

**Radiometer:** No issues found with the Radiometer data.

**Ultrasonic Wind Speed:** No issues were found with the ultrasonic wind speed sensor. An automated filter was used which flags second-difference spikes greater than 12 knots (suspect) and second-difference spikes greater than 18 knots flagged as bad (NaN'ed).

**Ultrasonic Wind Direction:** The relative wind direction values for the ultrasonic wind sensor showed unusual characteristics. This was investigated and it appears that when the wind, more or less, is on the stern of the ship the ultrasonic wind direction values exhibit wild variations (i.e. large spikes) which are not manifested by the two vane type wind sensors to the same extent. It is our belief that this characteristic is most likely caused by the interaction of the ships superstructure/foremast/ship motion and the wind in relation to the ultrasonic wind sensor. Spikes greater than 80 degrees from the moving average were NaN'ed and flagged as bad.

**Water Temperature:** Several small sections of water temperature are missing (approximately 200 points).

**Salinity:** There is no salinity data for the first 18.3 hours of the voyage (10-Jun-2021 08:22:05 to 11-Jun-2021 02:51:10) due to the long Brisbane pilotage in which the seawater pumps were turned off to prevent sediment intake into the TSG. An interesting feature was noted on the salinity plot in which a zig-zag trajectory course (latitude-longitude) conducted by the ship resulted in a sawtooth or triangular salinity pattern (18<sup>th</sup> June 2021 13:42:10 to 19<sup>th</sup> June 2021 05:49:55).

**TSG Calibration:** During the course of the voyage, bottle salinity samples were collected from the underway seawater supply at regular (every few days) intervals, and the precise time of the sample was recorded. A total of 18 samples were collected and analyzed. These values were compared with the underway salinity measured by the TSG at the same precise date and time which was used to calculate a scaling coefficient for the TSG using Multiple Linear Regression. This resulted in a scale coefficient of 0.999798. The residual had a standard deviation (S.D) of 0.0021638 PSU better than the required 0.01 PSU. This was then applied to the salinity data and its QC flag set to {'good', 'manually adjusted', 'no error', salinityQC values of 48}. Salinity bottle calibration data can be found in the following file: *in2021\_t01\_TSGCal\_BottleResults.csv*.

**TSG Lag:** Examination and comparison of the TSG water temperature profile against the sea surface water temperature showed a lag of approximately about 2.08 minutes between the two data sets and a mean thermal increase of +0.173C° from the intake keel to the TSG. This lag is due to the time taken for the water to travel from the water intake on the port drop keel (where sea surface water temperature is measured) to the TSG located in the underway sea water lab on the ship (where the TSG sensor temperature and the conductivity is measured). When the precise location for the TSG salinity measurement is critical, this lag would need to be taken into account in order to determine the exact geolocation of the sampled value. For example, assuming a ship cruising speed of 10 knots and a lag of 2.08 minutes, the salinity measurements could be for a location about 643 meters away from the current ship location. Please note that the TSG and SBE38 SST intakes are located on the port drop keel, the intake depths are described in the Appendix [Table 3](#).

**Depth:** Finally, the Depth data is no longer processed as part of the underway data set. The non QC'd data is available in the underway data. The QC'd depth data could be obtained from processed GSM dataset (centre beam) for this voyage.

### Other Data Sets:

It should be noted that the underway netCDF file contains the raw unQC'ed data. Therefore even though the QC'd variable may have been NaN'ed or otherwise adjusted or filtered, the raw data variable is always available in the netCDF underway file. This is useful if the end user wishes to apply a different QCing or filtering methodology.

### Comparing Port and Starboard Sensors:

The following table compares the mean-absolute-difference and max-absolute-differences between port and starboard sensor outputs prior to and after QCing has been applied. Please note that the **After QC:** column only accounts for values which are flagged as good.

Sensor:	Before QC		After QC:		Units:
	mean(abs(diff))	max(abs(diff))	mean(abs(diff))	max(abs(diff))	
Air Temp	0.09	0.77	0.09	0.77	Degree Celsius
Humidity	0.49	3.61	0.49	3.61	%RH
relWindSpeed	2.19	20.07	2.19	18.91	knot
trueWindSpeed	2.04	20.11	2.04	18.19	knot
relWindDir	6.78	179.14	6.67	179.14	Degree
trueWindDir	6.38	176.86	6.36	164.85	Degree
PAR	22.31	1224	20.48	1224	$\mu E/m^2/s$
Pyranometer	6.33	693.5	5.06	563.6	$W/m^2$
Radiometer	2.26	19.6	2.27	19.6	$W/m^2$
Rain	0.01	1.75	0.01	1.75	mm

### Commonly Used QC Flags:

The datasets include quality control (QC) flags which are described in more detail in the references provided, normally however only a small subset is used, below are the most commonly used qc flags. Please note that on some systems and file formats, eg. netCDF, it is not possible to store unsigned byte values. In this case, flags greater than 127 are stored as negative numbers. To convert them to unsigned integers, simply add 256.

QC Flags Description					
Signed	Unsigned	Description	Data State	Operation Type	Error Type
-123	133	Bad (data is NaN'ed)	Bad	None	Error Flagged by processor
0	0	Good	Good	None	No error, data is good
-187	69	Suspect (data	Suspect	None	Error flagged by processor
-135	121	Operator adjusted	Suspect	Manually adjusted	Data out of range
-115	141	Data missing	Bad	None	No data, missing for unknown reason
-53	203	not QC'd	No QC	None	Preliminary processing (calibration) only
-199	57	Operator adjusted	Good	Manually Adjusted	Data out of range
-208	48	Re-calibrated	Good	Manually Adjusted	None

## 1.7 Final Underway Data:

The navigation, meteorological and thermosalinograph data will be entered into the O&A divisional data warehouse. All data timestamps are in UTC.

Final Underway (csv) QC'd Data:						
	Parameter Name:	parameterQC:	% Good	% Suspect	% Bad	% Missing
1	latitude	latitudeQC	100	0	0	0
2	longitude	longitudeQC	100	0	0	0
3	speedOG	speedOGQC	100	0	0	0
4	courseOG	courseOGQC	100	0	0	0
5	shipHeading	shipHeadingQC	100	0	0	0
6	portAirTemp	portAirTempQC	100	0	0	0
7	stbdAirTemp	stbdAirTempQC	100	0	0	0
8	portHumidity	portHumidityQC	100	0	0	0
9	stbdHumidity:	stbdHumidityQC	100	0	0	0
10	atmPressure:	atmPressureQC	100	0	0	0
11	portRelWindDir	portRelWindDirQC	99.94	0.02	0.04	0
12	stbdRelWindDir	stbdRelWindDirQC	99.92	0.05	0.04	0
13	portTrueWindDir	portTrueWindDirQC	99.99	0	0.01	0
14	stbdTrueWindDir	stbdTrueWindDirQC	99.98	0	0.01	0
15	portRelWindSpeed	portRelWindSpeedQC	99.85	0	0.15	0
16	stbdRelWindSpeed	stbdRelWindSpeedQC	100	0	0	0
17	portTrueWindSpeed	portTrueWindSpeedQC	99.85	0	0.14	0
18	stbdTrueWindSpeed	stbdTrueWindSpeedQC	100	0	0	0
19	maxWindGust	maxWindGustQC	100	0	0	0
20	portRain	portRainQC	100	0	0	0
21	stbdRain	stbdRainQC	100	0	0	0
22	portPAR	portPARQC	99.8	0.2	0	0
23	stbdPAR	stbdPARQC	99.81	0.19	0	0
24	portPyranometer	portPyranometerQC	99.9	0.1	0	0
25	stbdPyranometer	stbdPyranometerQC	99.7	0.29	0	0
26	portRadiometer	portRadiometerQC	100	0	0	0
27	stbdRadiometer	stbdRadiometerQC	100	0	0	0
28	ultrasonicRelWindSpeed	ultrasonicRelWindSpeedQC	100	0	0	0
29	ultrasonicTrueWindSpeed	ultrasonicTrueWindSpeedQC	100	0	0	0
30	ultrasonicRelWindDir	ultrasonicRelWindDirQC	99.27	0.12	0.61	0
31	ultrasonicTrueWindDir	ultrasonicTrueWindDirQC	99.94	0	0.06	0
32	salinity	salinityQC	92.3	0	6.23	1.46
33	waterTemp	waterTempQC	99.91	0	0	0.09



## 1.8 Final Dataset Files

The final datasets for publication and distribution:

Final Dataset Files	
<b>IN2021_T01uwy5sec.csv</b>	5 second resolution csv format dataset of of QC'd parameters
<b>IN2021_T01uwy10sec.csv</b>	10 second resolution csv format (interpolated) dataset of QC'd parameters
<b>IN2021_T01uwy1min.csv</b>	1 minute resolution csv format (interpolated) dataset of QC'd parameters
<b>IN2021_T01uwy5min.csv</b>	5 minute resolution csv format (interpolated) dataset of QC'd parameters
<b>IN2021_T01uwy.nc</b>	5 second resolution netcdf format full dataset including unQC'd data

## 1.9 References

Subversion repository version of DPG Matlab generic tools 3974

Pender, L., 2000. Data Quality Control flags.

[http://www.marine.csiro.au/datacentre/ext\\_docs/DataQualityControlFlags.pdf](http://www.marine.csiro.au/datacentre/ext_docs/DataQualityControlFlags.pdf)

Atmospheric sensors:

[\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Met Station\Documentation\Met Instrument Location Survey\Radialshots\\_Weathersensors\\_Rev4.pdf](\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Met Station\Documentation\Met Instrument Location Survey\Radialshots_Weathersensors_Rev4.pdf)

## 1.10 APPENDIX:

**TABLE-1: Underway Sensors**

The table below contains the description of Ship sensors and Underway netCDF variables.

Underway Data Instrument and Identifier	Sensor Description	Position	netCDF variable	QC	Variable Description	Variable units
<b>Navigation Instruments:</b>						
Seapath 330+ with Seatex MRU 5+ and FUGRO Seastar 3610 DGNSS receiver	DGPS system providing position, attitude, velocity, acceleration and timing information.	Monkey Island & Bridge equipment room				
			Longitude	yes	Longitude	Degree East
			Latitude	yes	Latitude	Degree North
			speedOG	yes	Ship speed over ground	Knot
			courseOG	yes	Ship course over ground	Degree
			shipHeading	yes	Heading of the ship	Degree
			alt	no	Altitude re: mean sea level (geoid)	Metres
Northrup Grumman Sperry 4914-CA Navigat X MK1	Gyrocompass	Bridge				
			gyroHeading	No	Gyro Heading	Degree
Kongsberg Maritime Skipper DL850	3 Axis doppler log - measuring vessel speed through water	Gondola	(no data)			
			longitudinalWaterSpeed	No	Longitudinal water speed	knot
			transverseWaterSpeed	No	Transversal water speed	knot
			longitudinalGroundSpeed	No	Longitudinal ground speed	knot
			transverseGroundSpeed	No	Transversal ground speed	knot
			lockOnWater	No	Lock on water flag	n/a
			lockonGround	No	Lock on ground flag	n/a
<b>Sea Water Instruments:</b>						
Sea-Bird-SBE 21 TSG	Thermosalinograph (TSG)	CTD Space				
			salinity	Yes	Measures sea surface salinity	Practical Salinity Units (PSU)
			tsgSensorTemp	No	Water temperature measurement in the TSG canister	Degree Celsius (degC)
Burkert 8045	Flow meter	CTD space				
			tsgFlow	No	Flow rate of sea water through the TSG	l/min
Burkert 8045	Flow meter	Underway Seawater Lab				
			labMainFlow	No	Underway lab main seawater flow rate	l/min
Kobold MIK-C	Flow meter	Underway Seawater Lab				
			labBranchFlow	No	Underway lab branch seawater flow rate	l/min
Sea-Bird - SBE 38	Remote Temperature Probe	Port Drop Keel				

			waterTemp	Yes	Sea surface water temperature measurement	Degree Celsius (degC)
Wet Labs Wetstar Fluorometer	Fluorometer	Underway Seawater Lab				
			fluorescence	No	Measures active phytoplankton biomass and chlorophyll concentrations	Percentage of the full scale voltage
CSIRO Hobart pCO2	Underway pCO <sub>2</sub> system measuring surface water CO <sub>2</sub> mole fraction	Underway Seawater Lab				
			equTemp	No	Equilibrator water temperature	Degree Celsius (degC)
			XCO2	No	XCO2	ppm
			waterVapour	No	Water vapour	mmol/mole
			licorPressure	No	Licor pressure	hPa
			equPressure	No	Equilibrator pressure	hPa
			waterFlow	No	Water flow	l/min
			licorFlow	No	Licor flow	ml/min
			ventFlow	No	Vent Flow	ml/min
			condTemp	No	Condenser Temperature	Degree Celsius (degC)
			pumpSpeed	No	CO2 Pump Speed	l/min
Aanderaa Oxygen Optode 3835	Oxygen Sensor	Underway Seawater Lab				
			do		oxygen	uM
			doSaturation		Air saturation	Percentage (%)
			optodeWaterTemp		Optode water temperature	Degrees Celsius (degC)
CSIRO Drop keel sensor	Measuring drop keel draft	Port & starboard				
			portKeelExtension		Port drop keel extension	meters
			starboardKeelExtension		Starboard drop keel extension	meters
<b>Met Instruments:</b>						
Rotronic T&RH HC2A-S3	Temperature and Humidity Sensor	Foremast (Starboard)				
			stbdAirTemp	Yes	Starboard air temperature measurement	Degree Celsius (degC)
			stbdHumidity	Yes	Starboard humidity measurement	Percentage (%)
			stbdDewPoint	Yes	Starboard Dew Point	Degree Celsius (degC)
Rotronic T&RH HC2A-S3	Temperature and Humidity Sensor	Foremast (Port)				
			portAirTemp	Yes	Port air temperature measurement	Degree Celsius (degC)
			portHumidity	Yes	Port humidity measurement	Percentage (%)
			portDewPoint	Yes	Port Dew Point	Degree Celsius (degC)
Vaisala Ship's Barometer PTB330	Atmospheric pressure	Bridge Wing	atmPressureBridge	Yes	Atmospheric pressure measurement	Millibar (mbar)
Vaisala Ship's Barometer PTB330	Atmospheric pressure	Foremast	atmPressure	Yes	Atmospheric pressure measurement	Millibar (mbar)

RM Young Wind Sensor Type 05107	Vane type wind sensor	Foremast (Port)				
			portRelWindSpeed	Yes	Wind speed relative to the ship	knot
			portRelWindDir	Yes	Wind direction relative to the ship	Degree
			portTrueWindSpeed	Yes	True wind speed, corrected for ship speed	knot
			portTrueWindDir	Yes	True wind direction, corrected for ship heading	Degree
			maxWindGust	Yes	True maximum wind gust corrected for ship speed	knot
RM Young Wind Sensor Type 05108	Vane type wind sensor	Foremast (Starboard)				
			stbdRelWindSpeed	Yes	Wind speed relative to the ship	knot
			stbdRelWindDir	Yes	Wind direction relative to the ship	Degree
			stbdTrueWindSpeed	Yes	True wind speed, corrected for ship speed	knot
			stbdTrueWindDir	Yes	True wind direction, corrected for ship heading	Degree
Gill WindObserver II	Ultrasonic Wind Sensor	Foremast (Port)				
			ultrasonicRelWindSpeed	Yes	Wind speed relative to the ship	knot
			ultrasonicRelWindDir	Yes	Wind direction relative to the ship	Degree
			ultrasonicTrueWindSpeed	Yes	True wind speed, corrected for ship speed and direction	knot
			ultrasonicTrueWindDir	Yes	True wind direction, corrected for ship speed and heading	Degree
RM Young Rain Gauge type 50202	Syphoning Rain Sensor	Foremast				
			portRain	Yes	Accumulated hourly rain	mm
			stbdRain	Yes	Accumulated hourly rain	mm
Eppley PIR	Precision Infrared Radiometer	Monkey Island (Starboard)				
			stbdRadiometer	Yes	Measure radiation in the band 4-100 micron, longwave radiation	W/m <sup>2</sup>
Eppley PIR	Precision Infrared Radiometer	Monkey Island (Port)				
			portRadiometer	Yes	Measure radiation in the band 4-100 micron, longwave radiation	W/m <sup>2</sup>
Eppley PSP	Precision Spectral Pyranometer	Monkey Island (Starboard)				
			stbdPyranometer	Yes	Measure radiation in the band 0.2 - 4 micron, shortwave radiation	W/m <sup>2</sup>
Eppley PSP	Precision Infrared Radiometer	Monkey Island (Port)				
			portPyranometer	Yes	Measure radiation in the band 0.2 - 4 micron, shortwave radiation.	W/m <sup>2</sup>

LI-COR LI-190 Quantum Sensor	Photosynthetically Active Radiation	Monkey Island (Starboard)				
			stbdPAR	Yes	measures radiation in the photosynthetically active region of 0.4-0.7 micron	uE/m^2/s
LI-COR LI-190 Quantum Sensor	Photosynthetically Active Radiation	Monkey Island (Port)				
			portPAR	Yes	measures radiation in the photosynthetically active region of 0.4-0.7 micron	uE/m^2/s
Uni-Southampton ISAR SST	Radiation sea surface temperature	Bridge Wing (Port)				
			isarWaterTemp	No	ISAR Water Temperature	Degree Celsius (degC)

### Air Sampling Systems:

CSIRO air sampling inlet	Air inlet controller	foremast				
			inletBearing	No	Air sampling inlet bearing	degree
			trackingBearing	No	Tracking target bearing	degree
Thermo Scientific MAAP Model 5102	Multi-angle Absorption Photometer (MAAP)	Aerosol Lab (air sampling inlet)				
			blackCarbonConc	No	Concentration of black carbon	ug/m^3
			airFlow	No	Air flow rate	Litre per Hour (L/h)
Thermo Scientific Model 49i Ozone Analyzer	Ozone Monitor					
			o3Ozone1	No	Ozone measurement	ppb
			ozone1Meterflags	No	Instrument specific quality flag	n/a
Thermo Scientific Model 49i Ozone Analyzer	Ozone Monitor					
			o3Ozone2	No	Ozone measurement	ppb
			ozone2Meterflags	No	Instrument specific quality flag	n/a
Picarro Model G2301 CRDS Analyzer	Greenhouse Gas Spectrometer CO2, CH4, H2O Near IR Laser					
			co2Dry	No	CO2 dry concentration	ppm
			ch4Dry	No	CH4 dry concentration	ppm
			H2O	No	Water concentration percentage	Dimensionless

### Depth:

Kongsberg EM122 multibeam sounder		Gondola	depth	No	Water depth,	meters
Kongsberg EM710 multibeam sounder		Gondola	depth	No	Water depth,	meters
EK60, 18KHz sounder		Port Drop Keel	Depth, (if not provided by EM122 or EM710)	No	Water depth	meters

**TABLE-2: Location of Meteorological Instruments:**

<b>Date:</b>	26/03/2019					
<b>Surveyors:</b>	Stuart Edwards					
	Matt Boyd					
	CSIRO GSM Team					
<b>Instrument:</b>	Leica TCRP 1205+ Total Station AND extrapolation from drawings					
Sensors surveyed with respect to existing vessel coordinate system:						
	X-axis is positive toward starboard and perpendicular to Y-axis					
	Y-axis is positive forward and parallel to vessel centreline keel					
	Z-axis is positive upwards					
CRP is MRU5+ located in transceiver room on 1st platform deck						
MRU5+ is 2.066m to Starboard of the V/L centreline & 53.439m fwd from transom. (Obtained from Parker Maritime)						
ΔH of Load Line measured from O2 level with Plumbob and tape, 9m from O2 Deck. Height of O2 deck calculated to be 8.707m above CRP on 1st Plat deck. Load Line height datum below vessel CRP						
ID	Description	X	Y	Z	Comment	Final Height Above Summer Load Line
LL	Summer Load Line	7.222	-10.695	-0.293	Waterline reference	0.000
WS1	Foremast Propeller Anemometer Stbd	-0.513	35.811	24.487	Measured to base of sensor	24.780
WS2	Foremast Propeller Anemometer Port	-3.361	35.867	24.228	Measured to base of sensor	24.521
WS3	Foremast Gill Ultrasonic Anemometer	-3.344	35.986	21.812	Measured to base of sensor	22.105
WS4	Precipitation Sensor Siphoning Port (formerly called "Central")	-2.621	35.999	21.260	Measured to base of sensor	21.553
WS10	Monkey Island Radiometer Plate Stbd	-0.164	-0.430	24.980	Measured to centre bottom face of disc	25.273
WS11	Monkey Island Radiometer Plate Port	-3.753	-0.389	24.927	Measured to centre bottom face of disc	25.220
WS12	Bridge Digital Barometer	-1.559	-4.243	20.265	Measured to centre of unit	20.558
WS13	SST Radiometer (Port Bridge Wing)	-11.77	-3.3	19.3	Measured to centre of bottle (Taped Measurement)	19.593
	Foremast T&RH Sensor (Port)	-2.636	35.1	24.451	Relative measurements and estimates from drawings	24.744
	Foremast T&RH Sensor (Starboard)	-1.253	35.101	24.451	Relative measurements and estimates from drawings	24.744
	Precipitation Sensor Siphoning (Starboard)	-1.241	35.101	21.260	Relative measurements and estimates from drawings	21.553
	Foremast Digital Barometer	-3.316	32.596	9.61	Relative measurements and estimates from drawings	9.903

**TABLE-3: Drop Keel Data**

Drop Keel Position	Reference Point	Vertical Offset in metres (positive up)			
		Flush with Hull	Flush with gondola	Intermediate	Fully extracted
<b>Drop Keel Extension</b>	<b>Base of Hull</b>	<b>0.00</b>	<b>-1.194</b>	<b>-2.00</b>	<b>-4.00</b>
Base of Hull	Ship's Central reference Point (CRP)	-6.54			
Base of Drop Keel	CRP	-6.54	-7.73	-8.54	-10.54
SBE38 SST Intake	Base of Drop Keel	0.30			
SBE38 SST Intake	CRP	-6.24	-7.43	-8.24	-10.24
Summer Load Line (SLL)	CRP	-0.29			
<b>SBE38 SST Intake</b>	<b>SLL (ie Depth below waterline)</b>	<b>-5.95</b>	<b>-7.14</b>	<b>-7.95</b>	<b>-9.95</b>
TSG Intake	Base of Drop Keel	0.54			
TSG Intake	CRP	-6.00	-7.19	-8.00	-10.00
<b>TSG Intake</b>	<b>SLL (ie Depth below waterline)</b>	<b>-5.71</b>	<b>-6.90</b>	<b>-7.71</b>	<b>-9.71</b>

The above information was compiled from the following CSIRO internal documents:

- [1] [\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\GSM\RV Investigator\Calibration Data and Reports\Dimensional Control Report\13000615B\\_RV Investigator.pdf](\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\GSM\RV Investigator\Calibration Data and Reports\Dimensional Control Report\13000615B_RV Investigator.pdf)
- [2] <\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Met Station\Documentation\Met Instrument Location Survey\Radialshots Weathersensors Rev4.xlsx>
- [3] <\\fstas1-hba.nexus.csiro.au\CMAR-SHARE4\Groups\Marine Technology and Equipment\Marine Instrumentation\Data\Investigator\System Documentation\Drop Keels\RV Investigator Drop Keel Arrangements.docx>