

RV Investigator

ADCP Processing Report

Voyage:	IN2021_V02
Voyage title:	SOTS: Southern Ocean Time Series automated moorings for climate and carbon cycle studies Southwest of Tasmania
Depart:	Hobart, 18:00 Wednesday 14 th April 2021
Return:	Hobart, 08:00 Wednesday 28 th April 2021
Chief Scientist:	Dr Elizabeth Shadwick
Affiliation:	CSIRO/AAPP
ADCP Processing:	V. Dirita

Document History

Date	Version	Author	Comments
04/07/2022	1.0	Vito Dirita	Initial version



Contents

1	Summary.....	3
2	Processing Background.....	3
3	Processing Notes	3
4	Area Covered	3
5	netCDF Data Headers	5
5.1	in2021_v02_os75nb.nc.....	5
5.2	in2021_v02_os150nb.nc.....	8

1 Summary

The Southern Ocean has a predominant role in the movement of heat and carbon dioxide into the ocean interior moderating Earth's average surface climate. The IMOS SOTS sub-facility uses a set of two automated moorings to measure these processes under extreme conditions, where they are most intense and have been least studied. The atmosphere-ocean exchanges occur on many timescales, from daily insolation cycles to ocean basin decadal oscillations and thus high frequency observations sustained over many years are required. The current context of anthropogenic forcing of rapid climate change adds urgency to the work.

2 Processing Background

On the 19th of April it was noted that there was substantial "striping" in the data being collected by the shipboard ADCP. This was in part due to the broadband mode of the OS75 being on, but perhaps also the extremely rough weather that the Investigator was experiencing. The procedures for what settings should be used and when was updated accordingly.

ADCPs were run in un-triggered mode for the length of the voyage, with occasional outages during periods when the priority was to avoid interference with the multibeam or the acoustic release system.

The University of Hawaii's CODAS software `codas_focal_20.04_vbox64.ova` was used for processing.

3 Processing Notes

Only minor editing was required, Data was masked where instrument anomalies were suspected and where the os75 and os150 data differed significantly. A heading correction was applied to both ADCPs using `patch_hcorr.py` using bottom track:

Amplitude and phase rotation corrections applied:

OS75		OS150	
Amplitude	Phase	Amplitude	Phase
0.9961	0.1267	1.0037	0.0166


Final bottom track amplitude and phase are both within the required values of: phase within 0.05deg, and amplitude should be very close to 1.00 (within 0.3%)

OS75		OS150	
Amplitude	Phase	Amplitude	Phase
0.9998	-0.0025	0.9999	0.0149

When processing the data, the true transducer offsets in metres from the GPS position of the ship in (meters) are as follows:

OS75		OS150	
dx (m)	dy (m)	dx (m)	dy (m)
-1.0	4.0	-1.0	1.0

4. Area Covered

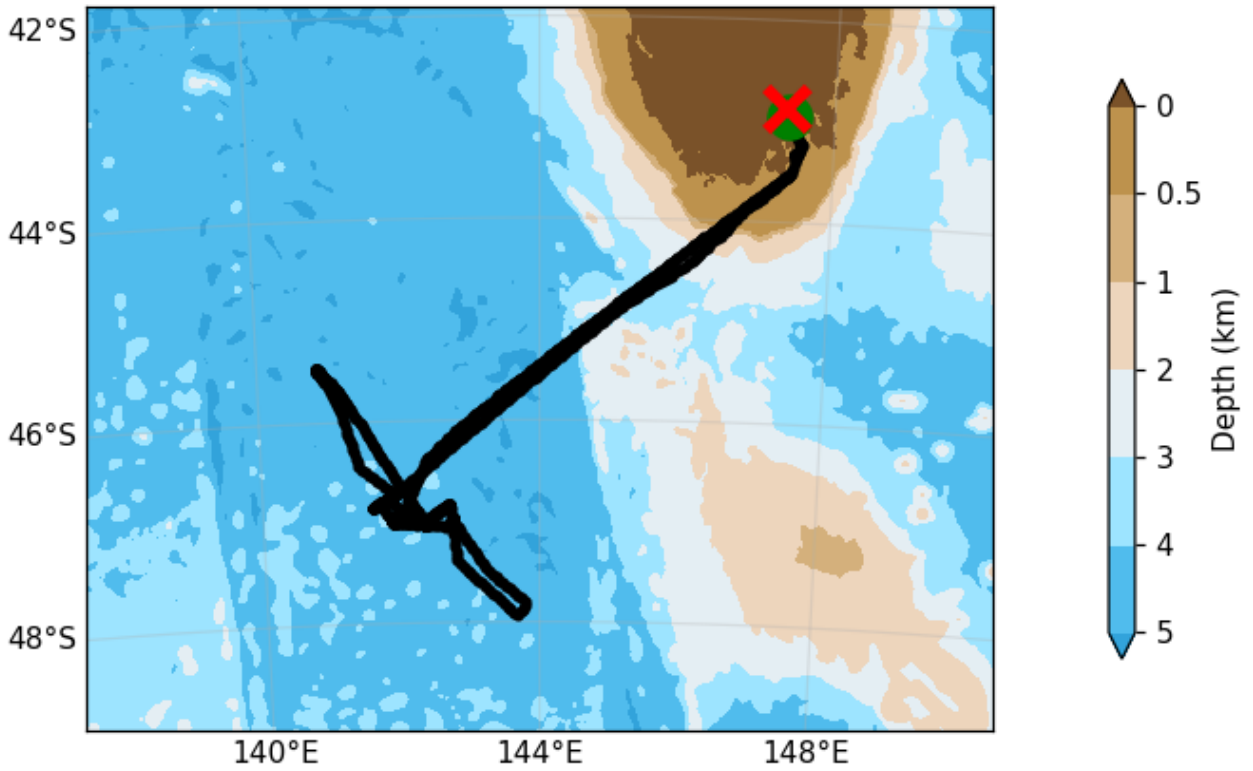

IN2021_V02 Voyage Track

4 netCDF Data Headers

4.1 in2021_v02_os75nb.nc

```
codaspy:(os75nb)$ ncdump -h in2021_v02_os75nb.nc
netcdf in2021_v02_os75nb {
dimensions:
    time = 3482 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2021-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 103.376400462963 ;
        time:data_max = 116.927743055556 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees_east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 140.844525 ;
        lon:data_max = 147.572630555556 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees_north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -47.9336833333333 ;
        lat:data_max = -42.8842305555556 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
        depth:units = "meter" ;
        depth:C_format = "%8.2f" ;
        depth:positive = "down" ;
        depth:data_min = 29.99f ;
        depth:data_max = 973.99f ;
    float u(time, depth_cell) ;
        u:missing_value = 1.e+38f ;
        u:long_name = "Zonal velocity component" ;
        u:units = "meter second-1" ;
        u:C_format = "%7.2f" ;
        u:data_min = -0.7766099f ;
        u:data_max = 1.338199f ;
    float v(time, depth_cell) ;
        v:missing_value = 1.e+38f ;
        v:long_name = "Meridional velocity component" ;
        v:units = "meter second-1" ;
        v:C_format = "%7.2F" ;
        v:data_min = -0.7698638f ;
        v:data_max = 0.9802704f ;
    short amp(time, depth_cell) ;
        amp:missing_value = 32767s ;
        amp:long_name = "Received signal strength" ;
        amp:C_format = "%d" ;
        amp:data_min = 13s ;
        amp:data_max = 217s ;
    byte pg(time, depth_cell) ;
        pg:missing_value = -1b ;
        pg:long_name = "Percent good pings" ;
        pg:C_format = "%d" ;
        pg:data_min = 0b ;
        pg:data_max = 100b ;
    byte pflag(time, depth_cell) ;
        pflag:long_name = "Editing flags" ;
        pflag:C_format = "%d" ;
        pflag:data_min = 0b ;
        pflag:data_max = 6b ;
    float heading(time) ;
```

```
heading:missing_value = 1.e+38f ;
heading:long_name = "Ship heading" ;
heading:units = "degrees" ;
heading:C_format = "%6.1f" ;
heading:data_min = -177.8793f ;
heading:data_max = 178.3809f ;
float tr_temp(time) ;
tr_temp:missing_value = 1.e+38f ;
tr_temp:long_name = "ADCP transducer temperature" ;
tr_temp:units = "Celsius" ;
tr_temp:C_format = "%4.1f" ;
tr_temp:data_min = 10.58606f ;
tr_temp:data_max = 17.80361f ;
short num_pings(time) ;
num_pings:long_name = "Number of pings averaged per ensemble" ;
num_pings:units = "None" ;
num_pings:C_format = "%d" ;
num_pings:data_min = 10s ;
num_pings:data_max = 133s ;
float uship(time) ;
uship:missing_value = 1.e+38f ;
uship:long_name = "Ship zonal velocity component" ;
uship:units = "meter second-1" ;
uship:C_format = "%9.4f" ;
uship:data_min = -5.913909f ;
uship:data_max = 5.97146f ;
float vship(time) ;
vship:missing_value = 1.e+38f ;
vship:long_name = "Ship meridional velocity component" ;
vship:units = "meter second-1" ;
vship:C_format = "%9.4f" ;
vship:data_min = -5.981708f ;
vship:data_max = 5.854865f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2022-07-04 05:38:48 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "3211:63370479787a" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2021_v02 using instrument os75nb -
Short Version." ;
:cruise_id = "in2021_v02" ;
:sonar = "os75nb" ;
:yearbase = 2021 ;
:ship_name = "RV_Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time          Time at the end of the ensemble, days from start of year.\n",
    "lon, lat      Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v           Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship  Zonal and meridional velocity components of the ship.\n",
    "heading       Mean ship heading during the ensemble.\n",
    "depth         Bin centers in nominal meters (no sound speed profile correction).\n",
    "tr_temp       ADCP transducer temperature.\n",
    "pg           Percent Good pings for u, v averaging after editing.\n",
    "pflag         Profile Flags based on editing, used to mask u, v.\n",
    "amp           Received signal strength in ADCP-specific units; no correction\n",
    "              for spreading or attenuation.\n",
    "=====\n",
    "\n",
    " " ;
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "=====\n",
    "\n",
    "Overview\n",
    "-----\n",
    "The CODAS database is a specialized storage format designed for\n",
    "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
```

"averaged shipboard ADCP velocities and other variables, during the\n",
"stages of data processing. The CODAS database stores velocity\n",
"profiles relative to the ship as east and north components along with\n",
"position, ship speed, heading, and other variables. The netCDF *short*\n",
"form contains ocean velocities relative to earth, time, position,\n",
"transducer temperature, and ship heading; these are designed to be\n",
"ready for immediate use". The netCDF *long* form is just a dump of\n",
"the entire CODAS database. Some variables are no longer used, and all\n",
"have names derived from their original CODAS names, dating back to the\n",
"late 1980's.\n",
"\n",
"Post-processing\n",
"-----\n",
"CODAS post-processing, i.e. that which occurs after the single-ping\n",
"profiles have been vector-averaged and loaded into the CODAS database,\n",
"includes editing (using automated algorithms and manual tools),\n",
"rotation and scaling of the measured velocities, and application of a\n",
"time-varying heading correction. Additional algorithms developed more\n",
"recently include translation of the GPS positions to the transducer\n",
"location, and averaging of ship's speed over the times of valid pings\n",
"when Percent Good is reduced. Such post-processing is needed prior to\n",
"submission of \"processed ADCP data\" to JASADCP or other archives.\n",
"\n",
"Full CODAS processing\n",
"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"hull, the beam velocities are transformed to horizontal, vertical, and\n",
"error velocity components. Using a reliable heading (typically from\n",
"the ship's gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
" positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrck_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to $(u+iv) * (\exp(i\theta))$ where θ is the sum of the\n",
"corrected heading and the transducer angle.\n",

```
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrck_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrck_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary      decimal      below      Percent\n",
"value      value      bottom      Good      bin\n",
"-----+-----+-----+-----+\n",
"000          0\n",
"001          1                      bad\n",
"010          2                      bad\n",
"011          3                      bad\n",
"100          4          bad\n",
"101          5          bad                      bad\n",
"110          6          bad          bad\n",
"111          7          bad          bad          bad\n",
"-----+-----+-----+-----+\n",
" ;
}
```

4.2 in2021_v02_os150nb.nc

```
codaspy:(os150nb)$ ncdump -h in2021_v02_os150nb.nc
netcdf in2021_v02_os150nb {
dimensions:
    time = 3484 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2021-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 103.376388888889 ;
        time:data_max = 116.927708333333 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees_east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 140.844558333333 ;
        lon:data_max = 147.572633333333 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees_north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -47.9336805555556 ;
        lat:data_max = -42.8842416666667 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
```



```
depth:units = "meter" ;
depth:C_format = "%8.2f" ;
depth:positive = "down" ;
depth:data_min = 17.93f ;
depth:data_max = 489.99f ;
float u(time, depth_cell) ;
u:missing_value = 1.e+38f ;
u:long_name = "Zonal velocity component" ;
u:units = "meter second-1" ;
u:C_format = "%7.2f" ;
u:data_min = -0.7800536f ;
u:data_max = 0.5561318f ;
float v(time, depth_cell) ;
v:missing_value = 1.e+38f ;
v:long_name = "Meridional velocity component" ;
v:units = "meter second-1" ;
v:C_format = "%7.2f" ;
v:data_min = -0.478281f ;
v:data_max = 0.6010385f ;
short amp(time, depth_cell) ;
amp:missing_value = 32767s ;
amp:long_name = "Received signal strength" ;
amp:C_format = "%d" ;
amp:data_min = 21s ;
amp:data_max = 229s ;
byte pg(time, depth_cell) ;
pg:missing_value = -1b ;
pg:long_name = "Percent good pings" ;
pg:C_format = "%d" ;
pg:data_min = 0b ;
pg:data_max = 100b ;
byte pflag(time, depth_cell) ;
pflag:long_name = "Editing flags" ;
pflag:C_format = "%d" ;
pflag:data_min = 0b ;
pflag:data_max = 6b ;
float heading(time) ;
heading:missing_value = 1.e+38f ;
heading:long_name = "Ship heading" ;
heading:units = "degrees" ;
heading:C_format = "%6.1f" ;
heading:data_min = -177.2472f ;
heading:data_max = 178.5323f ;
float tr_temp(time) ;
tr_temp:missing_value = 1.e+38f ;
tr_temp:long_name = "ADCP transducer temperature" ;
tr_temp:units = "Celsius" ;
tr_temp:C_format = "%4.1f" ;
tr_temp:data_min = 10.41506f ;
tr_temp:data_max = 16.33846f ;
short num_pings(time) ;
num_pings:long_name = "Number of pings averaged per ensemble" ;
num_pings:units = "None" ;
num_pings:C_format = "%d" ;
num_pings:data_min = 10s ;
num_pings:data_max = 251s ;
float uship(time) ;
uship:missing_value = 1.e+38f ;
uship:long_name = "Ship zonal velocity component" ;
uship:units = "meter second-1" ;
uship:C_format = "%9.4f" ;
uship:data_min = -5.93757f ;
uship:data_max = 5.977304f ;
float vship(time) ;
vship:missing_value = 1.e+38f ;
vship:long_name = "Ship meridional velocity component" ;
vship:units = "meter second-1" ;
vship:C_format = "%9.4f" ;
vship:data_min = -5.98432f ;
vship:data_max = 5.855728f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2022-07-04 05:39:34 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "3211:63370479787a" ;
```

```
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2021_v02 using instrument os150nb -
Short Version." ;
:cruise_id = "in2021_v02" ;
:sonar = "os150nb" ;
:yearbase = 2021 ;
:ship_name = "RV_Investigator" ;
:CODAS_variables = "\n",
  "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
  "scientific analysis and display purposes. For additional information see\n",
  "the CODAS_processing_note global attribute and the attributes of each\n",
  "of the variables.\n",
  "\n",
  "\n",
  "=====\n",
  "time          Time at the end of the ensemble, days from start of year.\n",
  "lon, lat      Longitude, Latitude from GPS at the end of the ensemble.\n",
  "u,v           Ocean zonal and meridional velocity component profiles.\n",
  "uship, vship  Zonal and meridional velocity components of the ship.\n",
  "heading       Mean ship heading during the ensemble.\n",
  "depth         Bin centers in nominal meters (no sound speed profile correction).\n",
  "tr_temp       ADCP transducer temperature.\n",
  "pg            Percent Good pings for u, v averaging after editing.\n",
  "pflag         Profile Flags based on editing, used to mask u, v.\n",
  "amp           Received signal strength in ADCP-specific units; no correction\n",
  "              for spreading or attenuation.\n",
  "=====\n",
  "\n",
  "" ;
:CODAS_processing_note = "\n",
  "CODAS processing note:\n",
  "=====\n",
  "\n",
  "Overview\n",
  "-----\n",
  "The CODAS database is a specialized storage format designed for\n",
  "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
  "averaged shipboard ADCP velocities and other variables, during the\n",
  "stages of data processing. The CODAS database stores velocity\n",
  "profiles relative to the ship as east and north components along with\n",
  "position, ship speed, heading, and other variables. The netCDF *short*\n",
  "form contains ocean velocities relative to earth, time, position,\n",
  "transducer temperature, and ship heading; these are designed to be\n",
  "\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
  "the entire CODAS database. Some variables are no longer used, and all\n",
  "have names derived from their original CODAS names, dating back to the\n",
  "late 1980's.\n",
  "\n",
  "Post-processing\n",
  "-----\n",
  "CODAS post-processing, i.e. that which occurs after the single-ping\n",
  "profiles have been vector-averaged and loaded into the CODAS database,\n",
  "includes editing (using automated algorithms and manual tools),\n",
  "rotation and scaling of the measured velocities, and application of a\n",
  "time-varying heading correction. Additional algorithms developed more\n",
  "recently include translation of the GPS positions to the transducer\n",
  "location, and averaging of ship's speed over the times of valid pings\n",
  "when Percent Good is reduced. Such post-processing is needed prior to\n",
  "submission of \"processed ADCP data\" to JASADCP or other archives.\n",
  "\n",
  "Full CODAS processing\n",
  "-----\n",
  "Whenever single-ping data have been recorded, full CODAS processing\n",
  "provides the best end product.\n",
  "\n",
  "Full CODAS processing starts with the single-ping velocities in beam\n",
  "coordinates. Based on the transducer orientation relative to the\n",
  "hull, the beam velocities are transformed to horizontal, vertical, and\n",
  "\"error velocity\" components. Using a reliable heading (typically from\n",
  "the ship's gyro compass), the velocities in ship coordinates are\n",
  "rotated into earth coordinates.\n",
  "\n",
  "Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
  "and undergo a suite of automated editing algorithms (removal of\n",
  "acoustic interference; identification of the bottom; editing based on\n",
  "thresholds; and specialized editing that targets CTD wire interference\n",
  "and \"weak, biased profiles\". The ensemble of single-ping velocities
```

```

"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"    positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrck_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to (u+i*v)*(exp(i*theta)) where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrck_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrck_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value     bottom   Good      bin\n",
"-----+-----+-----+-----+\n",
"000        0\n",
"001        1                bad\n",
"010        2                bad\n",
"011        3                bad\n",
"100        4                bad\n",
"101        5                bad\n",
"110        6                bad\n",
"111        7                bad\n",
"-----+-----+-----+-----+\n",
"" ;

```

}