

RV Investigator

ADCP Processing Report

Voyage ID:	IN2022_V05
Voyage Title:	Tsunamigenic submarine landslides and deep-marine canyons of Australia's Tasman Sea margin
Depart:	Hobart (Self's Point), 1200 Saturday 28 th May 2022
Return:	Brisbane (Pinkenba), 0900 Sunday 3 rd July 2022
Chief Scientist:	Dr Tom Hubble
Affiliation:	University of Sydney
ADCP Processing:	V. Dirita (CSIRO MNF Data Acquisition and Processing)

Document Revision History

Date	Version	Author	Comments
12/08/2022	1.0	Vito Dirita	Initial Draft
	1.1	Vito Dirita	Pre Release version
	1.2	Vito Dirita	Final Version



Contents

1	Summary.....	3
2	Processing Background.....	3
3	Processing Notes	3
4	Area Covered	3
5	NetCDF Data Headers.....	5
5.1	in2022_v05_os75nb.nc.....	5
5.2	in2022_v05_os150nb.nc.....	8

1 Summary

The aim of the voyage was to utilise seismic reflection profiling, swath mapping, coring, and dredging capabilities of the RV Investigator to gather the data required to test competing models for the South Eastern Australia's continental margin geologic evolution and how its submarine landslides generate dangerous and potentially lethal tsunamis.

The ADCPs ran well throughout the voyage. OS75 and/or OS150 ADCPs were intermittently isolated to reduce interference with multibeam systems as required.

As required GSM were turning off one or both of the ADCPs, generally in less than 500m depths, to avoid the significant acoustic interference this generates (particularly between the OS75 and EM710). Changes to the ADCPs were logged and DAP informed with multibeam bathymetry generally being the scientific priority.

Data was collected using UHDAS and post-processed using CODAS. Both the RDI Ocean Surveyor 150kHz ADCP and the RDI Ocean Surveyor 75kHz ADCP were run in narrowband. Internal triggering was used. The drop keel was set at 7m below the waterline for the duration of the voyage.

Please refer to the voyage Computing and Instrumentation reports for further details regarding data acquisition.

2 Processing Background

The University of Hawaii's CODAS software `codas_focal_20.04_vbox64.ova` was used for processing.

3 Processing Notes

Only minor editing was required, Data was masked where instrument anomalies were suspected and where the os75 and os150 data differed significantly. A heading correction was applied to both ADCPs using `patch_hcorr.py` using water track and bottom track:

Amplitude and phase rotation corrections applied:

OS75		OS150	
Amplitude	Phase	Amplitude	Phase
1.0030	0.2010	1.0036	-0.0552

Final water track (OS75) and bottom track (OS150) amplitude and phase:


OS75 (water-track)		OS150 (bottom-track)	
Amplitude	Phase	Amplitude	Phase
1.0005	0.0010	1.0000	0.0000

It was not possible to use bottom-track calibration for the OS75.

When processing the data, the true transducer offsets in metres from the GPS position of the ship in (meters) are as follows:

OS75		OS150	
dx (m)	dy (m)	dx (m)	dy (m)
-1.0	4.0	-1.0	1.0

4. Area Covered

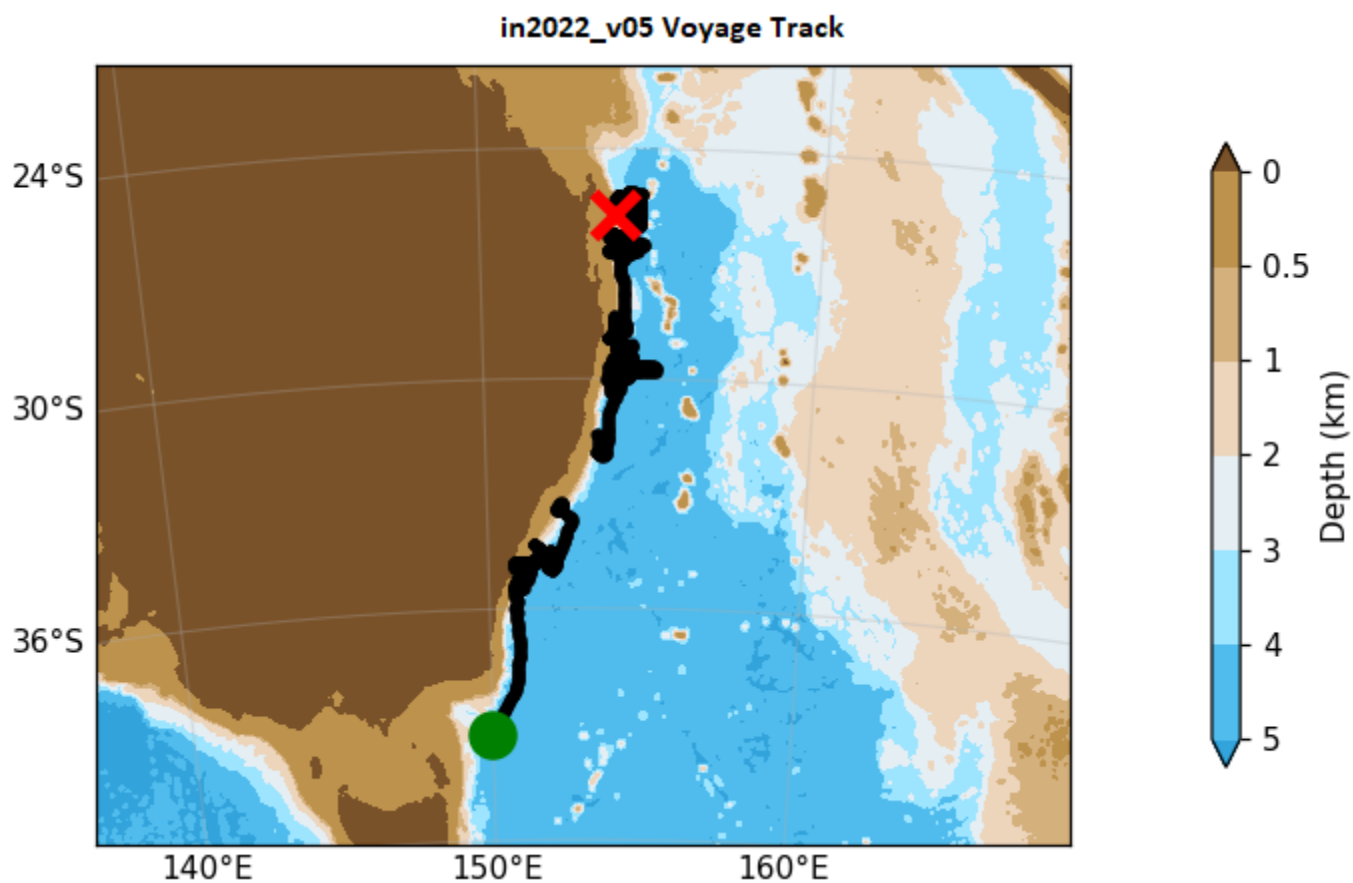

Area surveyed by both OS75 and OS150 transducers.

Data latitude range: -39.260 to -25.116, longitude range: 149.975 to 155.221.

Data dates: 29-May-2022 05:28 to 01-Jul-2022 06:05

4 NetCDF Data Headers

4.1 in2022_v05_os75nb.nc

```
netcdf in2022_v05_os75nb {
dimensions:
    time = 7322 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2022-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 148.228020833333 ;
        time:data_max = 181.254583333333 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees_east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 149.974955555556 ;
        lon:data_max = 155.220841666667 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees_north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -39.2602 ;
        lat:data_max = -25.1162111111111 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
        depth:units = "meter" ;
        depth:C_format = "%8.2f" ;
        depth:positive = "down" ;
        depth:data_min = 29.99f ;
        depth:data_max = 973.99f ;
    float u(time, depth_cell) ;
        u:missing_value = 1.e+38f ;
        u:long_name = "Zonal velocity component" ;
        u:units = "meter second-1" ;
        u:C_format = "%7.2f" ;
        u:data_min = -0.7438152f ;
        u:data_max = 1.342378f ;
    float v(time, depth_cell) ;
        v:missing_value = 1.e+38f ;
        v:long_name = "Meridional velocity component" ;
        v:units = "meter second-1" ;
        v:C_format = "%7.2f" ;
        v:data_min = -1.416503f ;
        v:data_max = 0.7125399f ;
    short amp(time, depth_cell) ;
        amp:missing_value = 32767s ;
        amp:long_name = "Received signal strength" ;
        amp:C_format = "%d" ;
        amp:data_min = 27s ;
        amp:data_max = 218s ;
    byte pg(time, depth_cell) ;
        pg:missing_value = -1b ;
        pg:long_name = "Percent good pings" ;
        pg:C_format = "%d" ;
        pg:data_min = 0b ;
        pg:data_max = 100b ;
    byte pflag(time, depth_cell) ;
        pflag:long_name = "Editing flags" ;
        pflag:C_format = "%d" ;
        pflag:data_min = 0b ;
        pflag:data_max = 6b ;
```

```

float heading(time) ;
    heading:missing_value = 1.e+38f ;
    heading:long_name = "Ship heading" ;
    heading:units = "degrees" ;
    heading:C_format = "%6.1f" ;
    heading:data_min = -179.995f ;
    heading:data_max = 179.9193f ;
float tr_temp(time) ;
    tr_temp:missing_value = 1.e+38f ;
    tr_temp:long_name = "ADCP transducer temperature" ;
    tr_temp:units = "Celsius" ;
    tr_temp:C_format = "%4.1f" ;
    tr_temp:data_min = 17.37511f ;
    tr_temp:data_max = 24.28376f ;
short num_pings(time) ;
    num_pings:long_name = "Number of pings averaged per ensemble" ;
    num_pings:units = "None" ;
    num_pings:C_format = "%d" ;
    num_pings:data_min = 27s ;
    num_pings:data_max = 133s ;
float uship(time) ;
    uship:missing_value = 1.e+38f ;
    uship:long_name = "Ship zonal velocity component" ;
    uship:units = "meter second-1" ;
    uship:C_format = "%9.4f" ;
    uship:data_min = -6.228689f ;
    uship:data_max = 6.435414f ;
float vship(time) ;
    vship:missing_value = 1.e+38f ;
    vship:long_name = "Ship meridional velocity component" ;
    vship:units = "meter second-1" ;
    vship:C_format = "%9.4f" ;
    vship:data_min = -6.963654f ;
    vship:data_max = 6.372007f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2022-08-11 07:12:45 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "3211:63370479787a" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2022_v05 using instrument os75nb - Short
Version." ;

:cruise_id = "in2022_v05" ;
:sonar = "os75nb" ;
:yearbase = 2022 ;
:ship_name = "RV_Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time      Time at the end of the ensemble, days from start of year.\n",
    "lon, lat   Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v        Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship Zonal and meridional velocity components of the ship.\n",
    "heading    Mean ship heading during the ensemble.\n",
    "depth      Bin centers in nominal meters (no sound speed profile correction).\n",
    "tr_temp    ADCP transducer temperature.\n",
    "pg         Percent Good pings for u, v averaging after editing.\n",
    "pflag      Profile Flags based on editing, used to mask u, v.\n",
    "amp        Received signal strength in ADCP-specific units; no correction\n",
    "            for spreading or attenuation.\n",
    "=====\n",
    "\n",
    "" ;
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "=====\n",
    "\n",

```

```

"Overview\n",
"-----\n",
"The CODAS database is a specialized storage format designed for\n",
"shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
"averaged shipboard ADCP velocities and other variables, during the\n",
"stages of data processing. The CODAS database stores velocity\n",
"profiles relative to the ship as east and north components along with\n",
"position, ship speed, heading, and other variables. The netCDF *short*\n",
"form contains ocean velocities relative to earth, time, position,\n",
"transducer temperature, and ship heading; these are designed to be\n",
"\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
"the entire CODAS database. Some variables are no longer used, and all\n",
"have names derived from their original CODAS names, dating back to the\n",
"late 1980's.\n",
"\n",
"Post-processing\n",
"-----\n",
"CODAS post-processing, i.e. that which occurs after the single-ping\n",
"profiles have been vector-averaged and loaded into the CODAS database,\n",
"includes editing (using automated algorithms and manual tools),\n",
"rotation and scaling of the measured velocities, and application of a\n",
"time-varying heading correction. Additional algorithms developed more\n",
"recently include translation of the GPS positions to the transducer\n",
"location, and averaging of ship's speed over the times of valid pings\n",
"when Percent Good is reduced. Such post-processing is needed prior to\n",
"submission of \"processed ADCP data\" to JASADCP or other archives.\n",
"\n",
"Full CODAS processing\n",
"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"hull, the beam velocities are transformed to horizontal, vertical, and\n",
"\"error velocity\" components. Using a reliable heading (typically from\n",
"the ship's gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"    positive clockwise (beam 3 angle relative to ship)

```

```

"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrkh_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to (u+i*v)*(exp(i*theta)) where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrkh_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrkh_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",


| binary | decimal | below  | Percent |     |
|--------|---------|--------|---------|-----|
| value  | value   | bottom | Good    | bin |
| 000    | 0       |        |         |     |
| 001    | 1       |        |         | bad |
| 010    | 2       |        | bad     |     |
| 011    | 3       |        | bad     | bad |
| 100    | 4       | bad    |         |     |
| 101    | 5       | bad    |         | bad |
| 110    | 6       | bad    | bad     |     |
| 111    | 7       | bad    | bad     | bad |


"-----\n",
"" ;

```

}

4.2 in2022_v05_os150nb.nc

```

netcdf in2022_v05_os150nb {
dimensions:
    time = 9887 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2022-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 147.230833333333 ;
        time:data_max = 182.666631944444 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees_east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 147.799175 ;
        lon:data_max = 155.220841666667 ;
    double lat(time) ;

```



```
    lat:missing_value = 1.e+38 ;
    lat:long_name = "Latitude" ;
    lat:units = "degrees_north" ;
    lat:C_format = "%9.4f" ;
    lat:standard_name = "latitude" ;
    lat:data_min = -43.277155555556 ;
    lat:data_max = -25.117308333333 ;
float depth(time, depth_cell) ;
    depth:missing_value = 1.e+38f ;
    depth:long_name = "Depth" ;
    depth:units = "meter" ;
    depth:C_format = "%8.2f" ;
    depth:positive = "down" ;
    depth:data_min = 17.93f ;
    depth:data_max = 489.99f ;
float u(time, depth_cell) ;
    u:missing_value = 1.e+38f ;
    u:long_name = "Zonal velocity component" ;
    u:units = "meter second-1" ;
    u:C_format = "%7.2f" ;
    u:data_min = -1.265353f ;
    u:data_max = 1.366108f ;
float v(time, depth_cell) ;
    v:missing_value = 1.e+38f ;
    v:long_name = "Meridional velocity component" ;
    v:units = "meter second-1" ;
    v:C_format = "%7.2f" ;
    v:data_min = -1.561003f ;
    v:data_max = 0.6797502f ;
short amp(time, depth_cell) ;
    amp:missing_value = 32767s ;
    amp:long_name = "Received signal strength" ;
    amp:C_format = "%d" ;
    amp:data_min = 22s ;
    amp:data_max = 228s ;
byte pg(time, depth_cell) ;
    pg:missing_value = -1b ;
    pg:long_name = "Percent good pings" ;
    pg:C_format = "%d" ;
    pg:data_min = 0b ;
    pg:data_max = 100b ;
byte pflag(time, depth_cell) ;
    pflag:long_name = "Editing flags" ;
    pflag:C_format = "%d" ;
    pflag:data_min = 0b ;
    pflag:data_max = 6b ;
float heading(time) ;
    heading:missing_value = 1.e+38f ;
    heading:long_name = "Ship heading" ;
    heading:units = "degrees" ;
    heading:C_format = "%6.1f" ;
    heading:data_min = -179.9846f ;
    heading:data_max = 179.9944f ;
float tr_temp(time) ;
    tr_temp:missing_value = 1.e+38f ;
    tr_temp:long_name = "ADCP transducer temperature" ;
    tr_temp:units = "Celsius" ;
    tr_temp:C_format = "%4.1f" ;
    tr_temp:data_min = 14.35875f ;
    tr_temp:data_max = 24.13636f ;
short num_pings(time) ;
    num_pings:long_name = "Number of pings averaged per ensemble" ;
    num_pings:units = "None" ;
    num_pings:C_format = "%d" ;
    num_pings:data_min = 23s ;
    num_pings:data_max = 251s ;
float uship(time) ;
    uship:missing_value = 1.e+38f ;
    uship:long_name = "Ship zonal velocity component" ;
    uship:units = "meter second-1" ;
    uship:C_format = "%9.4f" ;
    uship:data_min = -6.318549f ;
    uship:data_max = 6.4403f ;
float vship(time) ;
```

```
vship:missing_value = 1.e+38f ;
vship:long_name = "Ship meridional velocity component" ;
vship:units = "meter second-1" ;
vship:C_format = "%9.4f" ;
vship:data_min = -7.027188f ;
vship:data_max = 6.367308f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2022-08-11 07:12:05 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "3211:63370479787a" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2022_v05 using instrument os150nb - Short
Version." ;

:cruise_id = "in2022_v05" ;
:sonar = "os150nb" ;
:yearbase = 2022 ;
:ship_name = "RV_Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time      Time at the end of the ensemble, days from start of year.\n",
    "lon, lat  Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v       Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship Zonal and meridional velocity components of the ship.\n",
    "heading   Mean ship heading during the ensemble.\n",
    "depth     Bin centers in nominal meters (no sound speed profile correction).\n",
    "tr_temp   ADCP transducer temperature.\n",
    "pg        Percent Good pings for u, v averaging after editing.\n",
    "pflag     Profile Flags based on editing, used to mask u, v.\n",
    "amp       Received signal strength in ADCP-specific units; no correction\n",
    "           for spreading or attenuation.\n",
    "=====\n",
    "\n",
    "" ;
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "=====\n",
    "\n",
    "Overview\n",
    "-----\n",
    "The CODAS database is a specialized storage format designed for\n",
    "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
    "averaged shipboard ADCP velocities and other variables, during the\n",
    "stages of data processing. The CODAS database stores velocity\n",
    "profiles relative to the ship as east and north components along with\n",
    "position, ship speed, heading, and other variables. The netCDF *short*\n",
    "form contains ocean velocities relative to earth, time, position,\n",
    "transducer temperature, and ship heading; these are designed to be\n",
    "\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
    "the entire CODAS database. Some variables are no longer used, and all\n",
    "have names derived from their original CODAS names, dating back to the\n",
    "late 1980's.\n",
    "\n",
    "Post-processing\n",
    "-----\n",
    "CODAS post-processing, i.e. that which occurs after the single-ping\n",
    "profiles have been vector-averaged and loaded into the CODAS database,\n",
    "includes editing (using automated algorithms and manual tools),\n",
    "rotation and scaling of the measured velocities, and application of a\n",
    "time-varying heading correction. Additional algorithms developed more\n",
    "recently include translation of the GPS positions to the transducer\n",
    "location, and averaging of ship's speed over the times of valid pings\n",
    "when Percent Good is reduced. Such post-processing is needed prior to\n",
    "submission of \"processed ADCP data\" to JASADCP or other archives.\n",
    "\n",
    "Full CODAS processing\n",
    "=====
```

```

"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"hull, the beam velocities are transformed to horizontal, vertical, and\n",
"\error velocity\" components. Using a reliable heading (typically from\n",
"the ship's gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"    positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watr_k_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to (u+i*v)*(exp(i*theta)) where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watr_k_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"            = X + G - (dh + R)\n",
"            = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watr_k_hd_misalign contains: dh + R\n",
"\n",
"=====

```

```
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value      bottom   Good      bin\n",
"-----+-----+-----+-----+\n",
"000        0\n",
"001         1\n",
"010         2\n",
"011         3\n",
"100         4\n",
"101         5\n",
"110         6\n",
"111         7\n",
"-----+-----+-----+-----+\n",
"" ;
```

}