



Operated by CSIRO,
Australia's National Science Agency,
on behalf of the nation

RV *Investigator* ADCP Data Processing Report

Voyage ID	IN2023_V01
Voyage Title	CANYONS - Antarctic Bottom Water Production in the past: Records from marine sediments, Cape Darnley, East Antarctica
Depart	Fremantle, 25 January 2023, 06:00 UTC
Return	Hobart, 02 March 2023, 08:00 UTC
Chief Scientist	Alix Post (Geoscience Australia)
Data Processor	Anoosh Sarraf (CSIRO – E&T Data Acquisition & Processing)



Document History

Date	Version	Author	Comments
12 May 2023	1.0	Anoosh Sarraf	Initial version

Contents

1	Summary.....	3
1.1	Voyage Track.....	4
2	Data Processing.....	4
2.1	Background Information.....	4
2.2	Processing Notes.....	4
3	NetCDF Data Headers.....	5
4	References.....	16

1 Summary

This voyage had two main scientific objectives. First, to understand past changes in Antarctic Bottom Water (AABW) production using long sediment cores from the continental slope over multiple warm periods during the Pleistocene. Second, to develop an improved bathymetry model to support oceanographic modelling of AABW pathways. Sediment core records of previous warmer interglacial will provide an analogue for understanding the impact of any future changes in bottom water production associated with a warming climate.

This report describes the production of quality-controlled ADCP data from RV *Investigator* voyage IN2023_V01.

The OS150 unit was run for the majority part of the voyage whilst the OS75 was run for parts of the voyage.

The OS75 showed unusual behaviour where the data depth was half the expected value at around 350m with low data quality. On-board investigation discovered that beams 1 and 2 of the OS75 unit were severely degraded and the fault was attributed to the likely failure of the ceramic arrays.

ADCP data were collected using the University of Hawaii Data Acquisition System (UHDAS) and post-processed using the Common Ocean Data Access System (CODAS). Documentation for these systems can be found in (Hummon, 2009-2021).

Both the RDI Ocean Surveyor 150kHz ADCP and the RDI Ocean Surveyor 75kHz ADCP were run in narrowband mode.

Internal triggering was used.

The drop keel (port) extension was set at below the waterline as detailed:

2m from the voyage start until 11-Feb-2023 09:20:05 UTC,

0m (Zero) from 11-Feb-2023 09:21:30 to 21-Feb-2023 23:24:15 UTC and

2m from 21-Feb-2023 23:25:05UTC to the end of the voyage.

There were several gaps in the OS75 ADCP data due to the investigation on board related to the fault discussed above and the reduction in the usual data quality resulted in extra processing effort being required. Apart from the usual data cleaning, there were no significant ADCP processing-related issues in relation to the OS150 data.

To access the full voyage plan and other reports and data associated with this voyage, please see the contact information at the end of this report.

1.1 Voyage Track

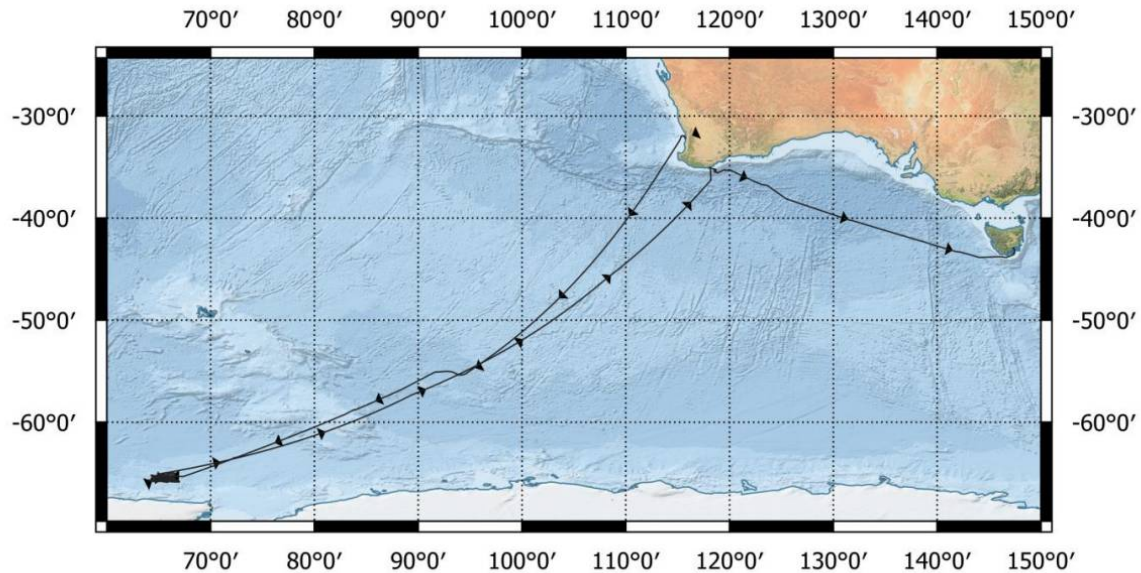


Figure 1: Voyage track

Please see the webpy folders for plots of collected data.

2 Data Processing

2.1 Background Information

The University of Hawaii's CODAS software (Built 2021-10-20) contained in their "focal_20.04" Virtual Machine image was used for data post-processing.

2.2 Processing Notes

Some editing was required, data were masked where instrument anomalies were suspected and where the OS75 and OS150 data differed significantly. A heading correction was applied to both ADCPs using `patch_hcorr.py` using bottom track calibration:

OS75		OS150	
Amplitude	Phase	Amplitude	Phase
0.9925	-0.1921	1.0036	-0.0576

Table 1: Amplitude and phase rotation corrections applied

OS75		OS150	
Amplitude	Phase	Amplitude	Phase
1.0000	-0.0087	1.0000	0.0054

Table 2: Final OS75 and OS150 amplitude and phase

Bottom-track Amplitude and Phase rotation calibration were applied to the data. When processing the data, the true transducer offsets from the GPS position of the ship were as follows:

OS75		OS150	
dx (m)	dy (m)	dx (m)	dy (m)
-1.0	4.0	-1.0	1.0

Table 3: True ADCP transducer offsets from GPS position

Instrument Serial Numbers

Manufacturer	Instrument	Serial Number
TRDI	ADCP 75 kHz	65008
TRDI	ADCP 150 kHz	61315

Table 4: ADCP serial numbers

3 NetCDF Data Headers

```
netcdf IN2023_V01_ADCP_os75nb {
dimensions:
    time = 3864 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2023-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 24.2813657407407 ;
        time:data_max = 58.0839467592593 ;
    double lon(time) ;
```

```

lon:missing_value = 1.e+38 ;
lon:long_name = "Longitude" ;
lon:units = "degrees_east" ;
lon:C_format = "%9.4f" ;
lon:standard_name = "longitude" ;
lon:data_min = 64.1857055555556 ;
lon:data_max = 139.744555555556 ;

double lat(time) ;
lat:missing_value = 1.e+38 ;
lat:long_name = "Latitude" ;
lat:units = "degrees_north" ;
lat:C_format = "%9.4f" ;
lat:standard_name = "latitude" ;
lat:data_min = -65.7205138888889 ;
lat:data_max = -31.9417083333333 ;

float depth(time, depth_cell) ;
depth:missing_value = 1.e+38f ;
depth:long_name = "Depth" ;
depth:units = "meter" ;
depth:C_format = "%8.2f" ;
depth:positive = "down" ;
depth:data_min = 37.97f ;
depth:data_max = 981.97f ;

float u(time, depth_cell) ;
u:missing_value = 1.e+38f ;
u:long_name = "Zonal velocity component" ;
u:units = "meter second-1" ;
u:C_format = "%7.2f" ;
u:data_min = -0.5558016f ;
u:data_max = 0.6671584f ;

float v(time, depth_cell) ;
v:missing_value = 1.e+38f ;
v:long_name = "Meridional velocity component" ;
v:units = "meter second-1" ;
v:C_format = "%7.2f" ;
v:data_min = -0.8177903f ;
v:data_max = 0.5523868f ;

short amp(time, depth_cell) ;
amp:missing_value = 32767s ;
amp:long_name = "Received signal strength" ;
amp:C_format = "%d" ;
amp:data_min = 26s ;
amp:data_max = 211s ;

byte pg(time, depth_cell) ;
pg:missing_value = -1b ;
pg:long_name = "Percent good pings" ;
pg:C_format = "%d" ;
pg:data_min = 0b ;

```

```

        pg:data_max = 100b ;
byte pflag(time, depth_cell) ;
        pflag:long_name = "Editing flags" ;
        pflag:C_format = "%d" ;
        pflag:data_min = 0b ;
        pflag:data_max = 6b ;
float heading(time) ;
        heading:missing_value = 1.e+38f ;
        heading:long_name = "Ship heading" ;
        heading:units = "degrees" ;
        heading:C_format = "%6.1f" ;
        heading:data_min = -179.6669f ;
        heading:data_max = 179.7303f ;
float tr_temp(time) ;
        tr_temp:missing_value = 1.e+38f ;
        tr_temp:long_name = "ADCP transducer temperature" ;
        tr_temp:units = "Celsius" ;
        tr_temp:C_format = "%4.1f" ;
        tr_temp:data_min = 0.7607692f ;
        tr_temp:data_max = 21.99367f ;
short num_pings(time) ;
        num_pings:long_name = "Number of pings averaged per ensemble" ;
        num_pings:units = "None" ;
        num_pings:C_format = "%d" ;
        num_pings:data_min = 10s ;
        num_pings:data_max = 132s ;
float uship(time) ;
        uship:missing_value = 1.e+38f ;
        uship:long_name = "Ship zonal velocity component" ;
        uship:units = "meter second-1" ;
        uship:C_format = "%9.4f" ;
        uship:data_min = -11.01978f ;
        uship:data_max = 5.732957f ;
float vship(time) ;
        vship:missing_value = 1.e+38f ;
        vship:long_name = "Ship meridional velocity component" ;
        vship:units = "meter second-1" ;
        vship:C_format = "%9.4f" ;
        vship:data_min = -11.01155f ;
        vship:data_max = 4.698584f ;

// global attributes:
        :featureType = "trajectoryProfile" ;
        :history = "Created: 2023-05-08 13:38:47 UTC" ;
        :Conventions = "COARDS" ;
        :software = "pycurrents" ;
        :hg_changeset = "3211:63370479787a" ;
        :title = "Shipboard ADCP velocity profiles" ;

```



```

:description = "Shipboard ADCP velocity profiles from in2023_v01 using instrument
os75nb - Short Version." ;
:cruise_id = "in2023_v01" ;
:sonar = "os75nb" ;
:yearbase = 2023 ;
:ship_name = "RV Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-
user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time          Time at the end of the ensemble, days from start of year.\n",
    "lon, lat      Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v           Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship  Zonal and meridional velocity components of the ship.\n",
    "heading       Mean ship heading during the ensemble.\n",
    "depth         Bin centers in nominal meters (no sound speed profile
correction).\n",
    "tr_temp      ADCP transducer temperature.\n",
    "pg           Percent Good pings for u, v averaging after editing.\n",
    "pflag        Profile Flags based on editing, used to mask u, v.\n",
    "amp          Received signal strength in ADCP-specific units; no
correction\n",
    "             for spreading or attenuation.\n",
    "=====\n",
    "\n",
    " ;
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "=====\n",
    "\n",
    "Overview\n",
    "-----\n",
    "The CODAS database is a specialized storage format designed for\n",
    "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
    "averaged shipboard ADCP velocities and other variables, during the\n",
    "stages of data processing. The CODAS database stores velocity\n",
    "profiles relative to the ship as east and north components along with\n",
    "position, ship speed, heading, and other variables. The netCDF *short*\n",
    "form contains ocean velocities relative to earth, time, position,\n",
    "transducer temperature, and ship heading; these are designed to be\n",
    "\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
    "the entire CODAS database. Some variables are no longer used, and all\n",
    "have names derived from their original CODAS names, dating back to the\n",
    "late 1980's.\n",

```

"\n",
 "Post-processing\n",
 "-----\n",
 "CODAS post-processing, i.e. that which occurs after the single-ping\n",
 "profiles have been vector-averaged and loaded into the CODAS database,\n",
 "includes editing (using automated algorithms and manual tools),\n",
 "rotation and scaling of the measured velocities, and application of a\n",
 "time-varying heading correction. Additional algorithms developed more\n",
 "recently include translation of the GPS positions to the transducer\n",
 "location, and averaging of ship's speed over the times of valid pings\n",
 "when Percent Good is reduced. Such post-processing is needed prior to\n",
 "submission of \"processed ADCP data\" to JASADCP or other archives.\n",
 "\n",
 "Full CODAS processing\n",
 "-----\n",
 "Whenever single-ping data have been recorded, full CODAS processing\n",
 "provides the best end product.\n",
 "\n",
 "Full CODAS processing starts with the single-ping velocities in beam\n",
 "coordinates. Based on the transducer orientation relative to the\n",
 "hull, the beam velocities are transformed to horizontal, vertical, and\n",
 "\"error velocity\" components. Using a reliable heading (typically from\n",
 "the ship's gyro compass), the velocities in ship coordinates are\n",
 "rotated into earth coordinates.\n",
 "\n",
 "Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
 "and undergo a suite of automated editing algorithms (removal of\n",
 "acoustic interference; identification of the bottom; editing based on\n",
 "thresholds; and specialized editing that targets CTD wire interference\n",
 "and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
 "is then averaged using an iterative reference layer averaging scheme.\n",
 "Each ensemble is approximated as a single function of depth, with a\n",
 "zero-average over a reference layer plus a reference layer velocity\n",
 "for each ping. Adding the average of the single-ping reference layer\n",
 "velocities to the function of depth yields the ensemble-average\n",
 "velocity profile. These averaged profiles, along with ancillary\n",
 "measurements, are written to disk, and subsequently loaded into the\n",
 "CODAS database. Everything after this stage is \"post-processing\".\n",
 "\n",
 "note (time):\n",
 "-----\n",
 "Time is stored in the database using UTC Year, Month, Day, Hour,\n",
 "Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
 "point interval in days since the start of the year, usually the year\n",
 "of the first day of the cruise.\n",
 "\n",
 "\n",
 "note (heading):\n",

```

"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"    positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction(ANCIL2_watrk_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to  $(u+i*v)*(exp(i*theta))$  where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrk_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrk_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value     bottom   Good      bin\n",
"-----+-----+-----+-----+-----+\n",

```

```

"000      0\n",
"001      1                      bad\n",
"010      2                      bad\n",
"011      3                      bad    bad\n",
"100      4      bad\n",
"101      5      bad                      bad\n",
"110      6      bad    bad\n",
"111      7      bad    bad    bad\n",
"-----+-----+-----+-----+-----+\n",
"" ;
}

```

```

netcdf IN2023_V01_ADCP_os150nb {
dimensions:
    time = 9768 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2023-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 24.2824652777778 ;
        time:data_max = 59.7946643518518 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees_east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 64.0246333333333 ;
        lon:data_max = 147.511966666667 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees_north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -65.8926083333333 ;
        lat:data_max = -31.9421166666667 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
        depth:units = "meter" ;
        depth:C_format = "%8.2f" ;

```

```

depth:positive = "down" ;
depth:data_min = 21.93f ;
depth:data_max = 493.99f ;
float u(time, depth_cell) ;
u:missing_value = 1.e+38f ;
u:long_name = "Zonal velocity component" ;
u:units = "meter second-1" ;
u:C_format = "%7.2f" ;
u:data_min = -0.6662581f ;
u:data_max = 0.7851539f ;
float v(time, depth_cell) ;
v:missing_value = 1.e+38f ;
v:long_name = "Meridional velocity component" ;
v:units = "meter second-1" ;
v:C_format = "%7.2f" ;
v:data_min = -0.9460311f ;
v:data_max = 0.6860332f ;
short amp(time, depth_cell) ;
amp:missing_value = 32767s ;
amp:long_name = "Received signal strength" ;
amp:C_format = "%d" ;
amp:data_min = 21s ;
amp:data_max = 227s ;
byte pg(time, depth_cell) ;
pg:missing_value = -1b ;
pg:long_name = "Percent good pings" ;
pg:C_format = "%d" ;
pg:data_min = 0b ;
pg:data_max = 100b ;
byte pflag(time, depth_cell) ;
pflag:long_name = "Editing flags" ;
pflag:C_format = "%d" ;
pflag:data_min = 0b ;
pflag:data_max = 6b ;
float heading(time) ;
heading:missing_value = 1.e+38f ;
heading:long_name = "Ship heading" ;
heading:units = "degrees" ;
heading:C_format = "%6.1f" ;
heading:data_min = -179.8625f ;
heading:data_max = 179.9242f ;
float tr_temp(time) ;
tr_temp:missing_value = 1.e+38f ;
tr_temp:long_name = "ADCP transducer temperature" ;
tr_temp:units = "Celsius" ;
tr_temp:C_format = "%4.1f" ;
tr_temp:data_min = 0.2905284f ;
tr_temp:data_max = 21.98992f ;

```

```

short num_pings(time) ;
    num_pings:long_name = "Number of pings averaged per ensemble" ;
    num_pings:units = "None" ;
    num_pings:C_format = "%d" ;
    num_pings:data_min = 19s ;
    num_pings:data_max = 248s ;

float uship(time) ;
    uship:missing_value = 1.e+38f ;
    uship:long_name = "Ship zonal velocity component" ;
    uship:units = "meter second-1" ;
    uship:C_format = "%9.4f" ;
    uship:data_min = -167.4234f ;
    uship:data_max = 52.18583f ;

float vship(time) ;
    vship:missing_value = 1.e+38f ;
    vship:long_name = "Ship meridional velocity component" ;
    vship:units = "meter second-1" ;
    vship:C_format = "%9.4f" ;
    vship:data_min = -43.92641f ;
    vship:data_max = 18.01083f ;

// global attributes:
    :featureType = "trajectoryProfile" ;
    :history = "Created: 2023-05-08 13:39:43 UTC" ;
    :Conventions = "COARDS" ;
    :software = "pycurrents" ;
    :hg_changeset = "3211:63370479787a" ;
    :title = "Shipboard ADCP velocity profiles" ;
    :description = "Shipboard ADCP velocity profiles from in2023_v01 using instrument
os150nb - Short Version." ;
    :cruise_id = "in2023_v01" ;
    :sonar = "os150nb" ;
    :yearbase = 2023 ;
    :ship_name = "RV Investigator" ;
    :CODAS_variables = "\n",
        "Variables in this CODAS short-form Netcdf file are intended for most end-
user\n",
        "scientific analysis and display purposes. For additional information see\n",
        "the CODAS_processing_note global attribute and the attributes of each\n",
        "of the variables.\n",
        "\n",
        "\n",
        "=====\n",
        "time          Time at the end of the ensemble, days from start of year.\n",
        "lon, lat      Longitude, Latitude from GPS at the end of the ensemble.\n",
        "u,v           Ocean zonal and meridional velocity component profiles.\n",
        "uship, vship  Zonal and meridional velocity components of the ship.\n",
        "heading       Mean ship heading during the ensemble.\n",

```

```

correction).\n",
    "depth          Bin centers in nominal meters (no sound speed profile
    "tr_temp        ADCP transducer temperature.\n",
    "pg             Percent Good pings for u, v averaging after editing.\n",
    "pflag          Profile Flags based on editing, used to mask u, v.\n",
    "amp            Received signal strength in ADCP-specific units; no
correction\n",
    "                for spreading or attenuation.\n",
    "===== \n",
    "\n",
    " ";
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "===== \n",
    "\n",
    "Overview\n",
    "-----\n",
    "The CODAS database is a specialized storage format designed for\n",
    "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
    "averaged shipboard ADCP velocities and other variables, during the\n",
    "stages of data processing. The CODAS database stores velocity\n",
    "profiles relative to the ship as east and north components along with\n",
    "position, ship speed, heading, and other variables. The netCDF *short*\n",
    "form contains ocean velocities relative to earth, time, position,\n",
    "transducer temperature, and ship heading; these are designed to be\n",
    "\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
    "the entire CODAS database. Some variables are no longer used, and all\n",
    "have names derived from their original CODAS names, dating back to the\n",
    "late 1980's.\n",
    "\n",
    "Post-processing\n",
    "-----\n",
    "CODAS post-processing, i.e. that which occurs after the single-ping\n",
    "profiles have been vector-averaged and loaded into the CODAS database,\n",
    "includes editing (using automated algorithms and manual tools),\n",
    "rotation and scaling of the measured velocities, and application of a\n",
    "time-varying heading correction. Additional algorithms developed more\n",
    "recently include translation of the GPS positions to the transducer\n",
    "location, and averaging of ship's speed over the times of valid pings\n",
    "when Percent Good is reduced. Such post-processing is needed prior to\n",
    "submission of \"processed ADCP data\" to JASADCP or other archives.\n",
    "\n",
    "Full CODAS processing\n",
    "-----\n",
    "Whenever single-ping data have been recorded, full CODAS processing\n",
    "provides the best end product.\n",
    "\n",
    "Full CODAS processing starts with the single-ping velocities in beam\n",

```

"coordinates. Based on the transducer orientation relative to the\n",
 "hull, the beam velocities are transformed to horizontal, vertical, and\n",
 "\"error velocity\" components. Using a reliable heading (typically from\n",
 "the ship's gyro compass), the velocities in ship coordinates are\n",
 "rotated into earth coordinates.\n",
 "\n",
 "Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
 "and undergo a suite of automated editing algorithms (removal of\n",
 "acoustic interference; identification of the bottom; editing based on\n",
 "thresholds; and specialized editing that targets CTD wire interference\n",
 "and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
 "is then averaged using an iterative reference layer averaging scheme.\n",
 "Each ensemble is approximated as a single function of depth, with a\n",
 "zero-average over a reference layer plus a reference layer velocity\n",
 "for each ping. Adding the average of the single-ping reference layer\n",
 "velocities to the function of depth yields the ensemble-average\n",
 "velocity profile. These averaged profiles, along with ancillary\n",
 "measurements, are written to disk, and subsequently loaded into the\n",
 "CODAS database. Everything after this stage is \"post-processing\".\n",
 "\n",
 "note (time):\n",
 "-----\n",
 "Time is stored in the database using UTC Year, Month, Day, Hour,\n",
 "Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
 "point interval in days since the start of the year, usually the year\n",
 "of the first day of the cruise.\n",
 "\n",
 "\n",
 "note (heading):\n",
 "-----\n",
 "CODAS processing uses heading from a reliable device, and (if\n",
 "available) uses a time-dependent correction by an accurate heading\n",
 "device. The reliable heading device is typically a gyro compass (for\n",
 "example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
 "Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
 "varies with the technology of the time. It is always confusing to\n",
 "keep track of the sign of the heading correction. Headings are written\n",
 "degrees, positive clockwise. setting up some variables:\n",
 "\n",
 "X = transducer angle (CONFIG1_heading_bias)\n",
 " positive clockwise (beam 3 angle relative to ship)\n",
 "G = Reliable heading (gyrocompass)\n",
 "A = Accurate heading\n",
 "dh = G - A = time-dependent heading correction(ANCIL2_watr_k_hd_misalign)\n",
 "\n",
 "Rotation of the measured velocities into the correct coordinate system\n",
 "amounts to $(u+i*v)*(exp(i*theta))$ where theta is the sum of the\n",
 "corrected heading and the transducer angle.\n",


```

"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrck_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrck_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value     bottom   Good      bin\n",
"-----+-----+-----+-----+-----+\n",
"000        0\n",
"001        1                               bad\n",
"010        2                               bad\n",
"011        3                               bad      bad\n",
"100        4          bad\n",
"101        5          bad                               bad\n",
"110        6          bad      bad\n",
"111        7          bad      bad      bad\n",
"-----+-----+-----+-----+-----+\n",
"" ;
}

```

4 References

Alix Post (2023). The RV Investigator. *Voyage Plan* IN2023_V01. Retrieved from Marine National Facility: Voyage Plans and summaries: https://www.marine.csiro.au/data/reporting/get_file.cfm?eov_pub_id=2545

Hummon, J. (2009-2021). *CODAS+UHDAS Documentation*. Retrieved February 1, 2023, from https://currents.soest.hawaii.edu/docs/adcp_doc

As Australia's national science agency and innovation catalyst, CSIRO is solving the greatest challenges through innovative science and technology.

CSIRO. Unlocking a better future for everyone.

Contact us

1300 363 400
+61 3 9545 2176
www.csiro.au/contact
www.csiro.au

For further information

National Collections and Marine Infrastructure
Information and Data Centre
HF-Data-Requests@csiro.au
research.csiro.au/ncmi-idc
www.csiro.au/en/about/people/business-units/NCMI

