



Operated by CSIRO,
Australia's National Science Agency,
on behalf of the nation

RV *Investigator* ADCP Data Processing Report

Voyage ID	IN2024_V02
Voyage Title	SOTS: Southern Ocean Time Series automated moorings for climate and carbon cycle studies southwest of Tasmania.
Depart	Hobart, 0900 Sunday 31 st March 2024 AEST
Return	Hobart, 0830 Friday 19 th April 2024 AEST
Chief Scientist	Dr Elizabeth Shadwick (CSIRO)
Data Processor	Vito Dirita (CSIRO – E&T Data Acquisition & Processing)

Document History

Date	Version	Author	Comments
12 June 2024	1.0	Vito Dirita	Initial version
10 March 2026	1.1	Vito Dirita	Final Version

Contents

1	Summary.....	3
1.1	Voyage Track	4
2	Data Processing.....	4
2.1	Background Information.....	4
2.2	Processing Notes	4
3	NetCDF Data Headers	6
4	References	17

1 Summary

The Southern Ocean has a predominant role in the movement of heat and carbon dioxide into the ocean's interior moderating Earth's average surface climate. The IMOS SOTS sub-facility uses a set of two automated moorings to measure these processes under extreme conditions, where they are most intense and have been least studied. The atmosphere-ocean exchanges occur on many timescales, from daily insolation cycles to ocean basin decadal oscillations and thus high frequency observations sustained over many years are required. The current context of anthropogenic forcing of rapid climate change adds urgency to the work.

This report describes the production of quality-controlled ADCP data from RV *Investigator* voyage IN2024_V02.

Overall Data Quality:

ADCPs were switched off during EK80 surveying of Patience Seamount and moorings sites to reduce signal interference during operations. On the 14th of April, the WH75 stopped logging due to checksum errors. Recording was restarted and it resumed logging, however checksum errors continued until it stopped logging again. It was suspected that water ingress had affected the instrument as had previously occurred during IN2024_V01, so the instrument was disconnected from power as a safety precaution.

No issues were reported for the OS150.

ADCP data were collected using the University of Hawaii Data Acquisition System (UHDAS) and post-processed using the Common Ocean Data Access System (CODAS). Documentation for these systems can be found in (Hummon, 2009-2021).

The RDI Ocean Surveyor OS150 and OS75 were run in narrowband mode (nb), the WH75 in broadband mode.

Internal triggering was used.

Both port and starboard drop keels are located approximately 6m below the water line, additionally the port drop keel was extended by 2.0m for the entire duration of the voyage, subsequently the port keel transducer was located approximately 8.0m below the water line.

To access the full voyage plan and other reports and data associated with this voyage, please see the contact information at the end of this report.

1.1 Voyage Track

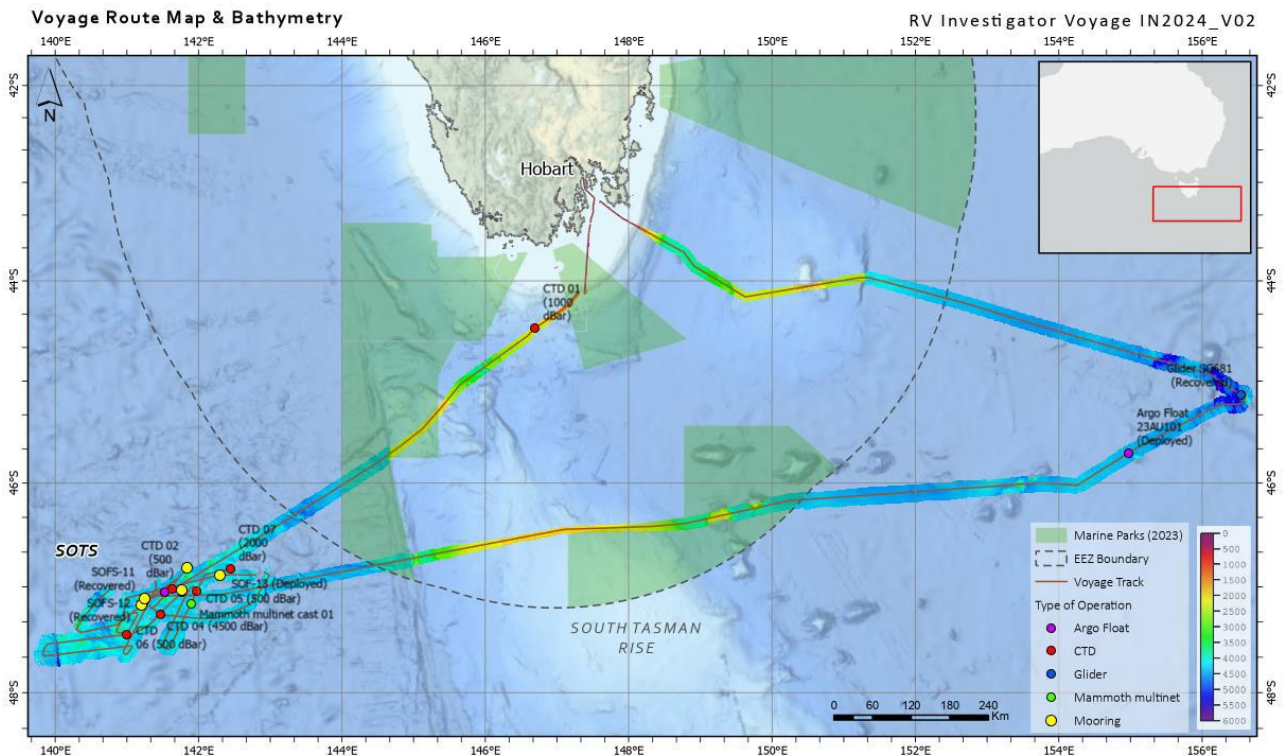


Figure 1: Voyage track

Please see the webpy folders for plots of collected data.

2 Data Processing

2.1 Background Information

The University of Hawaii's CODAS software (Built 2021-10-20) contained in their "focal_20.04" Oracle VM Virtual Machine (VirtualBox) image was used for data post-processing.

2.2 Processing Notes

Only minor editing was required, data were masked where instrument anomalies were suspected and where the OS75, WH75 and OS150 data differed significantly. A heading correction was applied to both ADCPs using `patch_hcorr.py` using water track calibration on both OS75nb and WH75, bottom track calibration was used for the OS150nb. Heading correction values are provided in Tables 1 and 2 below, serial numbers in table 3.

Amplitude and phase corrections Applied:

OS75nb		OS150nb		WH75	
Amplitude	Phase	Amplitude	Phase	Amplitude	Phase
1.0060	0.0270	1.0045	-0.0738	1.0070	-0.0750

Table 1: Amplitude and phase rotation corrections applied

Final amplitude and phase rotations after correction: (median values)

	OS75nb		OS150nb		WH75	
	Amplitude	Phase	Amplitude	Phase	Amplitude	Phase
WaterTrack	1.0000	-0.0030	1.0045	-0.0325	1.0000	-0.0080
BottomTrack	N/A	N/A	1.0000	-0.0022	N/A	N/A

Table 2A: Final amplitude and phase – median values

Final amplitude and phase rotations after correction: (mean values)

	OS75nb		OS150nb		WH75	
	Amplitude	Phase	Amplitude	Phase	Amplitude	Phase
WaterTrack	0.9990	0.0153	1.0037	-0.0794	0.9992	0.0955
BottomTrack	N/A	N/A	0.9999	0.0067	N/A	N/A

Table 2B: Final amplitude and phase – mean values

Instrument Serial Numbers

Manufacturer	Instrument	Serial Number
TRDI	ADCP 75 kHz	65008
TRDI	ADCP WH75	
TRDI	ADCP 150 kHz	61315

Table 3: ADCP serial numbers

3 NetCDF Data Headers

os75nb

```

codaspy:(os75nb)$ ncdump -h in2024_v02_os75nb.nc
netcdf in2024_v02_os75nb {
dimensions:
    time = 824 ;
    depth_cell = 55 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2024-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 105.178784722222 ;
        time:data_max = 108.036423611111 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees_east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 148.103288888889 ;
        lon:data_max = 156.607133333333 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees_north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -46.0154666666667 ;
        lat:data_max = -43.4362722222222 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
        depth:units = "meter" ;
        depth:C_format = "%8.2f" ;
        depth:positive = "down" ;
        depth:data_min = 29.93f ;
        depth:data_max = 893.99f ;
    float u(time, depth_cell) ;
        u:missing_value = 1.e+38f ;
        u:long_name = "Zonal velocity component" ;
        u:units = "meter second-1" ;
        u:C_format = "%7.2f" ;
        u:data_min = -1.873417f ;
        u:data_max = 0.8908956f ;
    float v(time, depth_cell) ;
        v:missing_value = 1.e+38f ;
        v:long_name = "Meridional velocity component" ;

```

```

v:units = "meter second-1" ;
v:C_format = "%.2f" ;
v:data_min = -0.5993927f ;
v:data_max = 0.7280772f ;
short amp(time, depth_cell) ;
amp:missing_value = 32767s ;
amp:long_name = "Received signal strength" ;
amp:C_format = "%d" ;
amp:data_min = 7s ;
amp:data_max = 152s ;
byte pg(time, depth_cell) ;
pg:missing_value = -1b ;
pg:long_name = "Percent good pings" ;
pg:C_format = "%d" ;
pg:data_min = 0b ;
pg:data_max = 100b ;
byte pflag(time, depth_cell) ;
pflag:long_name = "Editing flags" ;
pflag:C_format = "%d" ;
pflag:data_min = 0b ;
pflag:data_max = 6b ;
float heading(time) ;
heading:missing_value = 1.e+38f ;
heading:long_name = "Ship heading" ;
heading:units = "degrees" ;
heading:C_format = "%.1f" ;
heading:data_min = -153.9641f ;
heading:data_max = 96.1158f ;
float tr_temp(time) ;
tr_temp:missing_value = 1.e+38f ;
tr_temp:long_name = "ADCP transducer temperature" ;
tr_temp:units = "Celsius" ;
tr_temp:C_format = "%.1f" ;
tr_temp:data_min = 12.60266f ;
tr_temp:data_max = 19.36524f ;
short num_pings(time) ;
num_pings:long_name = "Number of pings averaged per ensemble" ;
num_pings:units = "None" ;
num_pings:C_format = "%d" ;
num_pings:data_min = 143s ;
num_pings:data_max = 144s ;
float uship(time) ;
uship:missing_value = 1.e+38f ;
uship:long_name = "Ship zonal velocity component" ;
uship:units = "meter second-1" ;
uship:C_format = "%.4f" ;
uship:data_min = -5.197617f ;
uship:data_max = 5.641986f ;
float vship(time) ;
vship:missing_value = 1.e+38f ;
vship:long_name = "Ship meridional velocity component" ;
vship:units = "meter second-1" ;
vship:C_format = "%.4f" ;
vship:data_min = -3.143935f ;
vship:data_max = 5.617278f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2024-06-11 06:49:12 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "3211:63370479787a" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2024_v02 using instrument os75nb - Short
Version." ;
:cruise_id = "in2024_v02" ;
:sonar = "os75nb" ;
:yearbase = 2024 ;
:ship_name = "RV_Investigator" ;
:CODAS_variables = "\n",
"Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
"scientific analysis and display purposes. For additional information see\n",
"the CODAS_processing_note global attribute and the attributes of each\n",
"of the variables.\n",
"\n",
"\n",
"=====\n",

```

```

"time          Time at the end of the ensemble, days from start of year.\n",
"lon, lat     Longitude, Latitude from GPS at the end of the ensemble.\n",
"u,v         Ocean zonal and meridional velocity component profiles.\n",
"uship, vship Zonal and meridional velocity components of the ship.\n",
"heading     Mean ship heading during the ensemble.\n",
"depth       Bin centers in nominal meters (no sound speed profile correction).\n",
"tr_temp     ADCP transducer temperature.\n",
"pg          Percent Good pings for u, v averaging after editing.\n",
"pflag       Profile Flags based on editing, used to mask u, v.\n",
"amp         Received signal strength in ADCP-specific units; no correction\n",
             for spreading or attenuation.\n",
"===== \n",
"\n",
";
:CODAS_processing_note = "\n",
"CODAS processing note:\n",
"===== \n",
"\n",
"Overview\n",
"-----\n",
"The CODAS database is a specialized storage format designed for\n",
"shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
"averaged shipboard ADCP velocities and other variables, during the\n",
"stages of data processing. The CODAS database stores velocity\n",
"profiles relative to the ship as east and north components along with\n",
"position, ship speed, heading, and other variables. The netCDF *short*\n",
"form contains ocean velocities relative to earth, time, position,\n",
"transducer temperature, and ship heading; these are designed to be\n",
"\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
"the entire CODAS database. Some variables are no longer used, and all\n",
"have names derived from their original CODAS names, dating back to the\n",
"late 1980's.\n",
"\n",
"Post-processing\n",
"-----\n",
"CODAS post-processing, i.e. that which occurs after the single-ping\n",
"profiles have been vector-averaged and loaded into the CODAS database,\n",
"includes editing (using automated algorithms and manual tools),\n",
"rotation and scaling of the measured velocities, and application of a\n",
"time-varying heading correction. Additional algorithms developed more\n",
"recently include translation of the GPS positions to the transducer\n",
"location, and averaging of ship's speed over the times of valid pings\n",
"when Percent Good is reduced. Such post-processing is needed prior to\n",
"submission of \"processed ADCP data\" to JASADCP or other archives.\n",
"\n",
"Full CODAS processing\n",
"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"hull, the beam velocities are transformed to horizontal, vertical, and\n",
"\"error velocity\" components. Using a reliable heading (typically from\n",
"the ship's gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",

```

```

"\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"    positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrk_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to (u+i*v)*(exp(i*theta)) where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrk_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrk_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value     bottom   Good      bin\n",
"-----+-----+-----+-----+\n",
"000        0\n",
"001        1                bad\n",
"010        2                bad\n",
"011        3                bad\n",
"100        4                bad\n",
"101        5                bad\n",
"110        6                bad\n",
"111        7                bad\n",
"-----+-----+-----+-----+\n",
"" ;
}

```

os150nb

```

codaspy:(os150nb)$ ncdump -h in2024_v02_os150nb.nc
netcdf in2024_v02_os150nb {
dimensions:
    time = 4734 ;
    depth_cell = 60 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2024-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;

```

```

time:standard_name = "time" ;
time:data_min = 89.9443402777778 ;
time:data_max = 108.124027777778 ;
double lon(time) ;
lon:missing_value = 1.e+38 ;
lon:long_name = "Longitude" ;
lon:units = "degrees_east" ;
lon:C_format = "%9.4f" ;
lon:standard_name = "longitude" ;
lon:data_min = 139.828816666667 ;
lon:data_max = 156.607063888889 ;
double lat(time) ;
lat:missing_value = 1.e+38 ;
lat:long_name = "Latitude" ;
lat:units = "degrees_north" ;
lat:C_format = "%9.4f" ;
lat:standard_name = "latitude" ;
lat:data_min = -47.6495222222222 ;
lat:data_max = -42.9536 ;
float depth(time, depth_cell) ;
depth:missing_value = 1.e+38f ;
depth:long_name = "Depth" ;
depth:units = "meter" ;
depth:C_format = "%8.2f" ;
depth:positive = "down" ;
depth:data_min = 17.94f ;
depth:data_max = 489.99f ;
float u(time, depth_cell) ;
u:missing_value = 1.e+38f ;
u:long_name = "Zonal velocity component" ;
u:units = "meter second-1" ;
u:C_format = "%7.2f" ;
u:data_min = -0.9705999f ;
u:data_max = 0.7119555f ;
float v(time, depth_cell) ;
v:missing_value = 1.e+38f ;
v:long_name = "Meridional velocity component" ;
v:units = "meter second-1" ;
v:C_format = "%7.2f" ;
v:data_min = -0.8148676f ;
v:data_max = 0.9459698f ;
short amp(time, depth_cell) ;
amp:missing_value = 32767s ;
amp:long_name = "Received signal strength" ;
amp:C_format = "%d" ;
amp:data_min = 24s ;
amp:data_max = 229s ;
byte pg(time, depth_cell) ;
pg:missing_value = -1b ;
pg:long_name = "Percent good pings" ;
pg:C_format = "%d" ;
pg:data_min = 0b ;
pg:data_max = 100b ;
byte pflag(time, depth_cell) ;
pflag:long_name = "Editing flags" ;
pflag:C_format = "%d" ;
pflag:data_min = 0b ;
pflag:data_max = 6b ;
float heading(time) ;
heading:missing_value = 1.e+38f ;
heading:long_name = "Ship heading" ;
heading:units = "degrees" ;
heading:C_format = "%6.1f" ;
heading:data_min = -177.7242f ;
heading:data_max = 179.8359f ;
float tr_temp(time) ;
tr_temp:missing_value = 1.e+38f ;
tr_temp:long_name = "ADCP transducer temperature" ;
tr_temp:units = "Celsius" ;
tr_temp:C_format = "%4.1f" ;
tr_temp:data_min = 10.16133f ;
tr_temp:data_max = 19.21792f ;
short num_pings(time) ;
num_pings:long_name = "Number of pings averaged per ensemble" ;
num_pings:units = "None" ;
num_pings:C_format = "%d" ;
num_pings:data_min = 15s ;

```

```

    num_pings:data_max = 251s ;
float uship(time) ;
    uship:missing_value = 1.e+38f ;
    uship:long_name = "Ship zonal velocity component" ;
    uship:units = "meter second-1" ;
    uship:C_format = "%9.4f" ;
    uship:data_min = -5.198639f ;
    uship:data_max = 6.401823f ;
float vship(time) ;
    vship:missing_value = 1.e+38f ;
    vship:long_name = "Ship meridional velocity component" ;
    vship:units = "meter second-1" ;
    vship:C_format = "%9.4f" ;
    vship:data_min = -5.756001f ;
    vship:data_max = 5.595949f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2024-06-11 06:46:45 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "3211:63370479787a" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2024_v02 using instrument os150nb - Short
Version." ;

:cruise_id = "in2024_v02" ;
:sonar = "os150nb" ;
:yearbase = 2024 ;
:ship_name = "RV_Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time          Time at the end of the ensemble, days from start of year.\n",
    "lon, lat      Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v          Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship  Zonal and meridional velocity components of the ship.\n",
    "heading       Mean ship heading during the ensemble.\n",
    "depth        Bin centers in nominal meters (no sound speed profile correction).\n",
    "tr_temp      ADCP transducer temperature.\n",
    "pg           Percent Good pings for u, v averaging after editing.\n",
    "pflag        Profile Flags based on editing, used to mask u, v.\n",
    "amp          Received signal strength in ADCP-specific units; no correction\n",
    "             for spreading or attenuation.\n",
    "=====\n",
    "\n",
    "" ;
:CODAS_processing_note = "\n",
    "CODAS processing note:\n",
    "=====\n",
    "\n",
    "Overview\n",
    "-----\n",
    "The CODAS database is a specialized storage format designed for\n",
    "shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
    "averaged shipboard ADCP velocities and other variables, during the\n",
    "stages of data processing. The CODAS database stores velocity\n",
    "profiles relative to the ship as east and north components along with\n",
    "position, ship speed, heading, and other variables. The netCDF *short*\n",
    "form contains ocean velocities relative to earth, time, position,\n",
    "transducer temperature, and ship heading; these are designed to be\n",
    "\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
    "the entire CODAS database. Some variables are no longer used, and all\n",
    "have names derived from their original CODAS names, dating back to the\n",
    "late 1980's.\n",
    "\n",
    "Post-processing\n",
    "-----\n",
    "CODAS post-processing, i.e. that which occurs after the single-ping\n",
    "profiles have been vector-averaged and loaded into the CODAS database,\n",
    "includes editing (using automated algorithms and manual tools),\n",
    "rotation and scaling of the measured velocities, and application of a\n",
    "time-varying heading correction. Additional algorithms developed more\n",

```

```

"recently include translation of the GPS positions to the transducer\n",
"location, and averaging of ship's speed over the times of valid pings\n",
"when Percent Good is reduced. Such post-processing is needed prior to\n",
"submission of \"processed ADCP data\" to JASADCP or other archives.\n",
"\n",
"Full CODAS processing\n",
"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"haul, the beam velocities are transformed to horizontal, vertical, and\n",
"\"error velocity\" components. Using a reliable heading (typically from\n",
"the ship's gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"\n",
"note (heading):\n",
"-----\n",
"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"   positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrk_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to  $(u+iv) \cdot (\exp(i \cdot \theta))$  where  $\theta$  is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
" $\theta = X + (G - dh) = X + G - dh$ \n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then  $R=0.5$ ). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrk_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",

```

```

"ANCIL2_watrk_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary    decimal    below    Percent\n",
"value     value     bottom   Good      bin\n",
"-----+-----+-----+-----+\n",
"000       0\n",
"001       1                               bad\n",
"010       2                               bad\n",
"011       3                               bad\n",
"100       4          bad\n",
"101       5          bad                               bad\n",
"110       6          bad          bad\n",
"111       7          bad          bad          bad\n",
"-----+-----+-----+-----+\n",
"" ;
}

```

WH75

```

codaspy:(wh75)$ ncdump -h in2024_v02_wh75bb.nc
netcdf in2024_v02_wh75bb {
dimensions:
    time = 3556 ;
    depth_cell = 100 ;
variables:
    int trajectory ;
        trajectory:standard_name = "trajectory_id" ;
    double time(time) ;
        time:long_name = "Decimal day" ;
        time:units = "days since 2024-01-01 00:00:00" ;
        time:C_format = "%12.5f" ;
        time:standard_name = "time" ;
        time:data_min = 90.7492939814815 ;
        time:data_max = 104.446597222222 ;
    double lon(time) ;
        lon:missing_value = 1.e+38 ;
        lon:long_name = "Longitude" ;
        lon:units = "degrees_east" ;
        lon:C_format = "%9.4f" ;
        lon:standard_name = "longitude" ;
        lon:data_min = 139.828825 ;
        lon:data_max = 149.144744444444 ;
    double lat(time) ;
        lat:missing_value = 1.e+38 ;
        lat:long_name = "Latitude" ;
        lat:units = "degrees_north" ;
        lat:C_format = "%9.4f" ;
        lat:standard_name = "latitude" ;
        lat:data_min = -47.6495027777778 ;
        lat:data_max = -44.3839777777778 ;
    float depth(time, depth_cell) ;
        depth:missing_value = 1.e+38f ;
        depth:long_name = "Depth" ;
        depth:units = "meter" ;
        depth:C_format = "%8.2f" ;
        depth:positive = "down" ;
        depth:data_min = 22.27f ;
        depth:data_max = 814.34f ;
    float u(time, depth_cell) ;
        u:missing_value = 1.e+38f ;
        u:long_name = "Zonal velocity component" ;
        u:units = "meter second-1" ;
        u:C_format = "%7.2f" ;
        u:data_min = -0.5501952f ;
        u:data_max = 0.7495317f ;
    float v(time, depth_cell) ;
        v:missing_value = 1.e+38f ;
        v:long_name = "Meridional velocity component" ;
        v:units = "meter second-1" ;
        v:C_format = "%7.2f" ;
        v:data_min = -0.5939312f ;
        v:data_max = 1.004213f ;
}

```

```

short amp(time, depth_cell) ;
    amp:missing_value = 32767s ;
    amp:long_name = "Received signal strength" ;
    amp:C_format = "%d" ;
    amp:data_min = 33s ;
    amp:data_max = 206s ;
byte pg(time, depth_cell) ;
    pg:missing_value = -1b ;
    pg:long_name = "Percent good pings" ;
    pg:C_format = "%d" ;
    pg:data_min = 0b ;
    pg:data_max = 100b ;
byte pflag(time, depth_cell) ;
    pflag:long_name = "Editing flags" ;
    pflag:C_format = "%d" ;
    pflag:data_min = 0b ;
    pflag:data_max = 6b ;
float heading(time) ;
    heading:missing_value = 1.e+38f ;
    heading:long_name = "Ship heading" ;
    heading:units = "degrees" ;
    heading:C_format = "%6.1f" ;
    heading:data_min = -175.4541f ;
    heading:data_max = 179.8318f ;
float tr_temp(time) ;
    tr_temp:missing_value = 1.e+38f ;
    tr_temp:long_name = "ADCP transducer temperature" ;
    tr_temp:units = "Celsius" ;
    tr_temp:C_format = "%4.1f" ;
    tr_temp:data_min = 9.815819f ;
    tr_temp:data_max = 18.13119f ;
short num_pings(time) ;
    num_pings:long_name = "Number of pings averaged per ensemble" ;
    num_pings:units = "None" ;
    num_pings:C_format = "%d" ;
    num_pings:data_min = 10s ;
    num_pings:data_max = 178s ;
float uship(time) ;
    uship:missing_value = 1.e+38f ;
    uship:long_name = "Ship zonal velocity component" ;
    uship:units = "meter second-1" ;
    uship:C_format = "%9.4f" ;
    uship:data_min = -5.043063f ;
    uship:data_max = 6.392015f ;
float vship(time) ;
    vship:missing_value = 1.e+38f ;
    vship:long_name = "Ship meridional velocity component" ;
    vship:units = "meter second-1" ;
    vship:C_format = "%9.4f" ;
    vship:data_min = -4.996851f ;
    vship:data_max = 5.414852f ;

// global attributes:
:featureType = "trajectoryProfile" ;
:history = "Created: 2024-06-11 06:50:45 UTC" ;
:Conventions = "COARDS" ;
:software = "pycurrents" ;
:hg_changeset = "3211:63370479787a" ;
:title = "Shipboard ADCP velocity profiles" ;
:description = "Shipboard ADCP velocity profiles from in2024_v02 using instrument wh75bb - Short
Version." ;
:cruise_id = "in2024_v02" ;
:sonar = "wh75bb" ;
:yearbase = 2024 ;
:ship_name = "RV_Investigator" ;
:CODAS_variables = "\n",
    "Variables in this CODAS short-form Netcdf file are intended for most end-user\n",
    "scientific analysis and display purposes. For additional information see\n",
    "the CODAS_processing_note global attribute and the attributes of each\n",
    "of the variables.\n",
    "\n",
    "\n",
    "=====\n",
    "time      Time at the end of the ensemble, days from start of year.\n",
    "lon, lat  Longitude, Latitude from GPS at the end of the ensemble.\n",
    "u,v       Ocean zonal and meridional velocity component profiles.\n",
    "uship, vship  Zonal and meridional velocity components of the ship.\n",

```

```

"heading      Mean ship heading during the ensemble.\n",
"depth        Bin centers in nominal meters (no sound speed profile correction).\n",
"tr_temp      ADCP transducer temperature.\n",
"pg           Percent Good pings for u, v averaging after editing.\n",
"pflag        Profile Flags based on editing, used to mask u, v.\n",
"amp          Received signal strength in ADCP-specific units; no correction\n",
"             for spreading or attenuation.\n",
"===== \n",
"\n",
" ;
:CODAS_processing_note = "\n",
"CODAS processing note:\n",
"===== \n",
"\n",
"Overview\n",
"-----\n",
"The CODAS database is a specialized storage format designed for\n",
"shipboard ADCP data. \"CODAS processing\" uses this format to hold\n",
"averaged shipboard ADCP velocities and other variables, during the\n",
"stages of data processing. The CODAS database stores velocity\n",
"profiles relative to the ship as east and north components along with\n",
"position, ship speed, heading, and other variables. The netCDF *short*\n",
"form contains ocean velocities relative to earth, time, position,\n",
"transducer temperature, and ship heading; these are designed to be\n",
"\"ready for immediate use\". The netCDF *long* form is just a dump of\n",
"the entire CODAS database. Some variables are no longer used, and all\n",
"have names derived from their original CODAS names, dating back to the\n",
"late 1980's.\n",
"\n",
"Post-processing\n",
"-----\n",
"CODAS post-processing, i.e. that which occurs after the single-ping\n",
"profiles have been vector-averaged and loaded into the CODAS database,\n",
"includes editing (using automated algorithms and manual tools),\n",
"rotation and scaling of the measured velocities, and application of a\n",
"time-varying heading correction. Additional algorithms developed more\n",
"recently include translation of the GPS positions to the transducer\n",
"location, and averaging of ship's speed over the times of valid pings\n",
"when Percent Good is reduced. Such post-processing is needed prior to\n",
"submission of \"processed ADCP data\" to JASADCP or other archives.\n",
"\n",
"Full CODAS processing\n",
"-----\n",
"Whenever single-ping data have been recorded, full CODAS processing\n",
"provides the best end product.\n",
"\n",
"Full CODAS processing starts with the single-ping velocities in beam\n",
"coordinates. Based on the transducer orientation relative to the\n",
"hull, the beam velocities are transformed to horizontal, vertical, and\n",
"\"error velocity\" components. Using a reliable heading (typically from\n",
"the ship's gyro compass), the velocities in ship coordinates are\n",
"rotated into earth coordinates.\n",
"\n",
"Pings are grouped into an \"ensemble\" (usually 2-5 minutes duration)\n",
"and undergo a suite of automated editing algorithms (removal of\n",
"acoustic interference; identification of the bottom; editing based on\n",
"thresholds; and specialized editing that targets CTD wire interference\n",
"and \"weak, biased profiles\". The ensemble of single-ping velocities\n",
"is then averaged using an iterative reference layer averaging scheme.\n",
"Each ensemble is approximated as a single function of depth, with a\n",
"zero-average over a reference layer plus a reference layer velocity\n",
"for each ping. Adding the average of the single-ping reference layer\n",
"velocities to the function of depth yields the ensemble-average\n",
"velocity profile. These averaged profiles, along with ancillary\n",
"measurements, are written to disk, and subsequently loaded into the\n",
"CODAS database. Everything after this stage is \"post-processing\".\n",
"\n",
"note (time):\n",
"-----\n",
"Time is stored in the database using UTC Year, Month, Day, Hour,\n",
"Minute, Seconds. Floating point time \"Decimal Day\" is the floating\n",
"point interval in days since the start of the year, usually the year\n",
"of the first day of the cruise.\n",
"\n",
"\n",
"note (heading):\n",
"-----

```

```

"CODAS processing uses heading from a reliable device, and (if\n",
"available) uses a time-dependent correction by an accurate heading\n",
"device. The reliable heading device is typically a gyro compass (for\n",
"example, the Bridge gyro). Accurate heading devices can be POSMV,\n",
"Seapath, Phins, Hydrins, MAHRS, or various Ashtech devices; this\n",
"varies with the technology of the time. It is always confusing to\n",
"keep track of the sign of the heading correction. Headings are written\n",
"degrees, positive clockwise. setting up some variables:\n",
"\n",
"X = transducer angle (CONFIG1_heading_bias)\n",
"   positive clockwise (beam 3 angle relative to ship)\n",
"G = Reliable heading (gyrocompass)\n",
"A = Accurate heading\n",
"dh = G - A = time-dependent heading correction (ANCIL2_watrk_hd_misalign)\n",
"\n",
"Rotation of the measured velocities into the correct coordinate system\n",
"amounts to (u+i*v)*(exp(i*theta)) where theta is the sum of the\n",
"corrected heading and the transducer angle.\n",
"\n",
"theta = X + (G - dh) = X + G - dh\n",
"\n",
"\n",
"Watertrack and Bottomtrack calibrations give an indication of the\n",
"residual angle offset to apply, for example if mean and median of the\n",
"phase are all 0.5 (then R=0.5). Using the \"rotate\" command,\n",
"the value of R is added to \"ANCIL2_watrk_hd_misalign\".\n",
"\n",
"new_dh = dh + R\n",
"\n",
"Therefore the total angle used in rotation is\n",
"\n",
"new_theta = X + G - dh_new\n",
"           = X + G - (dh + R)\n",
"           = (X - R) + (G - dh)\n",
"\n",
"The new estimate of the transducer angle is: X - R\n",
"ANCIL2_watrk_hd_misalign contains: dh + R\n",
"\n",
"=====\n",
"\n",
"Profile flags\n",
"-----\n",
"Profile editing flags are provided for each depth cell:\n",
"\n",
"binary   decimal   below   Percent\n",
"value    value     bottom  Good      bin\n",
"-----+-----+-----+-----+\n",
"000      0\n",
"001      1                bad\n",
"010      2                bad\n",
"011      3                bad\n",
"100      4          bad\n",
"101      5          bad\n",
"110      6          bad    bad\n",
"111      7          bad    bad\n",
"-----+-----+-----+-----+\n",
"" ;
}

```

4 References

The RV Investigator. *Voyage Plan IN2024_V02*. Retrieved from Marine National Facility: Voyage Plans and summaries:

https://www.csiro.au/en/about/facilities-collections/MNF/Voyages-schedules/Voyages/2024/March/IN2024_V02

Hummon, J. (2009-2021). *CODAS+UHDAS Documentation*. Retrieved February 1, 2023, from https://currents.soest.hawaii.edu/docs/adcp_doc

As Australia's national science agency and innovation catalyst, CSIRO is solving the greatest challenges through innovative science and technology.

CSIRO. Unlocking a better future for everyone.

Contact us

1300 363 400

+61 3 9545 2176

www.csiro.au/contact

www.csiro.au

For further information

National Collections and Marine Infrastructure
Information and Data Centre

HF-Data-Requests@csiro.au

research.csiro.au/ncmi-idc

www.csiro.au/en/about/people/business-units/NCMI