



Operated by CSIRO,
Australia's National Science Agency,
on behalf of the nation

RV *Investigator* Underway Data Processing Report

Voyage ID	IN2025_V05
Voyage Title	Eruption, destruction and seafloor ecosystem recovery – Tonga 2022 eruption of the century
Depart	Hobart, Sunday 10 th August 2025, 10:00 AEST
Return	Brisbane, Wednesday 1 st October 2025, 09:00 AEST
Chief Scientist	Dr Rebecca Carey (UTAS)
Data Processor	Vito Dirita (CSIRO – E&T Data Acquisition & Processing)

Document History

Date	Version	Author	Comments
26 November 2025	1.0	Vito Dirita	Draft Version
5 August 2026	1.1	Vito Dirita	Release Version

Contents

1	Summary.....	3
1.1	Voyage Track	4
2	Data Processing.....	4
2.1	Background Information.....	4
2.2	Completeness and Data Quality	5
2.3	Processing Comments	5
2.4	Final Underway Data	10
2.5	Commonly Used QC Flags.....	11
2.6	Final Distribution Dataset Files.....	11
3	References	12
4	Appendices	13
4.1	TSG Calibration Residuals	13
4.2	File Attributes:	14
4.3	Underway Sensors	15
4.3	Location of Meteorological Instruments.....	20
4.4	Drop Keel Instrumentation Positioning.....	21

1 Summary

The primary scientific objective of this 53-day voyage was to understand eruption and post-eruption magmatic and volcanic processes associated with submarine volcanoes, and the subsequent impacts on the marine biological communities using the 2022 eruption of Hunga Tonga-Hunga Ha'apai (HTHH) volcano as the key case study.

In order to accommodate personnel changes and logistics, the voyage was split into 4 legs:

Leg 1: Hobart - Tonga (10 August – 19 August)

- Transit used to prepare for the science program, primarily completion and basic underway testing of the seismic system.
- Drop keels had to be raised to permit achieving the required speed given adverse weather and current at time crossing the Tasman.
- ARGO float deployments.

Leg 2: Nuku'alofa – Nuku'alofa (19 August - 5 September)

- Boarding of science party 19 August.
- Science program focused on seismic data acquisition.

Leg 3: Nuku'alofa – Nuku'alofa (5 September – 22 September)

- Partial science party personnel change on 5 September.
- Program focus on sea floor sampling, CTDs and camera tows.

Leg 4: Nuku'alofa – Brisbane (23 September – 1 October)

- Science party disembarked in Nuku'alofa.
- Transit to Brisbane via the Tonga Trench.
- Complete remaining ARGO float deployments.

This report describes the production of quality controlled underway data from RV *Investigator* voyage IN2025_V05.

To access the full voyage plan and other reports and data associated with this voyage, please see the contact information at the end of this report.

1.1 Voyage Track

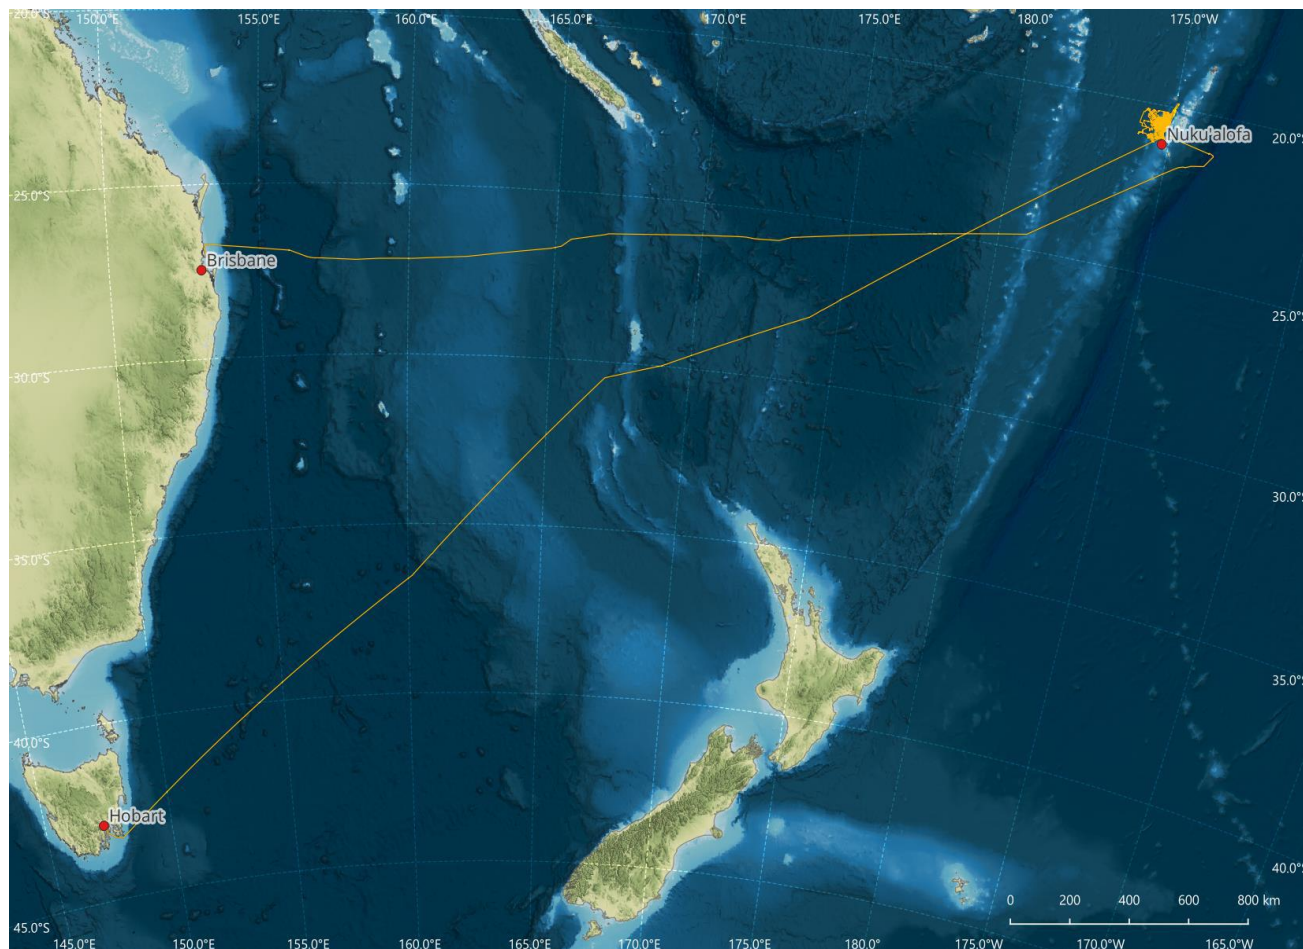


Figure 1: Voyage track including daily ship positions
Note the crossing of the 180th meridian (international date line) top right

2 Data Processing

2.1 Background Information

Navigation data are acquired using the Kongsberg Seapath 380+ position and reference unit those data are differentially corrected by data from the Fugro Seastar 3610 DGNSS Receiver.

The meteorological data consist of two port/starboard relative humidity and temperature sensors, vane-type wind sensors, LI-COR photosynthetically active radiation (PAR, light) sensors and a barometric air pressure sensor.

Data from the Integrated Marine Observing System (IMOS) sensors are also included. The sensors are port and starboard radiometers and pyranometers, and ultrasonic wind speed and direction.

Refer to the Seagoing Instrumentation Report for this voyage for details of the instruments used and their serial numbers.

Navigation, meteorological, IMOS and Thermosalinograph (TSG) data are preliminarily quality controlled by combining all data from hourly recorded files into 5-second-averaged values in a NetCDF formatted file. The combined data are referred to as “*underway data*”.

The ship-generated underway netcdf file was used as the source with a time range of: 09-Aug-2025 22:59:05 to 30-Sep-2025 23:18:40 (UTC).

Further, it should be noted that the merged data file contains additional underway sensor data that are not quality controlled or processed and are provided for completeness only. This includes data from the air sampling instruments (i.e., two ozone sensors, an absorption photometer, Picarro sensors and a sampling inlet bearing), a pCO₂ sensor, the drop keel position, the water depth and the gyroscopic compass.

For further descriptions of the instruments, their respective locations on the vessel and Underway NetCDF variables please refer to the Appendices at the end of this report.

2.2 Completeness and Data Quality

Navigation data (latitude and longitude, speed over ground, ship heading and course over ground), meteorological data (port and starboard for each of air temperature, relative humidity, relative and true wind speed and direction, PAR, rain, and atmospheric pressure), IMOS data (port and starboard radiometers and pyranometers, ultrasonic relative wind direction and speed) and thermosalinograph (TSG) data (salinity and water temperature) were evaluated and quality controlled (QC'd). It should be noted that the underway NetCDF file contains the raw unQC'd data. Therefore, even though the QC'd variable may have been set to NaN or otherwise adjusted or filtered out, the raw data variable is always available in the NetCDF underway file. This is useful if the end-user wishes to apply a different QC or filtering methodology.

Voyage Specific Data Issues:

1. Some missing data for latitude, longitude, speedOG, courseOG and shipHeading was reinstated from NMEA/GPSGG strings, otherwise no other issues found with the data, all instruments worked as expected.

2.3 Processing Comments

2.3.1 Atmospheric Pressure

Only a small section has been marked suspect otherwise no issues found with the barometric sensor. The foremast digital barometer was used.

2.3.2 Air Temperature

No issues were found with the port and starboard air temperature data. Both instruments gave very close readings with a mean absolute difference of 0.16°C.

2.3.3 Latitude/Longitude

Some missing longitude data was reinstated from NMEA/GPSGG strings, otherwise no other issues were found with latitude and longitude data. Note the vessel crossing the 180th meridian (international date line) on two occasions.

2.3.4 Humidity

No issues were found with the port and starboard humidity data. Both instruments gave very close readings with a mean absolute difference of 0.84%RH. The port sensor readings reached 100% saturation on several occasions due to the sub-tropical climate.

2.3.5 Rain

A small section of the port rain data was flagged as suspect, otherwise no other issues were found with the port and starboard rain data. Note that any differences less than 1mm are ignored due to instrument accuracy.

2.3.6 Wind Speed & Direction

Minor discrepancies between the port and starboard vane wind speed and direction readings were noted, otherwise both sensors gave very close readings. It has been observed that due to the location of the port wind sensor relative to the ship's superstructure, the instrument could experience some interference when the wind direction is from the starboard stern (appx. 130 degrees). This results in greater fluctuations in both speed and direction measurements. Likewise, the starboard wind speed and direction sensor experiences similar interference when the wind direction is from the portside stern (appx. 240 degrees). Under these conditions, if the wind direction is either in range 120-140 or 230-250 degrees and the wind speed measurement has abruptly dropped by more than 14 knots due to obstruction by the superstructure, then the corresponding sensor data is flagged as bad and set to NaN for the port or starboard respectively. Furthermore, the value of 14 knots is estimated from the mean difference in wind speed between the port and starboard sensors when the wind direction is either approximately 120-140 degrees or 230-250 degrees plus 1 standard deviation. No issues were found with the wind sensors.

2.3.7 Course Over Ground (courseOG) & Speed Over Ground (speedOG)

Ship position and speed (speedOG) are measured by differential GNSS using phase-smoothed pseudo-range and Doppler observations. When using high precision differential correction, a worldwide accuracy of 0.1-0.2 m is possible. Course over ground describes the direction of motion with respect to the ground that a vessel has moved relative to the geographic north pole. Accordingly, should a vessel be stationary, it is not travelling a course (e.g., at the wharf). Under conditions where a vessel is experiencing leeway (wind, current), a vessel's heading and courseOG may differ. This difference will typically be the largest for vessels moving at slow speeds. When the ship speed is less than 0.5 knots (25.7 cm/s), courseOG values fluctuate and are highly variable. Course and speed over the ground were recomputed from 5-second latitude and longitude values (truncated to 6 decimal places, 0.000001 degree latitude = 11.112 cm). No issues were found with

the ship's course over ground readings. The resulting course over ground values were compared to the original GPS-derived values and agreed well. When the values agree well, a slight smoothing is achieved when the ship is underway, and when the ship is almost stationary the result is similarly variable. Overall data quality is good.

2.3.8 Ship Heading

No issues were found with the ship heading data.

2.3.9 Photosynthetically Active Radiation (PAR)

Minor discrepancies between the port and starboard PAR sensor readings were noted and flagged as SUSPECT, otherwise both sensors gave very close readings. The port PAR baseline appears to be at $1 \mu\text{E}/\text{m}^2/\text{s}$ instead of zero, this is likely due to a rounding off from 0.7 to 1.0 caused by background or stray noise, or calibration offset coefficient.

2.3.10 Pyranometer

Minor discrepancies between the port and starboard Pyranometer sensor readings were noted and flagged as SUSPECT, otherwise both sensors gave very close readings. Please note that night-time observations can result in small negative offset readings ($-7 \text{ W}/\text{m}^2$), these readings are still acceptable and within the specifications of the instrument.

2.3.11 Radiometer

No issues were found with the port and starboard radiometer data. Both instruments gave very close readings with a mean absolute difference of $1.7 \text{ W}/\text{m}^2$.

2.3.12 Ultrasonic Wind Speed & Direction

When the wind is approximately from the starboard stern of the ship (appx. 100-150 degrees), the ultrasonic wind direction values can exhibit wild variations (i.e., large spikes) which are not manifested by the two vane-type wind sensors to the same extent. It is believed that this characteristic is most likely caused by the interaction of the ship's superstructure, foremast, ship motion and the wind in relation to the ultrasonic wind sensor. Furthermore, when the wind direction is from the starboard stern and the wind speed measurement has abruptly dropped by more than 14 knots due to the superstructure obstruction, then the corresponding data is flagged as bad and set to NaN. Please note that the ultrasonic sensor is mounted in close proximity and just below the port wind vane sensor resulting in closer agreement when compared with the starboard wind vane sensor. Additionally, the value of 14 knots is estimated from the mean difference in wind speed between the ultrasonic and starboard sensors when the wind direction is approximately 100-150 degrees plus 1 standard deviation. Approximately 1.5% of the data has been flagged due to obstruction by the ship's superstructure.

2.3.13 Water Temperature

No issues were found with the water temperature data.

2.3.14 Salinity

No issues were found with the salinity sensor readings. Please note that when the TSG pump is switched off (i.e., `tsgFlow` is low or close to zero) the salinity measurements start to gradually drift, subsequently these are set to NaN and the QC flag set to BAD.

2.3.15 Thermosalinograph (TSG) Calibration

During the voyage, bottle salinity samples were collected from the underway seawater supply approximately every 2-3 days, and the precise time of each sample was recorded in EVERLog. A total of 27 bottle samples (in 9 triplicate sets) were collected and analysed. These values were compared with the underway salinity measured by the TSG at the exact same date/time and then used to calculate a conductivity scaling coefficient for the TSG using Multiple Linear Regression. This resulted in a scaling coefficient of 1.00011. The residual had a standard deviation (SD) of 0.003118 PSU (target ≤ 0.01 PSU). This was then applied to the salinity data, a QC flag was set, and the data state for each data point was set to either 'good', 'suspect', 'no QC' or 'bad'. See Table 3 in section 2.5 for further information on QC flags and data states.

Salinity bottle calibration data can be found in the following downloadable file: **IN2025_V05_UWY_TSGCal_BottleResults.csv**. Refer to Appendix 4.1 for plots of salinity and conductivity residuals.

2.3.16 TSG Lag

Examination and comparison of the TSG water temperature profile against the sea surface water temperature showed a lag of approximately 2.7 minutes (160 seconds) between the two data sets and a mean thermal increase of $+0.099^{\circ}\text{C}$ from the intake keel to the TSG. This transport lag is due to the time taken for the water to flow from the water intake on the port drop keel (where sea surface water temperature is measured by the SBE38 sensor) to the TSG located in the underway seawater lab on the ship (where the TSG sensor measures the temperature and conductivity of the water pumped in from the drop keel intake). When the precise location for the TSG salinity measurement is critical, this lag needs to be accounted for to determine the exact geolocation of the sampled water. For example, assuming the ship is moving at 10 knots and it takes 2.7 minutes (transport lag) for the water to flow from the drop keel intake to the TSG, the TSG salinity measurements would be for a location about 823 meters away from the ship's location at the time of the TSG's measurements. The intake depths for the TSG and SBE38 SST intakes on the port drop keel are described in the Appendix. Additionally, the port drop keel depth extension was set to 2.0m for most of the voyage, the ship's draft is nominally at 6.0m, thus the TSG intake port is located 6.0m+2.0m (8.0m) below the water line respectively.

2.3.17 Depth

The water depth data are no longer processed as part of the underway data set. The non-QC'd depth data are available in the raw underway data. The QC'd water depth data may be obtained from the processed GSM dataset (centre beam) for this voyage.

2.3.18 Other Data Sets

Raw Underway Data

It should be noted that the underway NetCDF file contains the raw unQC'd data. Therefore, even though the QC'd variable may have been set to NaN or otherwise adjusted or filtered out, the raw data are always available in the QC'd underway file. This is useful if the end-user wishes to apply a different QC or filtering methodology.

2.3.19 Comparing Port and Starboard Sensors

The following table below compares the mean-absolute-differences and max-absolute-differences between port and starboard sensor outputs before and after QC has been applied. Please note that the **After QC** columns only account for values that are flagged as 'good'.

Sensor	Before QC		After QC		Units
	mean(abs(diff))	max(abs(diff))	mean(abs(diff))	max(abs(diff))	
Air Temperature	0.16	1.89	0.16	1.89	degrees Celsius
Humidity	0.84	19.7	0.84	19.7	%RH
Relative Wind Speed	0.92	20.28	0.92	19.99	knots
True Wind Speed	1.64	22.71	1.64	15.54	knots
Relative Wind Direction	15.62	180	15.45	180	degrees
True Wind Direction	15.54	180	15.53	180	degrees
PAR	29.43	1576	28.54	1576	$\mu\text{E}/\text{m}^2/\text{s}$
Pyranometer	12.98	751.7	12.84	751.7	W/m^2
Radiometer	1.72	53	1.72	53	W/m^2
Rain	0.02	9.18	0.02	8.59	mm

Table 1: Port and starboard sensor statistics before and after QC

2.4 Final Underway Data

The following table below provides a list of sensor names, the corresponding QC flag name and percentage GOOD, SUSPECT, BAD and MISSING data. Note that the salinity is uncalibrated.

	Parameter Name	parameterQC	% Good	% Suspect	% Bad	% Missing
1	latitude	latitudeQC	100	0	0	0
2	longitude	longitudeQC	100	0	0	0
3	speedOG	speedOGQC	100	0	0	0
4	courseOG	courseOGQC	100	0	0	0
5	shipHeading	shipHeadingQC	99.96	0	0	0.04
6	portAirTemp	portAirTempQC	100	0	0	0
7	stbdAirTemp	stbdAirTempQC	100	0	0	0
8	portHumidity	portHumidityQC	100	0	0	0
9	stbdHumidity:	stbdHumidityQC	100	0	0	0
10	atmPressure:	atmPressureQC	100	0	0	0
11	portRelWindDir	portRelWindDirQC	99.83	0.05	0.12	0
12	stbdRelWindDir	stbdRelWindDirQC	99.85	0.04	0.11	0
13	portTrueWindDir	portTrueWindDirQC	99.99	0	0.01	0
14	stbdTrueWindDir	stbdTrueWindDirQC	99.99	0	0.01	0
15	portRelWindSpeed	portRelWindSpeedQC	100	0	0	0
16	stbdRelWindSpeed	stbdRelWindSpeedQC	100	0	0	0
17	portTrueWindSpeed	portTrueWindSpeedQC	100	0	0	0
18	stbdTrueWindSpeed	stbdTrueWindSpeedQC	100	0	0	0
19	maxWindGust	maxWindGustQC	100	0	0	0
20	portRain	portRainQC	99.95	0.05	0	0
21	stbdRain	stbdRainQC	100	0	0	0
22	portPAR	portPARQC	99.87	0.13	0	0
23	stbdPAR	stbdPARQC	99.97	0.03	0	0
24	portPyranometer	portPyranometerQC	99.93	0.07	0	0
25	stbdPyranometer	stbdPyranometerQC	100	0	0	0
26	portRadiometer	portRadiometerQC	100	0	0	0
27	stbdRadiometer	stbdRadiometerQC	100	0	0	0
28	ultrasonicRelWindSpeed	ultrasonicRelWindSpeedQC	98.41	0	1.59	0
29	ultrasonicTrueWindSpeed	ultrasonicTrueWindSpeedQC	98.83	0	1.17	0
30	ultrasonicRelWindDir	ultrasonicRelWindDirQC	98.41	0.2	1.39	0
31	ultrasonicTrueWindDir	ultrasonicTrueWindDirQC	99.92	0.02	0.06	0
32	salinity	salinityQC	95.67	0	3.78	0.55
33	waterTemp	waterTempQC	99.45	0	0	0.55

Table 2: Final underway (CSV) QC'd data

2.5 Commonly Used QC Flags

The underway datasets include quality control (QC) flags which are described in more detail in reference (Pender, 2000). Normally however only a small subset is used. Below are the most commonly used QC flags. Please note that on some systems and file formats, e.g., NetCDF, it is not possible to store unsigned byte values. In this case, flags greater than 127 are stored as negative numbers. To convert them to unsigned integers, simply add 256.

Signed	Unsigned	Description	Data State	Operation Type	Error Type
-123	133	Bad (data are set to NaN)	Bad	None	Error Flagged by processor
0	0	Good	Good	None	No error, data are good
-187	69	Suspect (data unchanged)	Suspect	None	Error flagged by processor
-135	121	Operator adjusted	Suspect	Manually adjusted	Data out of range
-115	141	Data missing	Bad	None	No data, missing for an unknown reason
-53	203	Not QC'd	No QC	None	Preliminary processing (calibration) only
-199	57	Operator adjusted	Good	Manually Adjusted	Data out of range

Table 3: QC flag descriptions

2.6 Final Distribution Dataset Files

The final datasets for publication and distribution: The navigation, meteorological and Thermosalinograph data are entered into the O&A divisional data warehouse. All data timestamps are in UTC. Please note that the csv files contain only the QC'd variables listed in [Table 4](#).

File Name	Description
IN2025_V05_UWY_5sec.csv	5-second resolution CSV format dataset of QC'd parameters
IN2025_V05_UWY_10sec.csv	10-second resolution CSV format (interpolated) dataset of QC'd parameters
IN2025_V05_UWY_1min.csv	1-minute resolution CSV format (interpolated) dataset of QC'd parameters
IN2025_V05_UWY_5min.csv	5-minute resolution CSV format (interpolated) dataset of QC'd parameters
IN2025_V05_UWY.nc	5-second resolution in NetCDF format full dataset including unQC'd data
IN2025_V05_UWY.mat	5-second resolution in MATLAB format full dataset including unQC'd data
IN2025_V05_UWY_TSGCal_BottleResults.csv	TSG Salinity calibration sample bottle data

Table 4: Final underway dataset files

3 References


The RV Investigator. Voyage Plans Retrieved from Marine National Facility: Voyage Plans and summaries:

https://www.csiro.au/en/about/facilities-collections/MNF/Voyages-schedules/Voyages/2025/August/IN2025_V05


4 Appendices

4.1 TSG Calibration Residuals

Conductivity Calibration Residuals.

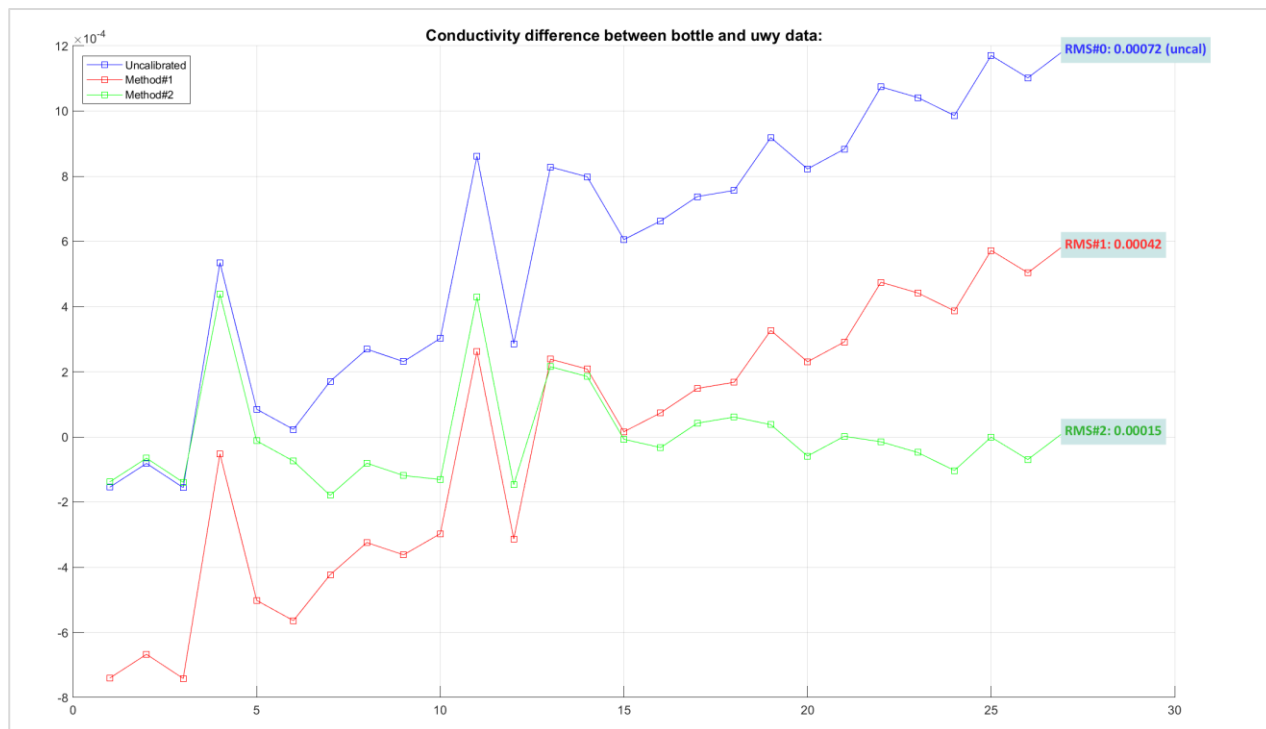

Salinity Calibration Residuals:

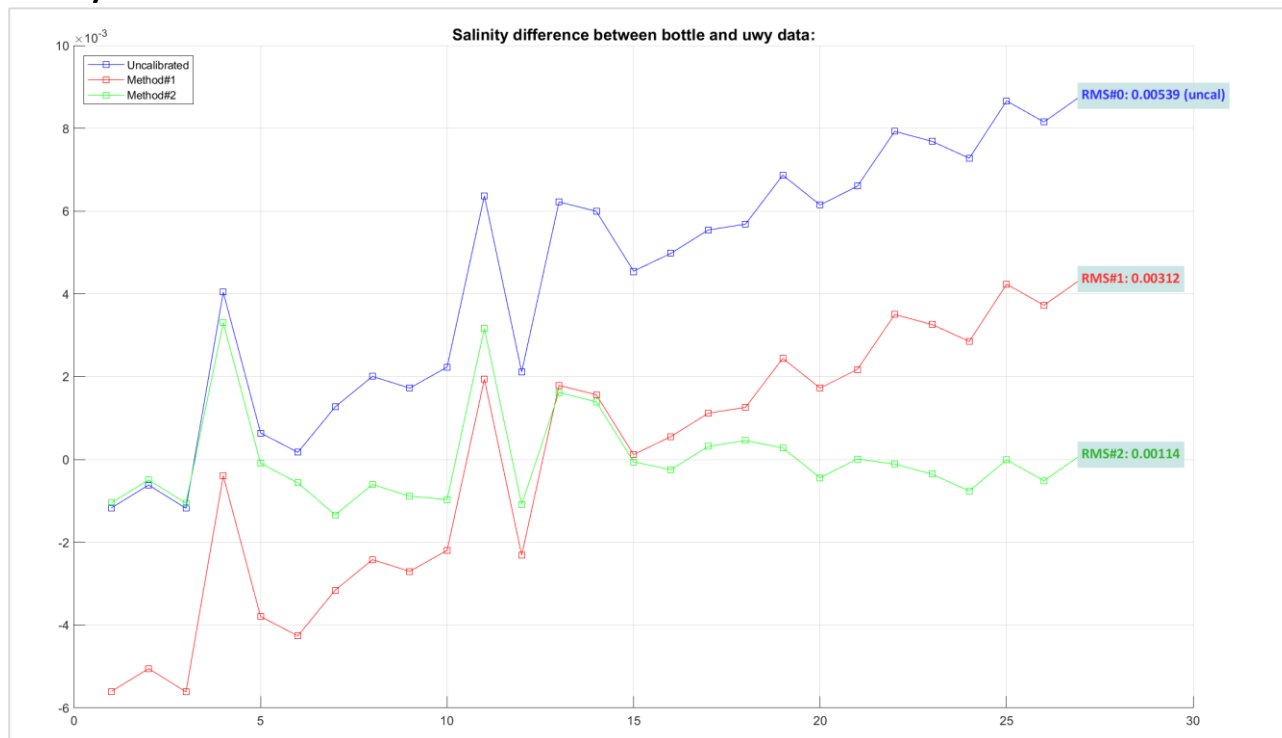

Refer to section 2.3.15 for details.

4.2 File Attributes:

Conventions	COARDS
Ship	Investigator
Voyage	in2025_v05
Epoch	19090745 seconds since 2025-01-01 00:00:00 00
SampleInterval	5
MaxInterpolationSpan	24
SamplingUnits	Sampling interval is in seconds; max. interpolation span is in samples
Voyage_UWY_Code_Revision	V.5.02 R2024b
Voyage_Data_Processor	Dirita (CSIRO E&T Data Acquisition & Processing)
Voyage_ID	in2025_v05uwy
Voyage_Title	Eruption; destruction and seafloor ecosystem recovery “Tonga 2022 eruption of the century”
Voyage_Type	Research
Voyage_Embargo_Status	none
Voyage_Institution	CSIRO Australia
Voyage_Vessel_Identifier	MNF RV Investigator (Australia)
Voyage_Depart_Port	Hobart (TAS)
Voyage_Return_Port	Brisbane (QLD)
Voyage_Depart_Date	1000 Sunday; 10th August 2025
Voyage_Return_Date	0900 Wednesday; 1st October 2025
Voyage_DaysAtSea	52.01
Voyage_Latitude_Range	-63.1452
Voyage_Longitude_Range	-179.9998 179.9999
Voyage_Processing_Commenced	6/11/2025 9:24
Voyage_Processing_Completed	...
Voyage_First_Sample_Data_Date	9/08/2025 22:59
Voyage_Last_Sample_Data_Date	30/09/2025 23:18
Voyage_Chief_Scientist	...
Voyage_Manager	...
portRelWindSpeed_Thresholds	8 12 7
portTrueWindSpeed_Thresholds	8 12 7
stbdRelWindSpeed_Thresholds	8 12 7
stbdTrueWindSpeed_Thresholds	8 12 7
ultrasonicRelWindSpeed_Thresholds	8 12 7
ultrasonicTrueWindSpeed_Thresholds	8 12 7
portRelWindDir_Thresholds	60 90 7
portTrueWindDir_Thresholds	60 90 7
stbdRelWindDir_Thresholds	60 90 7
stbdTrueWindDir_Thresholds	60 90 7
ultrasonicRelWindDir_Thresholds	45 75 7
ultrasonicTrueWindDir_Thresholds	45 75 7
courseOG_Thresholds	60 90 7
maxWindGust_Thresholds	8 12 7

4.3 Underway Sensors

The table below contains the descriptions of the ship's underway sensors and NetCDF variables.

Underway Data Instrument and Identifier	Sensor Description	Position	NetCDF variable	QC	Variable Description	Variable units
Navigation Instruments:						
Seapath 380+ with Seatex MRU 5+ and FUGRO Seastar 3610 DGNSS receiver	DGPS system providing position, attitude, velocity, acceleration and timing information.	Monkey Island & Bridge equipment room				
			Longitude	yes	Longitude	degrees East
			Latitude	yes	Latitude	degrees North
			speedOG	yes	Ship speed over ground	knots
			courseOG	yes	Ship course over ground	degrees
			shipHeading	yes	Heading of the ship	degrees
			alt	no	Altitude re: mean sea level (geoid)	meters
Northrup Grumman Sperry 4914-CA Navigat X MK1	Gyrocompass	Bridge				
			gyroHeading	No	Gyro Heading	degrees
Kongsberg Maritime Skipper DL850	3 Axis doppler log - measuring vessel speed through water	Gondola	(no data)			
			longitudinalWaterSpeed	No	Longitudinal water speed	knots
			transverseWaterSpeed	No	Transversal water speed	knots
			longitudinalGroundSpeed	No	Longitudinal ground speed	knots
			transverseGroundSpeed	No	Transversal ground speed	knots
			lockOnWater	No	Lock on water flag	n/a
			lockonGround	No	Lock on the ground flag	n/a
Seawater Instruments:						
Sea-Bird-SBE 21 TSG	Thermosalinograph (TSG)	CTD Space				
			salinity	Yes	Measures sea surface salinity	Practical Salinity Units (PSU)
			tsgSensorTemp	No	Water temperature measurement in the TSG canister	degrees Celsius (degC)
Burkert 8045	Flow meter	CTD space				
			tsgFlow	No	Flow rate of seawater through the TSG	L/min

Burkert 8045	Flow meter	Underway Seawater Lab				
			labMainFlow	No	Underway lab main seawater flow rate	L/min
Kobold MIK-C	Flow meter	Underway Seawater Lab				
			labBranchFlow	No	Underway lab branch seawater flow rate	L/min
Sea-Bird - SBE 38	Remote Temperature Probe	Port Drop Keel				
			waterTemp	Yes	Sea surface water temperature measurement	degrees Celsius (degC)
Wet Labs Wetstar Fluorometer	Fluorometer	Underway Seawater Lab				
			fluorescence	No	Measures active phytoplankton biomass and chlorophyll concentrations	percentage of the full-scale voltage (%)
CSIRO Hobart pCO₂	Underway pCO ₂ system measuring surface water CO ₂ mole fraction	Underway Seawater Lab				
			equTemp	No	Equilibrator water temperature	degrees Celsius (degC)
			XCO2	No	XCO2	ppm
			waterVapour	No	Water vapour	mmol/mol
			licorPressure	No	Licor pressure	hPa
			equPressure	No	Equilibrator pressure	hPa
			waterFlow	No	Water flow	L/min
			licorFlow	No	Licor flow	mL/min
			ventFlow	No	Vent Flow	mL/min
			condTemp	No	Condenser Temperature	degrees Celsius (degC)
			pumpSpeed	No	CO2 Pump Speed	L/min
Aanderaa Oxygen Optode 3835	Oxygen Sensor	Underway Seawater Lab				
			do		oxygen	μM
			doSaturation		Air saturation	percentage (%)
			optodeWaterTemp		Optode water temperature	degrees Celsius (degC)
CSIRO Drop keel sensor	Measuring drop keel draft	Port & starboard				
			portKeelExtension		Port drop keel extension	meters
			starboardKeelExtension		Starboard drop keel extension	meters
Meteorological Instruments:						

Rotronic T&RH HC2A-S3	Temperature and Humidity Sensor	Foremast (Starboard)				
			stbdAirTemp	Yes	Starboard air temperature measurement	degrees Celsius (degC)
			stbdHumidity	Yes	Starboard humidity measurement	percentage (%)
			stbdDewPoint	Yes	Starboard Dew Point	degrees Celsius (degC)
Rotronic T&RH HC2A-S3	Temperature and Humidity Sensor	Foremast (Port)				
			portAirTemp	Yes	Port air temperature measurement	degrees Celsius (degC)
			portHumidity	Yes	Port humidity measurement	percentage (%)
			portDewPoint	Yes	Port Dew Point	degrees Celsius (degC)
Vaisala Ship's Barometer PTB330	Atmospheric pressure	Bridge Wing	atmPressureBridge	Yes	Atmospheric pressure measurement	millibar (mbar)
Vaisala Ship's Barometer PTB330	Atmospheric pressure	Foremast	atmPressure	Yes	Atmospheric pressure measurement	millibar (mbar)
RM Young Wind Sensor Type 05107	Vane type wind sensor	Foremast (Port)				
			portRelWindSpeed	Yes	Wind speed relative to the ship	knots
			portRelWindDir	Yes	Wind direction relative to the ship	degrees
			portTrueWindSpeed	Yes	True wind speed, corrected for ship speed	knots
			portTrueWindDir	Yes	True wind direction, corrected for ship heading	degrees
			maxWindGust	Yes	True maximum wind gust corrected for ship speed	knots
RM Young Wind Sensor Type 05108	Vane type wind sensor	Foremast (Starboard)				
			stbdRelWindSpeed	Yes	Wind speed relative to the ship	knots
			stbdRelWindDir	Yes	Wind direction relative to the ship	degrees
			stbdTrueWindSpeed	Yes	True wind speed, corrected for ship speed	knots
			stbdTrueWindDir	Yes	True wind direction, corrected for ship heading	degrees
Gill WindObserver II	Ultrasonic Wind Sensor	Foremast (Port)				
			ultrasonicRelWindSpeed	Yes	Wind speed relative to the ship	knots

			ultrasonicRelWindDir	Yes	Wind direction relative to the ship	degrees
			ultrasonicTrueWindSpeed	Yes	True wind speed, corrected for ship speed and direction	knots
			ultrasonicTrueWindDir	Yes	True wind direction, corrected for ship speed and heading	degrees
RM Young Rain Gauge type 50202	Syphoning Rain Sensor	Foremast				
			portRain	Yes	Accumulated hourly rain	mm
			stbdRain	Yes	Accumulated hourly rain	mm
Eppley PIR	Precision Infrared Radiometer	Monkey Island (Starboard)				
			stbdRadiometer	Yes	Measure radiation in the band 4-100 micron, longwave radiation	W/m ²
Eppley PIR	Precision Infrared Radiometer	Monkey Island (Port)				
			portRadiometer	Yes	Measure radiation in the band 4-100 micron, longwave radiation	W/m ²
Eppley PSP	Precision Spectral Pyranometer	Monkey Island (Starboard)				
			stbdPyranometer	Yes	Measure radiation in the band 0.2 - 4 micron, shortwave radiation	W/m ²
Eppley PSP	Precision Infrared Radiometer	Monkey Island (Port)				
			portPyranometer	Yes	Measure radiation in the band 0.2 - 4 micron, shortwave radiation.	W/m ²
LI-COR LI-190 Quantum Sensor	Photosynthetically Active Radiation	Monkey Island (Starboard)				
			stbdPAR	Yes	measures radiation in the photosynthetically active region of 0.4-0.7 micron	μE/m ² /s
LI-COR LI-190 Quantum Sensor	Photosynthetically Active Radiation	Monkey Island (Port)				
			portPAR	Yes	measures radiation in the photosynthetically active region of 0.4-0.7 micron	μE/m ² /s
Uni-Southampton ISAR SST	Radiation sea surface temperature	Bridge Wing (Port)				

			isarWaterTemp	No	ISAR Water Temperature	degrees Celsius (degC)
Air Sampling Systems:						
CSIRO air sampling inlet	Air inlet controller	foremast				
			inletBearing	No	Air sampling inlet bearing	degrees
			trackingBearing	No	Tracking target bearing	degrees
Thermo Scientific MAAP Model 5102	Multi-angle Absorption Photometer (MAAP)	Aerosol Lab (air sampling inlet)				
			blackCarbonConc	No	Concentration of black carbon	µg/m ³
			airFlow	No	Air flow rate	litres per Hour (L/h)
Thermo Scientific Model 49i Ozone Analyzer	Ozone Monitor					
			o3Ozone1	No	Ozone measurement	ppb
			ozone1Meterflags	No	Instrument specific quality flag	n/a
Thermo Scientific Model 49i Ozone Analyzer	Ozone Monitor					
			o3Ozone2	No	Ozone measurement	ppb
			ozone2Meterflags	No	Instrument specific quality flag	n/a
Picarro Model G2301 CRDS Analyzer	Greenhouse Gas Spectrometer CO ₂ , CH ₄ , H ₂ O Near IR Laser					
			co2Dry	No	CO ₂ dry concentration	ppm
			ch4Dry	No	CH ₄ dry concentration	ppm
			H2O	No	Water concentration percentage	percentage (%)
Depth Sounders:						
Kongsberg EM124 multibeam sounder		Gondola	depth	No	Water depth,	meters
Kongsberg EM712 multibeam sounder		Gondola	depth	No	Water depth,	meters
EK80, 18KHz sounder		Port Drop Keel	Depth, (if not provided by EM124 or EM712)	No	Water depth	meters

Table 5: Ship's underway sensors and NetCDF variables

4.3 Location of Meteorological Instruments

Date:		26/03/2019				
Surveyors:		Stuart Edwards				
		Matt Boyd				
		CSIRO GSM Team				
Instrument:		Leica TCRP 1205+ Total Station AND extrapolation from drawings				
Sensors surveyed with respect to existing vessel coordinate system:						
		X-axis is positive toward starboard and perpendicular to Y -axis				
		Y-axis is positive forward and parallel to vessel centreline keel				
		Z-axis is positive upwards				
CRP is MRU5+ located in transceiver room on 1st platform deck						
MRU5+ is 2.066m to Starboard of the V/L centreline & 53.439m fwd from transom. (Obtained from Parker Maritime)						
ΔH of Load Line measured from 02 level with Plumbob and tape, 9m from 02 Deck. Height of 02 deck calculated to be 8.707m above CRP on 1st Plat deck. Load Line height datum below vessel CRP						
ID	Description	X	Y	Z	Comment	Final Height Above Summer Load Line
LL	Summer Load Line	7.222	-10.695	-0.293	Waterline reference	0.000
WS1	Foremast Propeller Anemometer Stbd	-0.513	35.811	24.487	Measured to base of sensor	24.780
WS2	Foremast Propeller Anemometer Port	-3.361	35.867	24.228	Measured to base of sensor	24.521
WS3	Foremast Gill Ultrasonic Anemometer	-3.344	35.986	21.812	Measured to base of sensor	22.105
WS4	Precipitation Sensor Siphoning Port (formerly called "Central")	-2.621	35.999	21.260	Measured to base of sensor	21.553
WS10	Monkey Island Radiometer Plate Stbd	-0.164	-0.430	24.980	Measured to centre bottom face of disc	25.273
WS11	Monkey Island Radiometer Plate Port	-3.753	-0.389	24.927	Measured to centre bottom face of disc	25.220
WS12	Bridge Digital Barometer	-1.559	-4.243	20.265	Measured to centre of unit	20.558
WS13	SST Radiometer (Port Bridge Wing)	-11.77	-3.3	19.3	Measured to centre of bottle (Taped Measurement)	19.593
	Foremast T&RH Sensor (Port)	-2.636	35.1	24.451	Relative measurements and estimates from drawings	24.744
	Foremast T&RH Sensor (Starboard)	-1.253	35.101	24.451	Relative measurements and estimates from drawings	24.744
	Precipitation Sensor Siphoning (Starboard)	-1.241	35.101	21.260	Relative measurements and estimates from drawings	21.553
	Foremast Digital Barometer	-3.316	32.596	9.61	Relative measurements and estimates from drawings	9.903

Table 6: Location of meteorological instruments mounted on RV Investigator

4.4 Drop Keel Instrumentation Positioning

	Reference Point	Vertical Offset in metres (positive up)			
Drop Keel Position		Flush with hull	Flush with gondola	Intermediate	Fully extracted
Drop Keel Extension	Base of Hull	0.00	-1.194	-2.00	-4.00
Base of Hull	Ship's Central reference Point (CRP)	-6.54			
Base of Drop Keel	CRP	-6.54	-7.73	-8.54	-10.54
SBE38 SST Intake	Base of Drop Keel	0.30			
SBE38 SST Intake	CRP	-6.24	-7.43	-8.24	-10.24
Summer Load Line (SLL)	CRP	-0.29			
SBE38 SST Intake	SLL (i.e., Depth below waterline)	-5.95	-7.14	-7.95	-9.95
TSG Intake	Base of Drop Keel	0.54			
TSG Intake	CRP	-6.00	-7.19	-8.00	-10.00
TSG Intake	SLL (i.e., Depth below waterline)	-5.71	-6.90	-7.71	-9.71

Table 7: Drop keel instrumentation positioning

As Australia's national science agency and innovation catalyst, CSIRO is solving the greatest challenges through innovative science and technology.

CSIRO. Unlocking a better future for everyone.

Contact us

1300 363 400
+61 3 9545 2176
www.csiro.au/contact
www.csiro.au

For further information

National Collections and Marine Infrastructure
Information and Data Centre
HF-Data-Requests@csiro.au
research.csiro.au/ncmi-idc
www.csiro.au/en/about/people/business-units/NCMI