

data summary

Southern Surveyor Voyage ss2010_t04



Table of Contents

Table of Contents	2
<i>ss2010_t04</i>	3
Title	3
Principal Investigators	3
Ports	3
Date	3
Voyage Track	4
Underway Data	4
Completeness and Data Quality	5
Processing Comments	5
Final Underway Data.....	7
References	8

ss2010_t04

Title

“An examination of the temperate reef and deep sea benthic fauna of the south eastern Australian shelf and the trophic relationships between euphausiids and larval fish”

Principal Investigators

Dr Sebastian Holmes (Chief Scientist/Benthic Invertebrates)
The University of Sydney (USYD).
sholmes@usyd.edu.au Tel: 02 9351 5637

Ports


Original schedule (local time):

Depart: Sydney 06:00hrs, Wednesday 3rd November, 2010.
Arrive: Hobart 18:00hrs, Sunday 7th November, 2010.

Date

02-Nov-2010 19:00 to 07-Nov-2010 20:51 (UTC)

Voyage Track

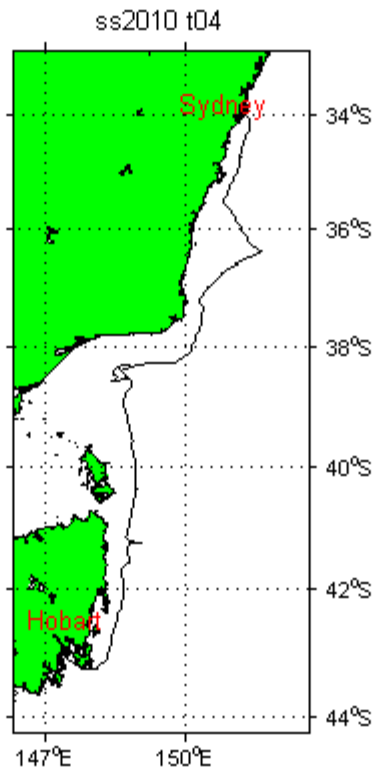

Underway Data

Navigation data is acquired using the Seapath 200 position and reference unit, which is also differentially corrected by data from the FUGRO DGPS receiver.

The Meteorological data consists of 2 relative humidity and temperature sensors; a barometer, wind sensor, and licor light sensor.

Thermosalinograph data is acquired with a Seabird TSG and remote temperature by SBE 3T. Data from a flow meter is also recorded.

Digital depth data is recorded from a Simrad EK60 sounder. Echograms are also recorded using SonarData's Echolog software. Digital depth data can be re-picked using SonarData's Echoview software.

Data from "IMOS" (Integrated Marine Observing System) sensors are also included. The sensors are port and starboard radiometers and pyranometers, wind speed and direction; rain and rainrate.

See Electronics report for this voyage for instruments used and their serial numbers.

Navigation, meteorological, thermosalinograph, IMOS and depth data are quality controlled by combining all data from hourly recorded files to 5 second values in a netCDF formatted file. The combined data is referred to as "underway data".

A combined file was made on 6-July-2011 by running a Java application, written by Lindsay Pender of CMAR, UwyMerger version 1.3 with data time range of 02-Nov-2010 19:00 to 07-Nov-2010 20:51 (UTC).

Completeness and Data Quality

Navigation data (latitude and longitude, speed over ground, ship heading and course over ground); meteorological data (port and starboard air temperature, port and starboard humidity, wind direction and speed, maximum wind gust, light, atmospheric pressure, uncorrected wind direction, rain and speed) and IMOS data (port and starboard radiometers, port and starboard pyranometers, derived wind direction and speed, uncorrected wind direction and speed, rain and rain rate), thermosalinograph (salinity and water temperature) data and depth data were evaluated and quality controlled.

Processing Comments

A number of minor discrepancies between the port and starboard air temperature sensors were noted (max differences of about 1.2 degrees, otherwise both sensors gave very close reading with the mean absolute difference of about 0.039 degrees). These occurred usually during periods of rapid temperature increase or decrease. Investigation of these indicated that they have usually occurred when the ship was stationary with little wind or during/following periods of rainfall. This phenomenon has probably come about due to the rapid warming of air due to the ship becoming stationary or cooling of the air temperature due to the evaporation of the rain water around the sensor housing. It is unclear as to why there should be a notable temperature differential between the port and starboard temperature sensors.

A similar discrepancy (max differences of about 10.19%) between the port and starboard humidity sensors was observed. It should also be noted that the starboard humidity sensor appears to consistently give a higher humidity reading with the mean absolute difference of about 1.39%. The recorded values appear to be within instrument tolerance.

A gap in the met and IMOS data between 03-Nov-2010 12:19:00 to 22:34:40 was noted. The reason for this was due to the metstation being down. No explanation was provided in the voyage computing or electronic report as to the reason for this. The data for this period was QCed as bad.

A number of rapid temperature changes were noted (e.g. rise or drops of around 3-5 degrees during a short period of time) for both port and starboard temperature sensors.

These rapid temperature changes were most likely due to the warming up effect of the ship's metal structures and/or the engine exhaust blowing over the sensors, when the wind is blowing on the stern of the ship or the ship is stationary with little wind or being hit by a cold/warm front. The sensor values for the ship speed, uncorrected wind direction, wind speed and port/starboard temperature were closely examined for correlation and the following two conditions were indentified as usually prevalent during the periods of rapid temperature changes (in particular temperature rise):

- 1) The ship stationary with no or low wind speed in the region of 5 knots blowing on the stern (i.e. uncorrected wind direction around 135 to 225 degrees).

- 2) The ship cruising at about 8-10 knots with wind speed in the region of 10-40 knots blowing on the stern (i.e. uncorrected wind direction around 135 to 225 degrees).

Periods of rapid changes are suspect for reasons highlighted above, otherwise the data is good.

The wind speed had a number downward spikes. These were investigated and the cause was attributed to apparent anomalous raw wind direction (uncorrWindDir) data. The wind speed is derived from uncorrected wind speed and wind direction plus a few other parameters. Examination of the underlying data revealed possible anomalous raw wind direction data which coincided with the downward spikes in the derived wind speed.

After careful consideration of this problem by MNF electronics support, it was suggested that this is simply a phenomenon associated with disturbed airflow when the wind is generally from the stern of the vessel and the fact that this sensor is a wind vane or “weather-cocking” type (rather than ultrasonic).

Therefore obvious identifiable windSpeed spikes were manually set to NaN along with the corresponding values for uncorrWindDir, uncorrWindSpeed, windDir and maxWindGust with their QG flags set to {'bad','none','operatorFlagged'}. The QCing process was undertaken with reference to IMOSWindSpeed sensor.

The courseOG values when the ship is stationary are not true values as the ship is not travelling a course however this is a feature of the current acquisition system. The QC flags have been set as good however this feature should be noted if the values during the stationary periods are to be used.

The readings from the foremast IMOSRain sensor (which is an optical type) was inconsistent with the foremast funnel/siphoning type rain sensor. This was initially considered to be unusual because the optical IMOSRain sensor reading was expected to be similar to those from the foremast funnel/siphoning sensor. However, further investigation of this issue across a number of voyages indicated a very close correlation between periods of strong winds or rough sea/swells and the times that the optical IMOSRain sensor recordings indicated significantly higher rain level than the foremast funnel/siphoning rain sensor. It is suspected that the higher IMOSRain sensor recordings are due to water spray from the breaking of waves against the bow of the ship and wind-carried spray from the rough seas which are more likely to interrupt the optical sensor beam path and less likely to enter the funnel at the top of the funnel/siphoning sensor. The foremast rain sensors are virtually co-located. Moreover, the reverse of this situation has also been observed whereby during periods of relative calmness (i.e. low wind and slow/stationary ship) the funnel/siphoning sensor shows notably higher rain than the optical sensor.

It was noted that IMOS starboard Radiometer recordings were mostly about 3 (W/m^2) greater than the port Radiometer recordings throughout the voyage.

The depth data was re-picked using Sonar Data’s Echoview software. Due to incorrect system settings no echogram data were recorded for depths below 1500m. Where available swath centre beam data was used to QC depth data without echograms. No GPS position data

(lat/long) was recorded in the echogram files. This is not a big issue as this data is available in the underway NetCDF file. The main periods without QCed depth data are noted below:

02-Nov-2010 19:00:00 to 02-Nov-2010 21:09:20
02-Nov-2010 23:22:05 to 02-Nov-2010 23:31:35
03-Nov-2010 14:34:40 to 03-Nov-2010 14:49:05
03-Nov-2010 16:12:30 to 03-Nov-2010 19:50:30
04-Nov-2010 09:57:50 to 04-Nov-2010 11:43:35
04-Nov-2010 14:39:05 to 04-Nov-2010 14:41:15
05-Nov-2010 07:58:40 to 05-Nov-2010 11:48:55
05-Nov-2010 18:45:20 to 05-Nov-2010 20:41:10
06-Nov-2010 22:34:00 to 06-Nov-2010 22:39:50
07-Nov-2010 07:53:10 to 07-Nov-2010 09:37:05
07-Nov-2010 09:41:30 to 07-Nov-2010 09:53:30

During the processing of recent voyages TSG/CTD calibration runs, the examination of the overlapped salinity plots have shown a notable discrepancy in the TSG salinity relative to the CTD salinity. The investigation of this anomaly has not been conclusive so far. However examination of TSG data has revealed that if the TSG conductivity is advanced by about 32 seconds relative to the TSG sensor temperature, when calculating the derived salinity, a significant improvement in TSG salinity relative to the CTD salinity is obtained. Whilst this issue is being investigated further, a conductivity lag correction factor is introduced as part of TSG calibration and utilised for the calculation and processing of TSG salinity. This lag factor is henceforth documented in this processing report.

There were not CTD/TSG calibration conducted on this voyage, therefore the scaling factor of 1.001052485796954 from the previous voyage (ss2010_v09) was used along with a TSG conductivity lag of 32 seconds and applied to the TSG salinity data and the thermosalinograph salinity QC was set to { 'good' , 'manually adjusted' , 'no error' }.

Note: All 2010 underway voyage data is acquired and preliminary processed by the TECHSAS and uwyMerger acquisition system respectively. It should further be noted that the following data and their QC flags are not supported in the TECHSAS/uwyMerger acquisition system: maxWindGustDir, maxWindGustDirQC, IMOSMaxWindGust, IMOSMaxWindGustQC, IMOSMaxWindGustDir, MOSMaxWindGustDirQC.

Final Underway Data

The navigation, meteorological, thermosalinograph, IMOS and depth data will be entered into the CMAR divisional data warehouse. All data timestamps are in UTC.

Filename	Parameters	Resolution
ss2010_t04uwy10.csv	latitude, latitudeQC, longitude, longitudeQC, speedOG, speedOGQC, courseOG, courseOGQC, shipHeading, shipHeadingQC, uncorrWindDir, uncorrWindDirQC, uncorrWindSpeed, uncorrWindSpeedQC, waterDepth, waterDepthQC, portAirTemp, portAirTempQC, stbdAirTemp, stbdAirTempQC, portHumidity, portHumidityQC, stbdHumidity, stbdHumidityQC, windSpeed, windSpeedQC, maxWindGust, maxWindGustQC, windDir, windDirQC, PAR, PARQC, atmPressure, atmPressureQC, waterTemp, waterTempQC, salinity, salinityQC, IMOSStbdRadiometer, IMOSStbdRadiometerQC, IMOSStbdPyranometer, IMOSStbdPyranometerQC, IMOSRainRate, IMOSRainRateQC, IMOSRain, IMOSRainQC, IMOSWindSpeed, IMOSWindSpeedQC, IMOSWindDir,IMOSWindDirQC, IMOSPortRadiometer, MOSPortRadiometerQC, IMOSPortPyranometer, IMOSPortPyranometerQC, IMOSUncorrWindSpeed,MOSUncorrWindSpeedQC, IMOSUncorrWindDir,IMOSUncorrWindDirQC rain, rainQC	10 seconds
ss2010_t04uwy5min.csv	Ditto 10 second data	5 minutes
ss2010_t04pdr10.csv	latitude, latitudeQC, longitude, longitudeQC, waterDepth, waterDepthQC	10 seconds

References

Subversion repository version of DPG Matlab generic tools 1488

Pender, L., 2000. Data Quality Control flags.

http://www.marine.csiro.au/datacentre/ext_docs/DataQualityControlFlags.Pdf

Processed by: A Sarraf , CSIRO Marine and Atmospheric Research, Hobart, Tasmania, Australia